


# KELOX

## KMW410 KELOX-ULTRAX-W coupling 25/25

71300EE0

### Areas of application

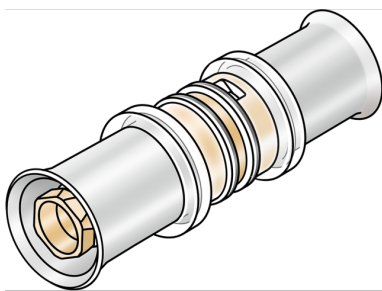

?Zeta value-optimised press-fit coupling, equal or reduced, made from dezincification-resistant (DZR) brass, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing

### Approvals:



# Specifications

## Article information


|               |            |
|---------------|------------|
| port 1        | Pressmuffe |
| port 2        | Pressmuffe |
| execution     | 1-part     |
| design        | gerade     |
| press contour | U          |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                         |
|---------------------|-------------------------|
| VPE1                | 5,00 SA1                |
| VPE2                | 40,00 KT1               |
| VPE3                | 2400,00 PAL             |
| weight              | 0,113 KGM               |
| text                | KELOX-ULTRAX-W coupling |
| INTRNR              | 74122000                |
| main material group | KELOX                   |
| code                | KMW410                  |

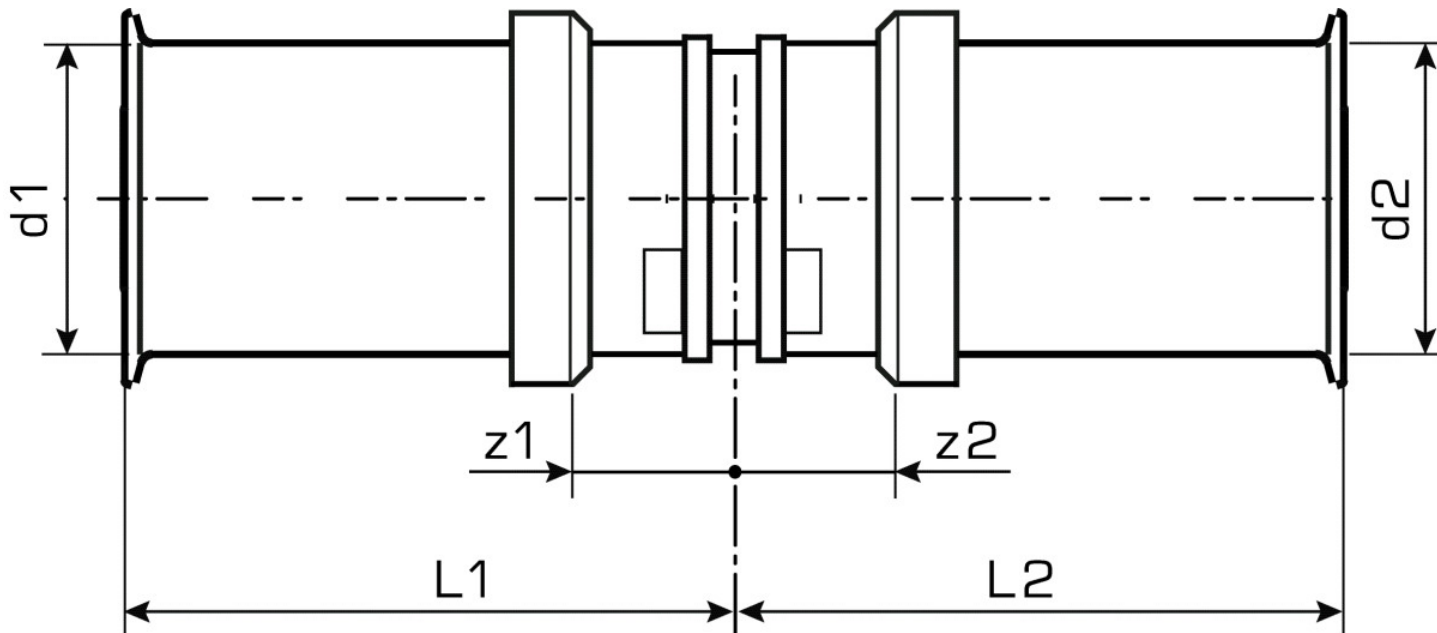

| Art. No  | label | d1 mm | d2 mm | L1 mm | L2 mm | z1 mm | z2 mm |
|----------|-------|-------|-------|-------|-------|-------|-------|
| 71300EE0 | 25/25 | 25    | 25    | 39    | 39    | 9     | 9     |