


KELOX

KMW410 KELOX-ULTRAX-W coupling 32/20

71300FD0

Areas of application

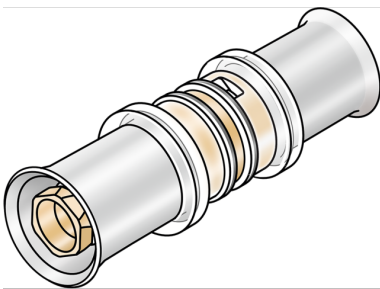

?Zeta value-optimised press-fit coupling, equal or reduced, made from dezincification-resistant (DZR) brass, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing

Approvals:



Specifications

Article information

| | |
|---------------|------------|
| port 1 | Pressmuffe |
| port 2 | Pressmuffe |
| execution | 1-part |
| design | gerade |
| press contour | U |

Technical properties

| | |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

Product information

| | |
|---------------------|-------------------------|
| VPE1 | 5,00 SA1 |
| VPE2 | 40,00 KT1 |
| VPE3 | 2400,00 PAL |
| weight | 0,097 KGM |
| text | KELOX-ULTRAX-W coupling |
| INTRNR | 74122000 |
| main material group | KELOX |
| code | KMW410 |



| Art. No | label | d1 mm | d2 mm | L1 mm | L2 mm | z1 mm | z2 mm |
|----------|-------|-------|-------|-------|-------|-------|-------|
| 71300FD0 | 32/20 | 32 | 20 | 40 | 36 | 10 | 10 |