


KELOX

KMW410 KELOX-ULTRAX-W coupling 32/25

71300FE0

Areas of application

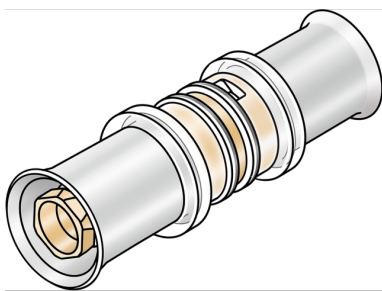

?Zeta value-optimised press-fit coupling, equal or reduced, made from dezincification-resistant (DZR) brass, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing

Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

Specifications

Article information

port 1	Pressmuffe
port 2	Pressmuffe
execution	1-part
design	gerade
press contour	U

Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

Product information

VPE1	5,00 SA1
VPE2	40,00 KT1
VPE3	2400,00 PAL
weight	0,138 KGM
text	KELOX-ULTRAX-W coupling
INTRNR	74122000
main material group	KELOX
code	KMW410



Art. No	label	d1 mm	d2 mm	L1 mm	L2 mm	z1 mm	z2 mm
71300FE0	32/25	32	25	39,5	39,5	9,5	9,5