


KELOX

KMW425 KELOX-ULTRAX-W elbow 45° 40

71306GG0

Areas of application

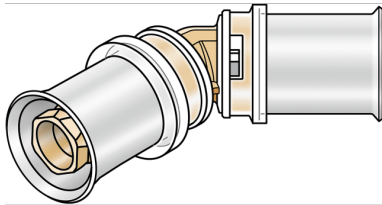

?Zeta value-optimised press-fit elbow 45°, for changing direction with a minimal radius, made from dezincification-resistant (DZR) brass, including support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing

Approvals:



Specifications

Article information


| | |
|---------------|------------|
| port 1 | Pressmuffe |
| port 2 | Pressmuffe |
| design | Winkel |
| angle | 45 ° |
| press contour | U |

Technical properties

| | |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

Product information

| | |
|---------------------|--------------------------|
| VPE1 | 5,00 SA1 |
| VPE2 | 15,00 KT1 |
| VPE3 | 900,00 PAL |
| weight | 0,405 KGM |
| text | KELOX-ULTRAX-W elbow 45° |
| INTRNR | 74122000 |
| main material group | KELOX |
| code | KMW425 |

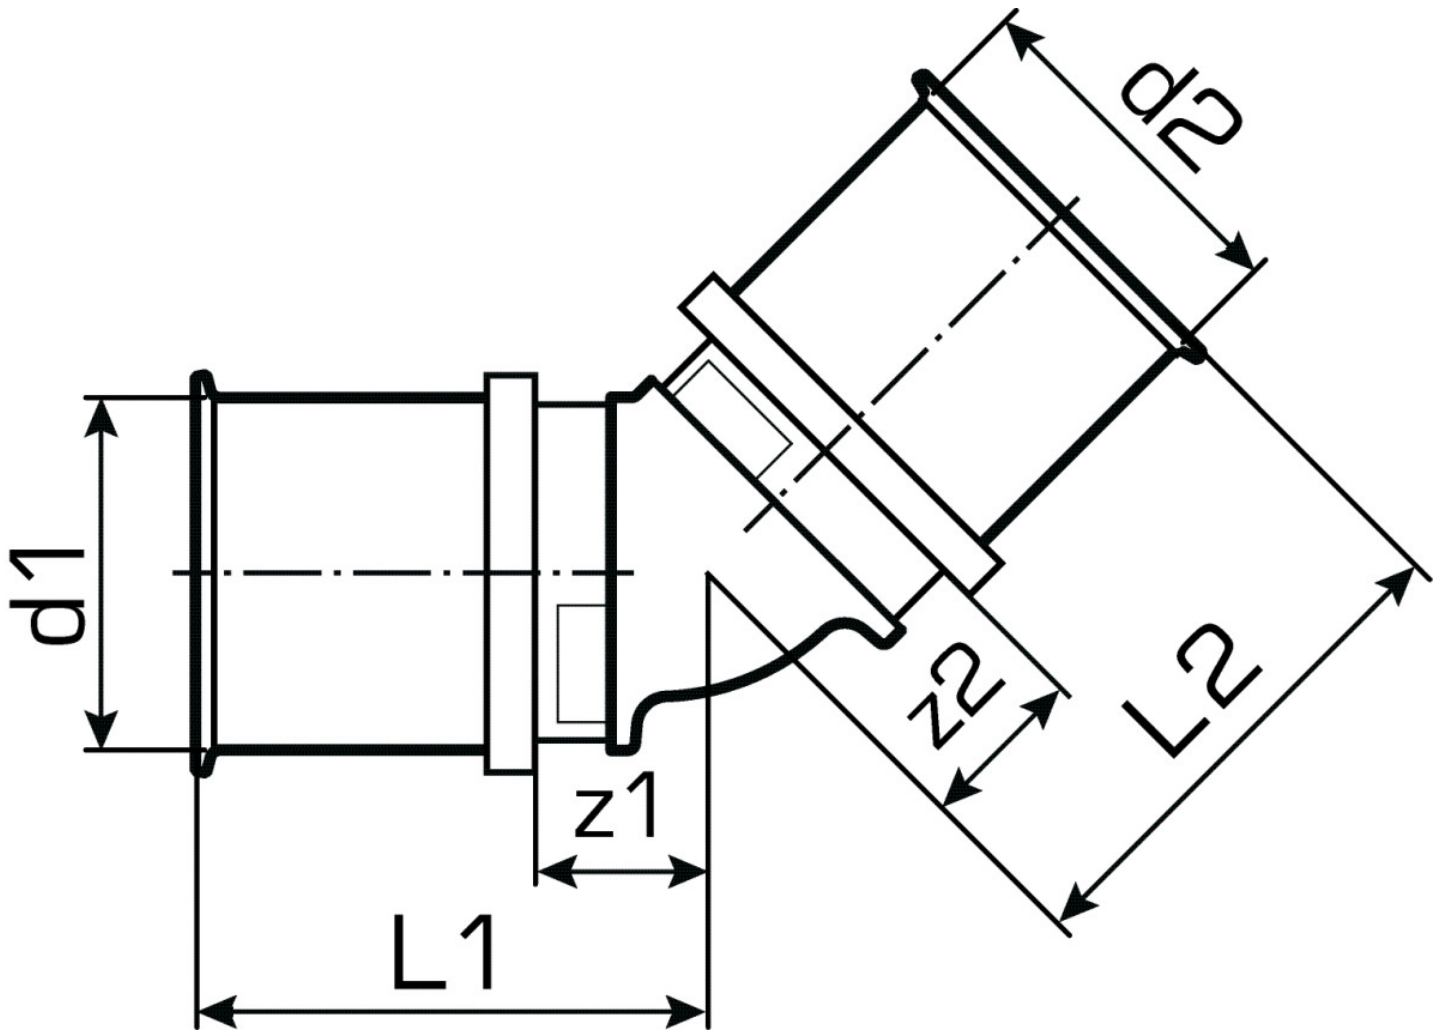

| Art. No | label | d1 mm | d2 mm | L1 mm | L2 mm | z1 mm | z2 mm |
|----------|-------|-------|-------|-------|-------|-------|-------|
| 71306GG0 | 40 | 40 | 40 | 60 | 60 | 19 | 19 |