


# KELOX

## KMW455 KELOX-ULTRAX-W screw fitting with female thread 20x3/4"

71403D04

### Areas of application

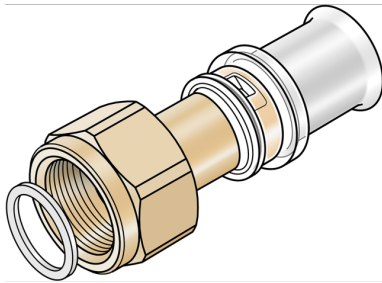

?Zeta value-optimised press-fit screw fitting with female thread, for connecting to fittings, e.g. filters manifolds, pumps, etc., made of dezincification resistant brass (DZR); incl. support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing, flat-sealing including seal

## Approvals:



# Specifications

## Article information


port 1	Pressmuffe
port 2	Überwurfmutter
design	gerade
press contour	U

## Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

## Product information

VPE1	10,00 SA1
VPE2	80,00 KT1
VPE3	4800,00 PAL
weight	0,113 KGM
text	KELOX-ULTRAX-W screw fitting with female thread
INTRNR	74122000
main material group	KELOX
code	KMW455

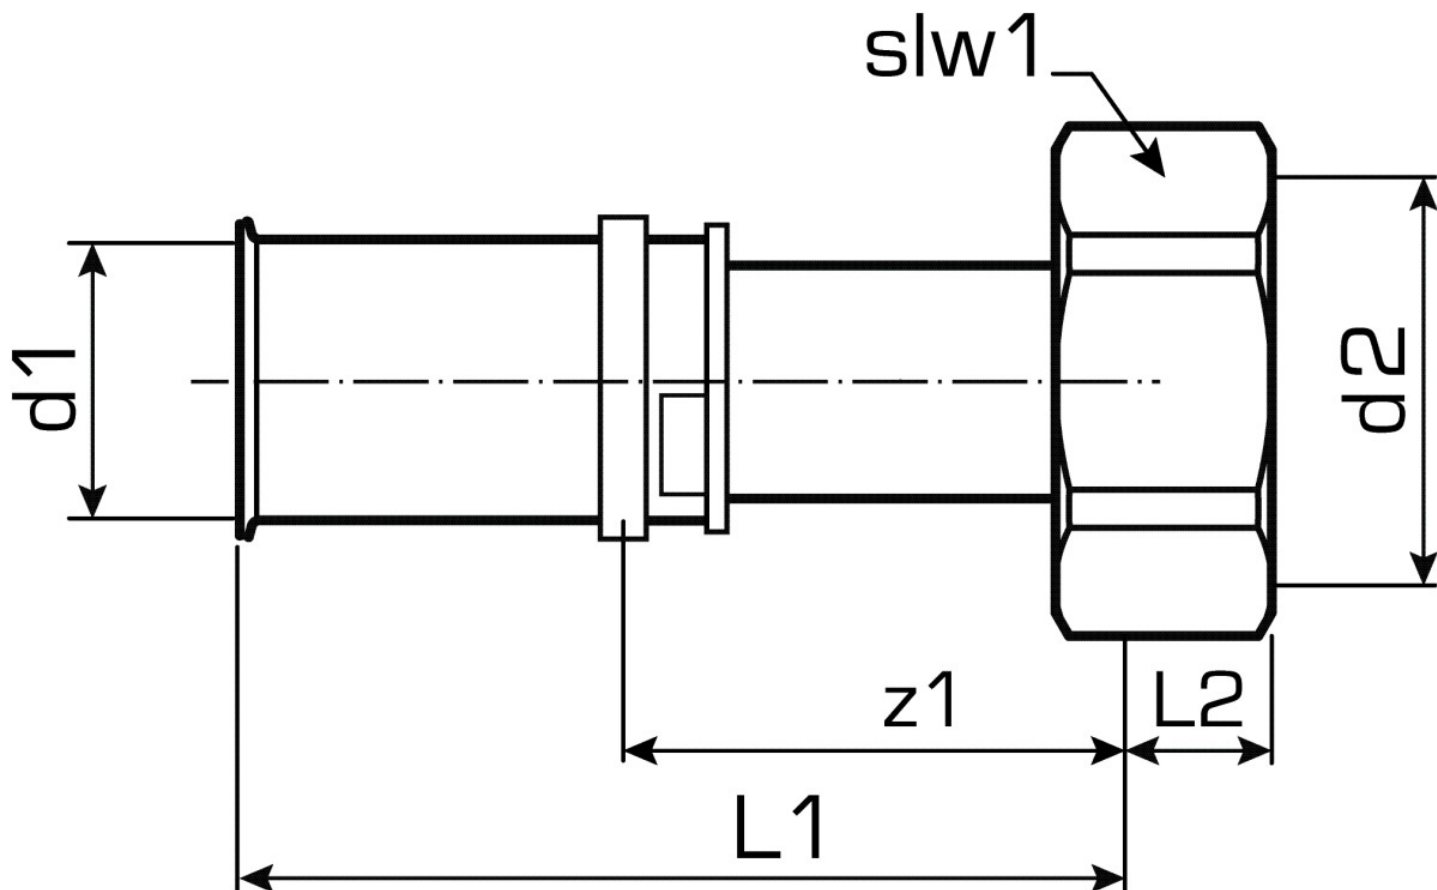

Art. No	label	d2	d1 mm	L1 mm	z2 mm	slw2 mm
71403D04	20x3/4"	3/4 Zoll (20)	20	26	27	34