


# KELOX

## KMW455 KELOX-ULTRAX-W screw fitting with female thread 25x3/4"

71403E04

### Areas of application

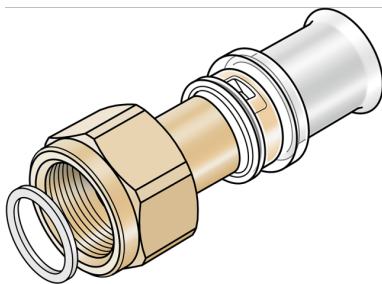

?Zeta value-optimised press-fit screw fitting with female thread, for connecting to fittings, e.g. filters manifolds, pumps, etc., made of dezincification resistant brass (DZR); incl. support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing, flat-sealing including seal

## Approvals:



# Specifications

## Article information


|               |                |
|---------------|----------------|
| port 1        | Pressmuffe     |
| port 2        | Überwurfmutter |
| design        | gerade         |
| press contour | U              |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |   |
|---------------------|---|
| VPE1                | 5,00 SA1  |
| VPE2                | 40,00 KT1                                       |
| VPE3                | 2400,00 PAL                                     |
| weight              | 0,148 KGM                                       |
| text                | KELOX-ULTRAX-W screw fitting with female thread |
| INTRNR              | 74122000  |
| main material group | KELOX   |
| code                | KMW455  |

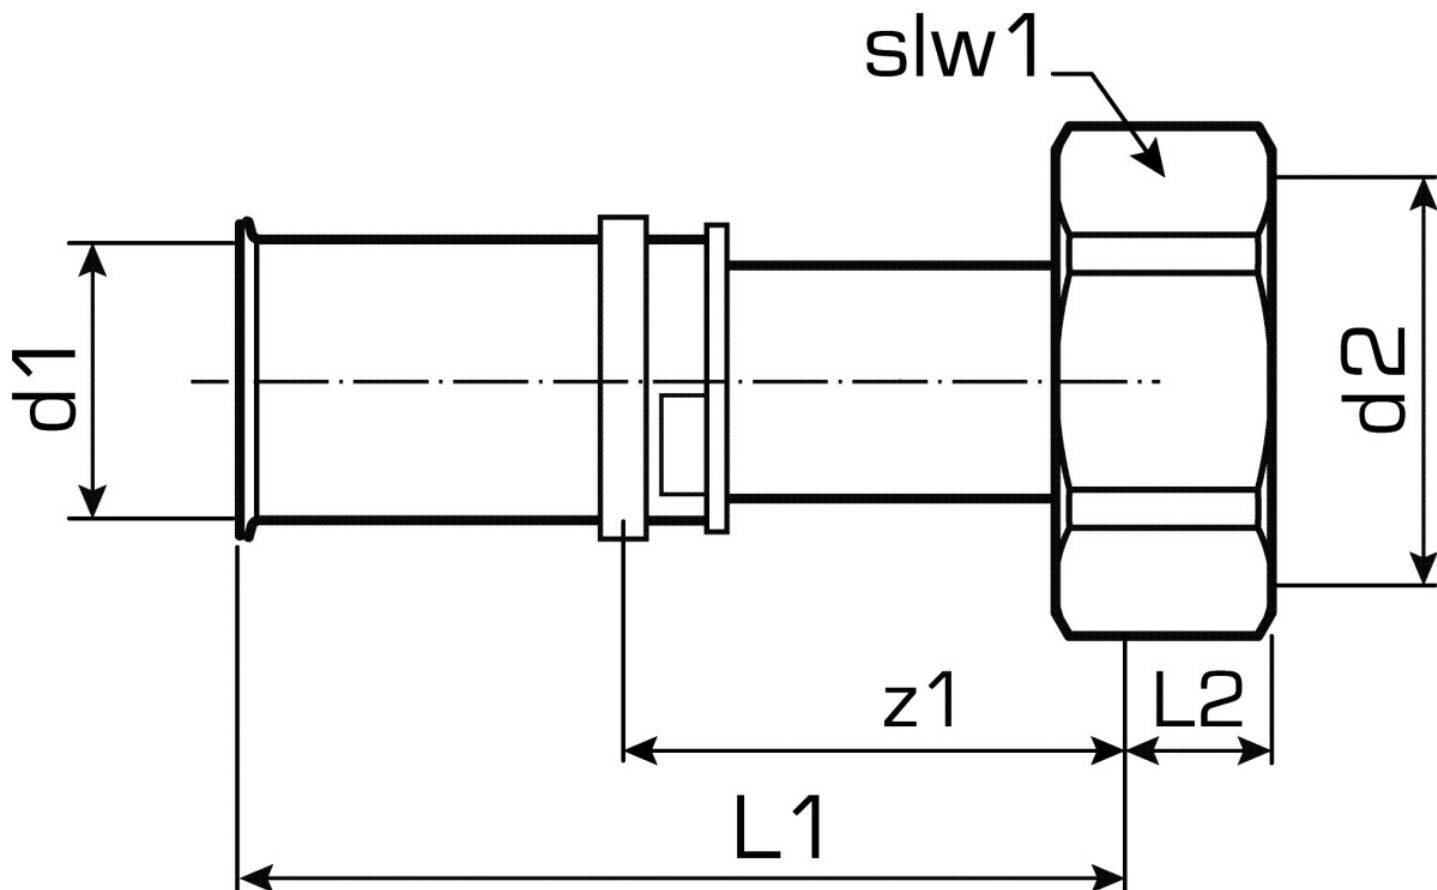

| Art. No  | label   | d2               | d1 mm | L1 mm | L2 mm | z1 mm | z2 mm | slw1 mm | slw2 mm |
|----------|---------|------------------|-------|-------|-------|-------|-------|---------|---------|
| 71403E04 | 25x3/4" | 3/4 Zoll<br>(20) | 25    | 66,5  | 8     | 36,5  | 23,5  | 34      | 42      |