


KELOX

KMW455 KELOX-ULTRAX-W screw fitting with female thread 40x6/4"

71403G07

Areas of application

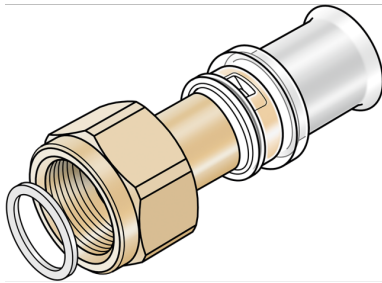

?Zeta value-optimised press-fit screw fitting with female thread, for connecting to fittings, e.g. filters manifolds, pumps, etc., made of dezincification resistant brass (DZR); incl. support sleeves with O-rings and stainless steel press-fit sleeves "leak before pressed", audible leakage signal at air-pressure testing, flat-sealing including seal

Approvals:



Specifications

Article information


port 1	Pressmuffe
port 2	Überwurfmutter
design	straight
press contour	U

Technical properties

maximum working pressure at 20 ° C	16 bar
------------------------------------	--------

Product information

VPE1	5,00 SA1
VPE2	20,00 KT1
weight	0,250 KGM
text	KELOX-ULTRAX-W screw fitting with female thread
INTRNR	74122000
main material group	KELOX
code	KMW455

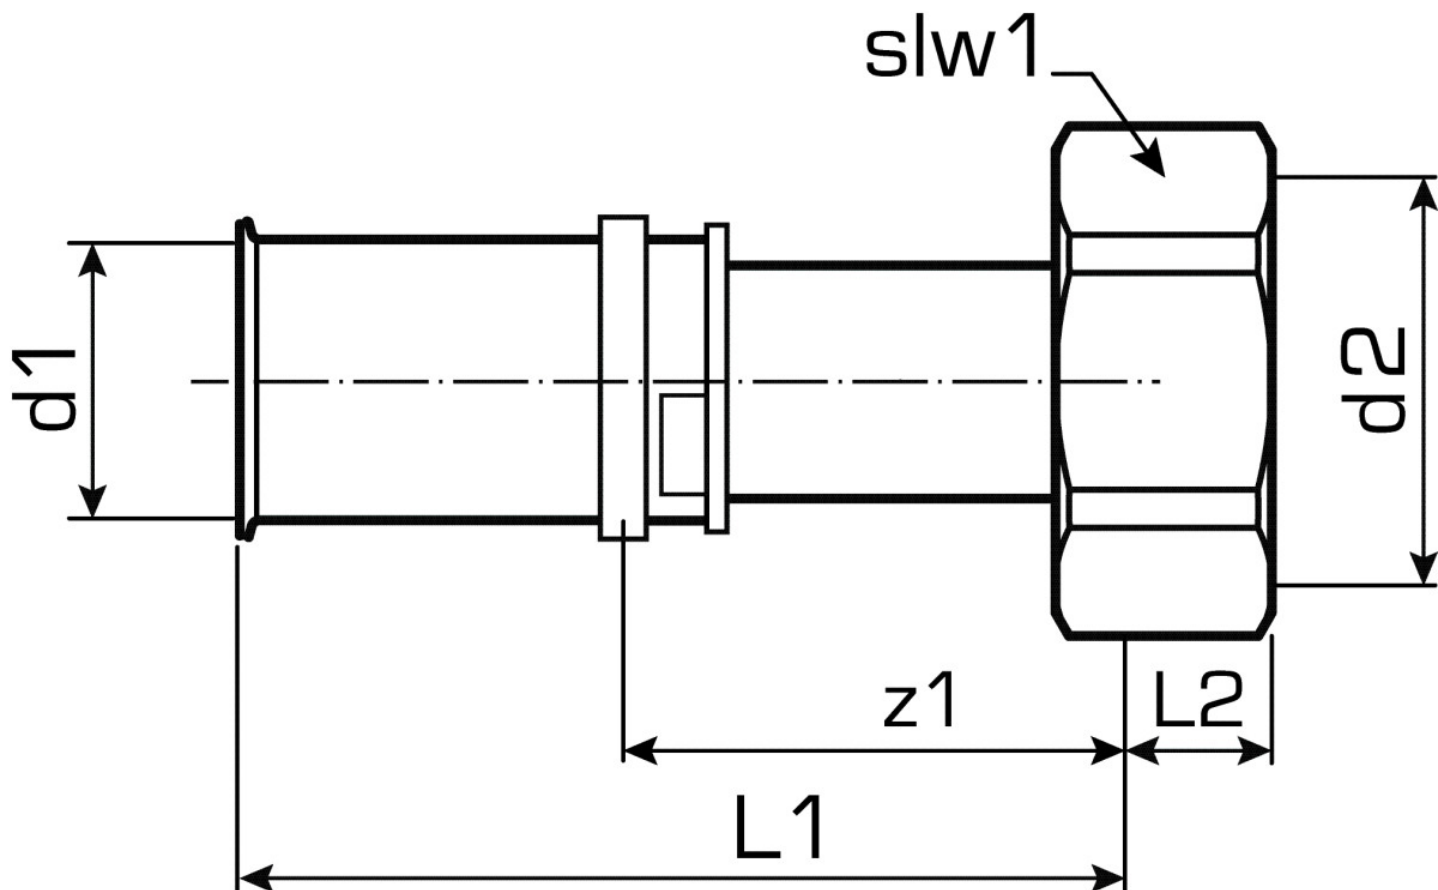

Art. No	label	d2	d1 mm	L1 mm	L2 mm	z1 mm	slw2 mm
71403G07	40x6/4"	1 1/2 Zoll (40)	40	58,5	14,5	18,5	55