


# STEELOX

## SMX100 STEELOX multilayer composite pipe 25x2.5

57001E00

### Areas of application

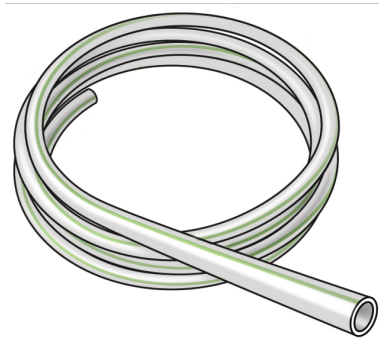

STEELOX pipe conforming to ÖNORM B 5175, oxygen- and steam diffusion-tight multi-layer composite pipe made of stainless steel/PE-RT

Classification of operating conditions as per ÖNORM B 5175 - Class 2:

70°C/10 bar, max. operating temperature up to 80°C - accident temperature 100°C (max. 100h)

Colour: silver with green longitudinal stripes

Supplied in coils

## Approvals:



# Specifications

## Article information

<b>color</b>	Silver with green longitudinal stripes
<b>flexible</b>	Yes
<b>trade length</b>	50 m
<b>isolation</b>	No

## Technical properties

<b>maximum working pressure at 20 ° C</b>	10 bar
<b>pipe weight</b>	0,22 kg/m
<b>pipe contents</b>	0,314 l/m
<b>lambda pipe</b>	0,45 W/(m.K)
<b>wall rawness</b>	0,01 mm
<b>expansion coefficient</b>	0,045 mm/(m.K)

## Product information

<b>VPE1</b>	50,00 ROL
<b>VPE2</b>	700,00 PAL
<b>L</b>	50 m
<b>weight</b>	0,230 KGM
<b>text</b>	STEELOX multilayer composite pipe
<b>INTRNR</b>	39173900
<b>code</b>	SMX100



Art. No	label	d1 mm	pipe contents l/m	s mm
57001E00	25x2.5	25	0,314	2,5



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)