


# STEEL FIX C-STAHl

CP411 C-steel press-reduction socket  
male/female 67/54

54601IH0

## Areas of application

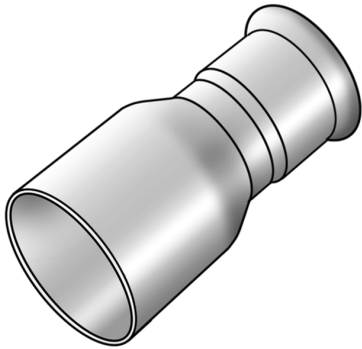

Press-reduction socket f/m straight made of C-steel coated with a zinc layer, incl. EPDM sealing components, d15-54 "leak before pressed"

Press contour: M

# Specifications

## Article information


|               |                 |
|---------------|-----------------|
| port 1        | Pressmuffe      |
| port 2        | Zapfen/Rohrende |
| execution     | 1-teilig        |
| design        | gerade          |
| press contour | M               |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                                            |
|---------------------|--------------------------------------------|
| VPE1                | 4 SA1                                      |
| VPE2                | 8 KT1                                      |
| weight              | 0,29 KGM                                   |
| text                | C-steel press-reduction socket male/female |
| INTRNR              | 73079980                                   |
| main material group | STEELFIX                                   |
| material group      | C-STAHl pressfittings                      |
| code                | CP411                                      |

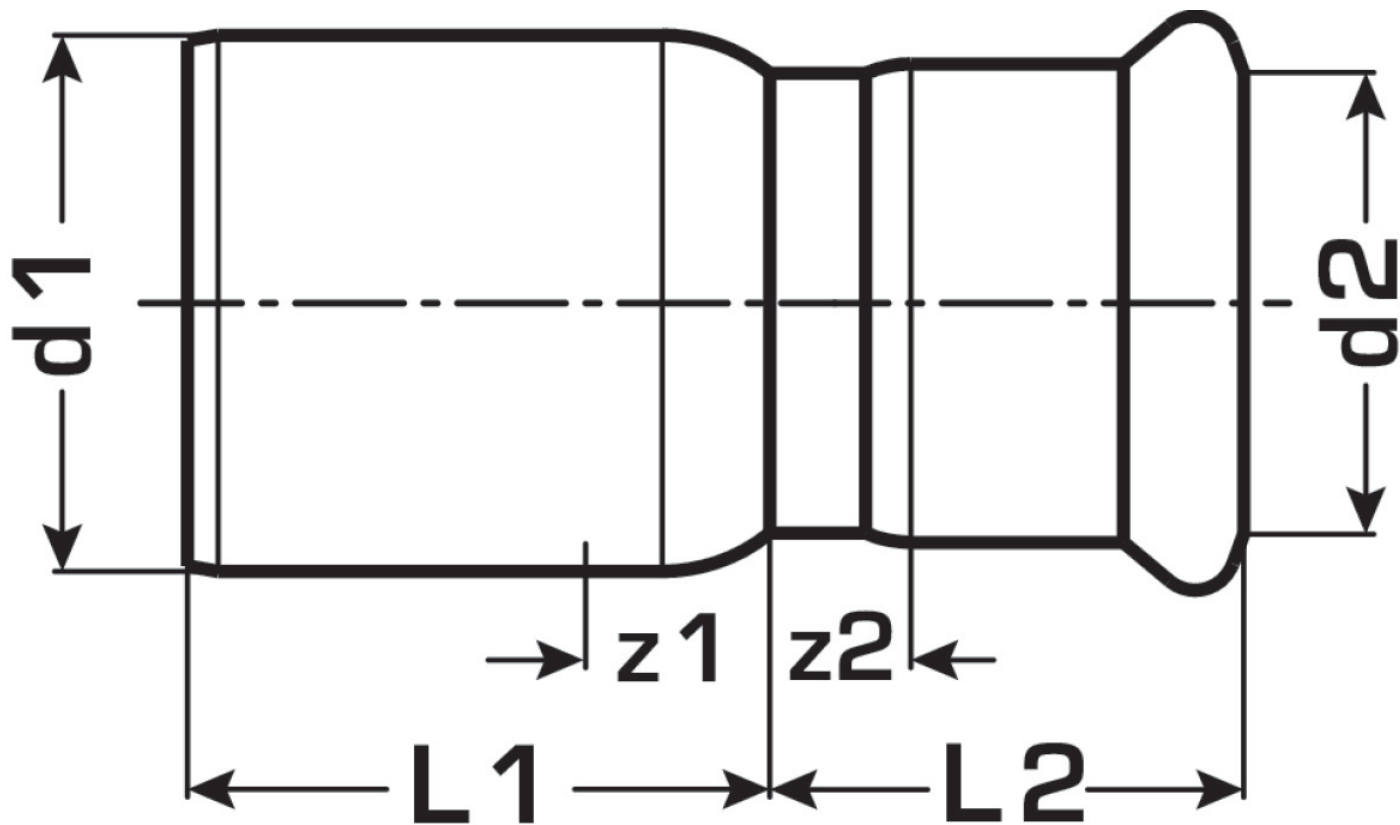

| Art. No  | label | d1 mm | d2 mm | L1 mm | L2 mm | z1 mm | z2 mm |
|----------|-------|-------|-------|-------|-------|-------|-------|
| 54601IH0 | 67/54 | 66.7  | 54    | 48    | 72    | 13    | 22    |