


# STEEL FIX C-STAHl

CP415 STEELFIX carbon steel press-fit repair coupling 66,7

54605II0

## Areas of application

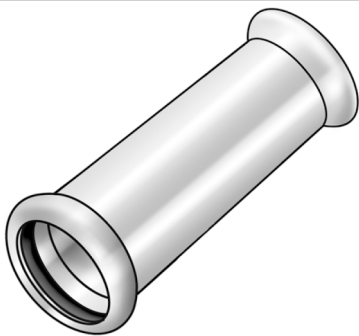

Press-fit repair coupling straight made of carbon steel coated with a zinc layer, incl. EPDM sealing elements, d15-54 "leak before pressed"

Press contour: M

# Specifications

## Article information


port 1	Pressmuffe
port 2	Pressmuffe
execution	1-part
design	gerade
press contour	M

## Technical properties

insertion depth 1 (es1)	47 mm
maximum working pressure at 20 ° C	16 bar

## Product information

VPE1	2,00 SA1
VPE2	4,00 KT1
weight	0,683 KGM
text	STEELFIX carbon steel press-fit repair coupling
INTRNR	73079980
main material group	STEELFIX
material group	C-STAHl pressfittings
code	CP415

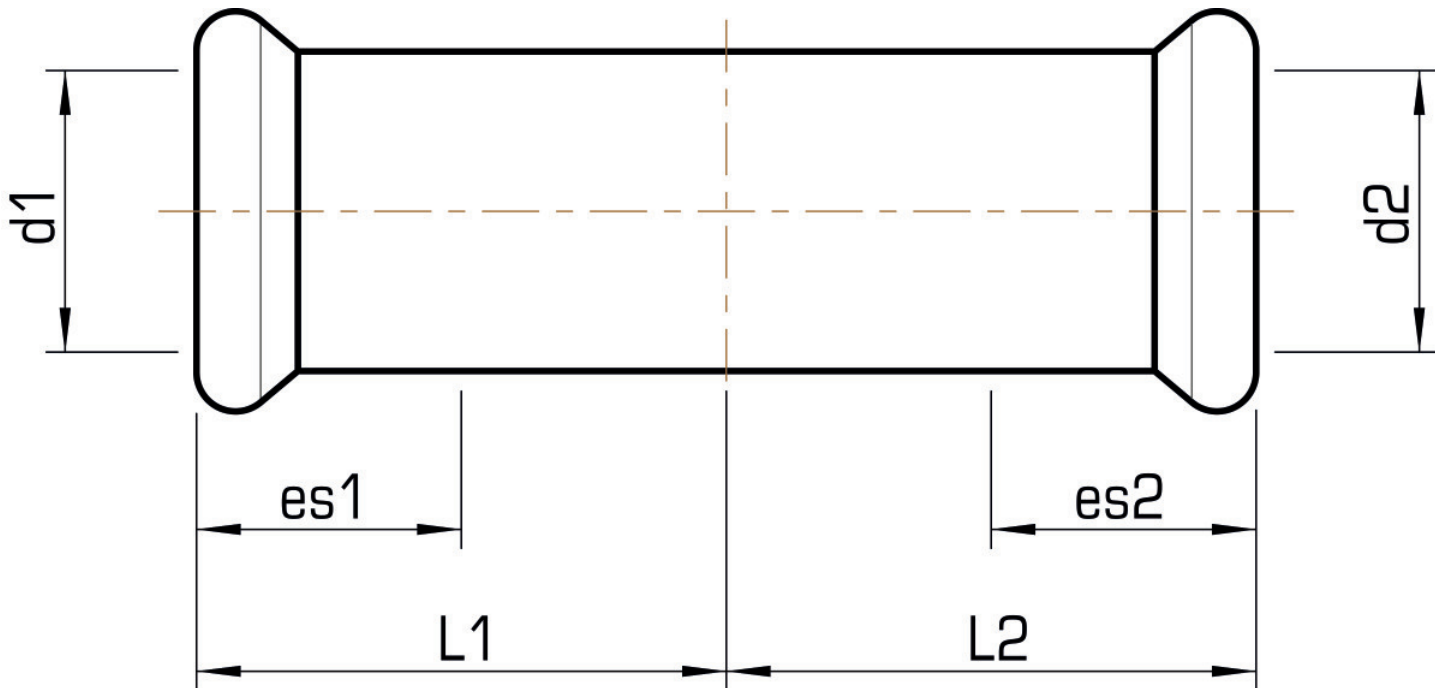

Art. No	label	d1 mm	d2 mm	L1 mm	L2 mm	insertion depth 1 (es1) mm	Insertion depth 2 (es2) mm
54605110	66,7	66,7	66,7	99	99	47	47