


# STEEL FIX C-STAHL

CP450 C-Steel press-adaptor male 35x5/4"

54702F06

## Areas of application

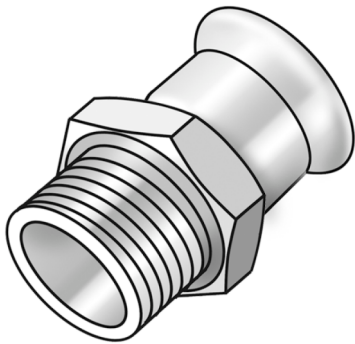

Press-adaptor with male thread conforming to EN 10226-1 made of C-steel coated with a zinc layer, incl. EPDM sealing components, d15-54 "leak before pressed"

Press contour:M

# Specifications

## Article information

|               |                            |
|---------------|----------------------------|
| port 1        | Pressmuffe                 |
| port 2        | Außengewinde konisch (NPT) |
| execution     | 1-teilig                   |
| design        | gerade                     |
| press contour | M                          |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                            |
|---------------------|----------------------------|
| VPE1                | 5 SA1                      |
| VPE2                | 40 KT1                     |
| VPE3                | 1000 DDP                   |
| weight              | 0,19 KGM                   |
| text                | C-Steel press-adaptor male |
| INTRNR              | 73079980                   |
| main material group | STEELFIX                   |
| material group      | C-STAHL pressfittings      |
| code                | CP450                      |



| Art. No  | label   | d2                 | d1 mm | L1 mm | L2 mm | z1 mm | slw2 mm |
|----------|---------|--------------------|-------|-------|-------|-------|---------|
| 54702F06 | 35x5/4" | 1 1/4 Zoll<br>(32) | 35    | 33    | 22    | 7     | 53      |