


# COPPER FIX

COF440 COPPERFIX copper press-tee 28/22/22

52630EDD

## Areas of application

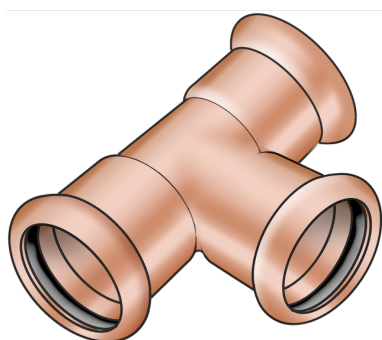

Press-tee equal or reduced made of copper, incl. EPDM sealing components, "leak before pressed"

Press contour: M

## Approvals:



# Specifications

## Article information

|               |            |
|---------------|------------|
| port 1        | Pressmuffe |
| port 2        | Pressmuffe |
| port 3        | Pressmuffe |
| execution     | T-Stück    |
| angle         | 90 °       |
| press contour | M          |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                            |
|---------------------|----------------------------|
| VPE1                | 5,00 SA1                   |
| VPE2                | 25,00 KT1                  |
| weight              | 0,122 KGM                  |
| text                | COPPERFIX copper press-tee |
| INTRNR              | 74122000                   |
| main material group | COPPERFIX                  |
| material group      | KUPFER pressfittings       |
| code                | COF440                     |



| Art. No  | label    | d1 mm | d2 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm |
|----------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 52630EDI | 28/22/22 | 28    | 22    | 22    | 42    | 41    | 49    | 19    | 20    | 28    |