


# KELIT PEX

## PEX00-2 KELIT PEX pipe insulation series 2 63x5.8

3040065

### Areas of application

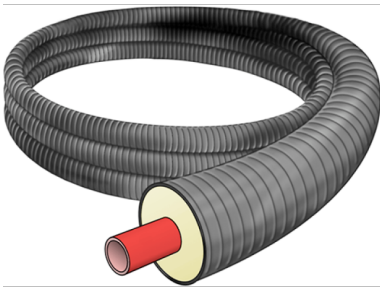

Medium pipe made from cross-linked polyethylene and coloured O<sub>2</sub> diffusion layer, SDR 11. Pipe connection compatible with standard connector

Application area: PN12.5 / 20°C - PN6 / 80°C - t<sub>max</sub> 95°C

Thermal insulation: PUR foam complying with EN 253 / EN 15632, closed-cell, CFC-free

Jacket pipe: corrugated PE-LD pipe, seamlessly extruded, long-term-protected against UV radiation

# Specifications


## Technical properties

|                            |           |
|----------------------------|-----------|
| <b>pipe weight</b>         | 3,10 kg/m |
| <b>pipe contents</b>       | 2,07 l/m  |
| <b>diameter inner tube</b> | 63 mm     |

## Product information

|                            |                                    |
|----------------------------|------------------------------------|
| <b>casing DA</b>           | 142                                |
| <b>VPE1</b>                | 1,00 LFM                           |
| <b>VPE2</b>                | 229,00 ROL                         |
| <b>L</b>                   | 229                                |
| <b>weight</b>              | 3,000 KGM                          |
| <b>text</b>                | KELIT PEX pipe insulation series 2 |
| <b>INTRNR</b>              | 39173900                           |
| <b>main material group</b> | KELIT PEX                          |
| <b>material group</b>      | PEX pipe                           |
| <b>code</b>                | PEX00-2                            |

da

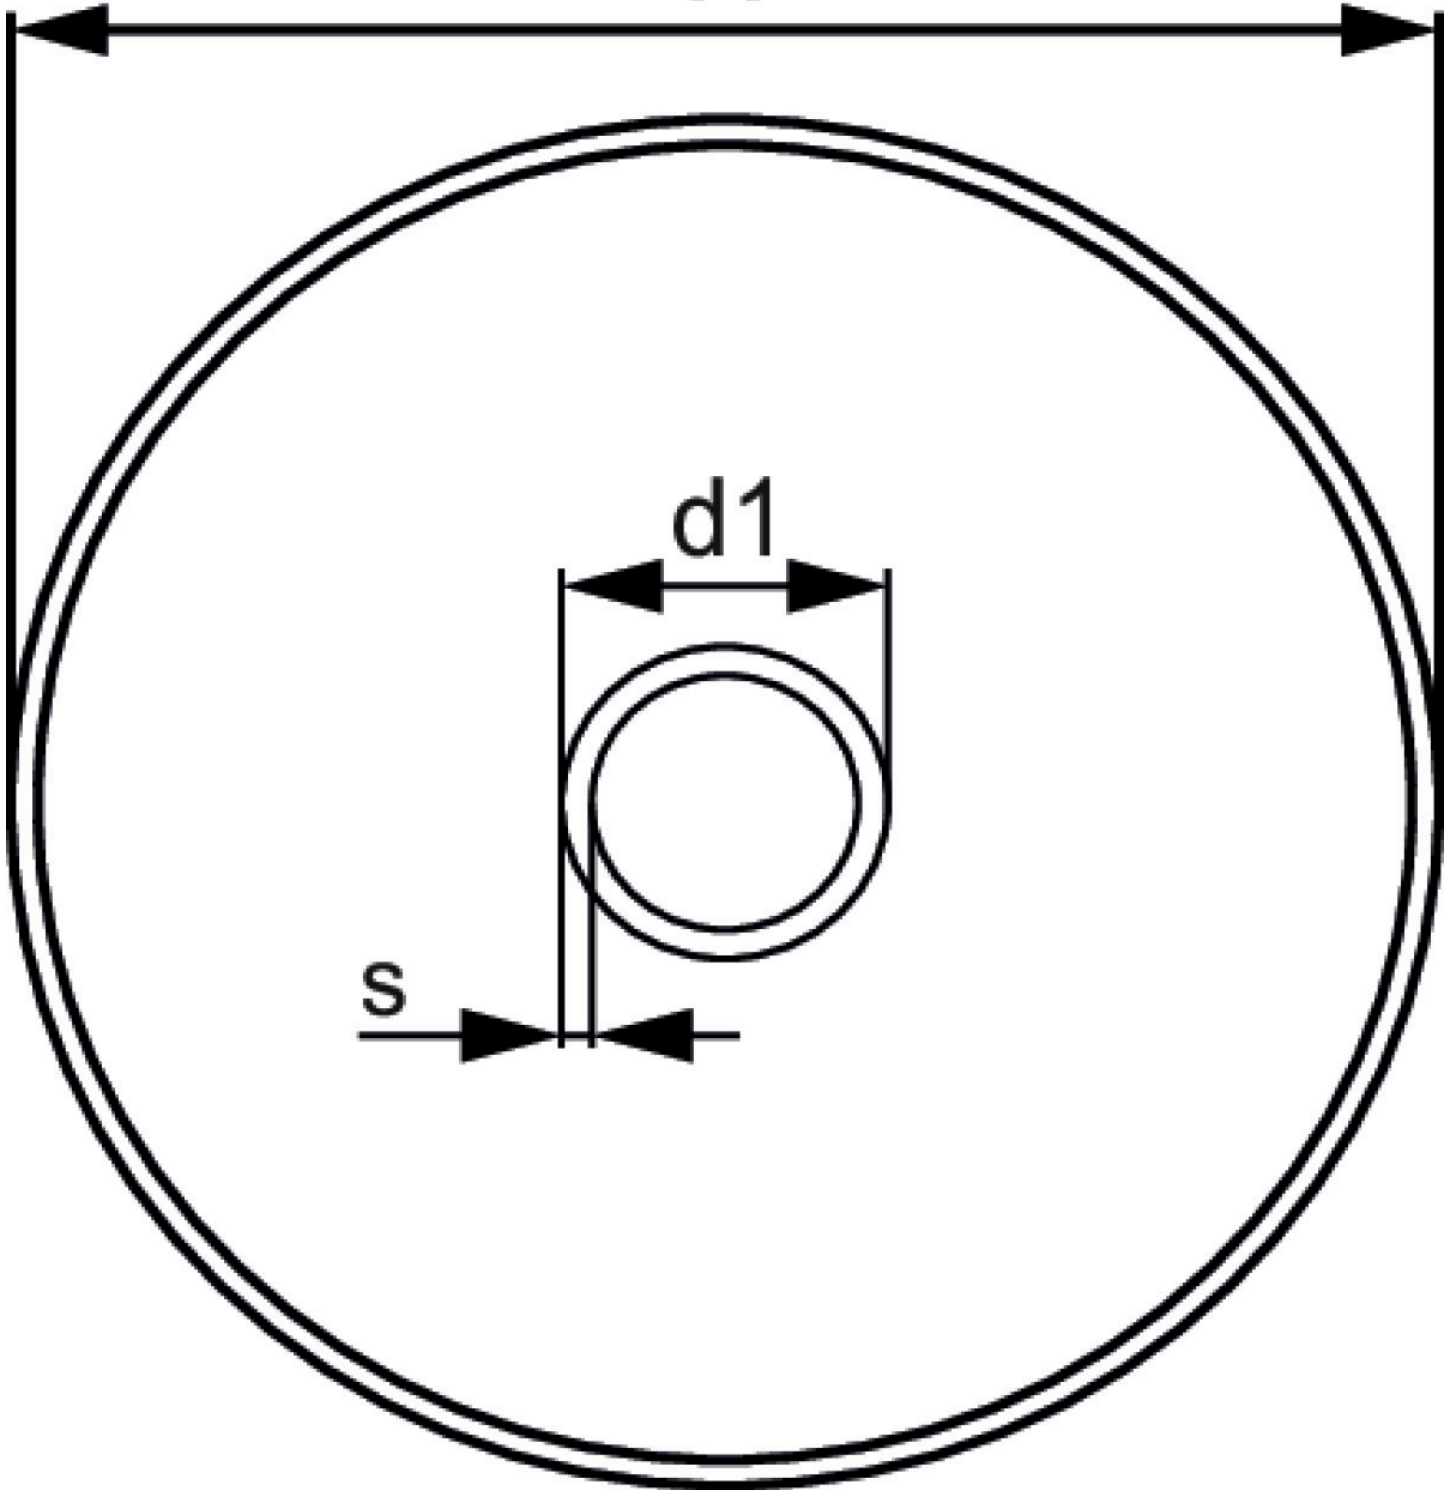

| Art. No | label  | pipe contents l/m |
|---------|--------|-------------------|
| 3040065 | 63x5.8 | 2,07              |



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)