


KELIT PEX

PEX03-1 KELIT DUO-PEX pipe insulation series 1 40+40x3.7

3040230

Areas of application

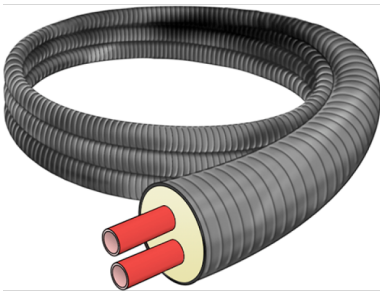

Medium pipe made from cross-linked polyethylene and coloured O₂ diffusion layer, SDR 11. Pipe connection compatible with standard connector

Application area: PN12.5 / 20°C - PN6 / 80°C - t_{max} 95°C

Thermal insulation: PUR foam complying with EN 253 / EN 15632, closed-cell, CFC-free

Jacket pipe: corrugated PE-LD pipe, seamlessly extruded, long-term-protected against UV radiation

Specifications


Technical properties

pipe weight	2,50 kg/m
pipe contents	2x 0,83 l/m
diameter inner tube	40 mm

Product information

casing DA	126
VPE1	1,00 LFM
VPE2	305,00 ROL
L	305 m
weight	2,480 KGM
text	KELIT DUO-PEX pipe insulation series 1
INTRNR	39173900
main material group	KELIT PEX
material group	PEX pipe
code	PEX03-1

da

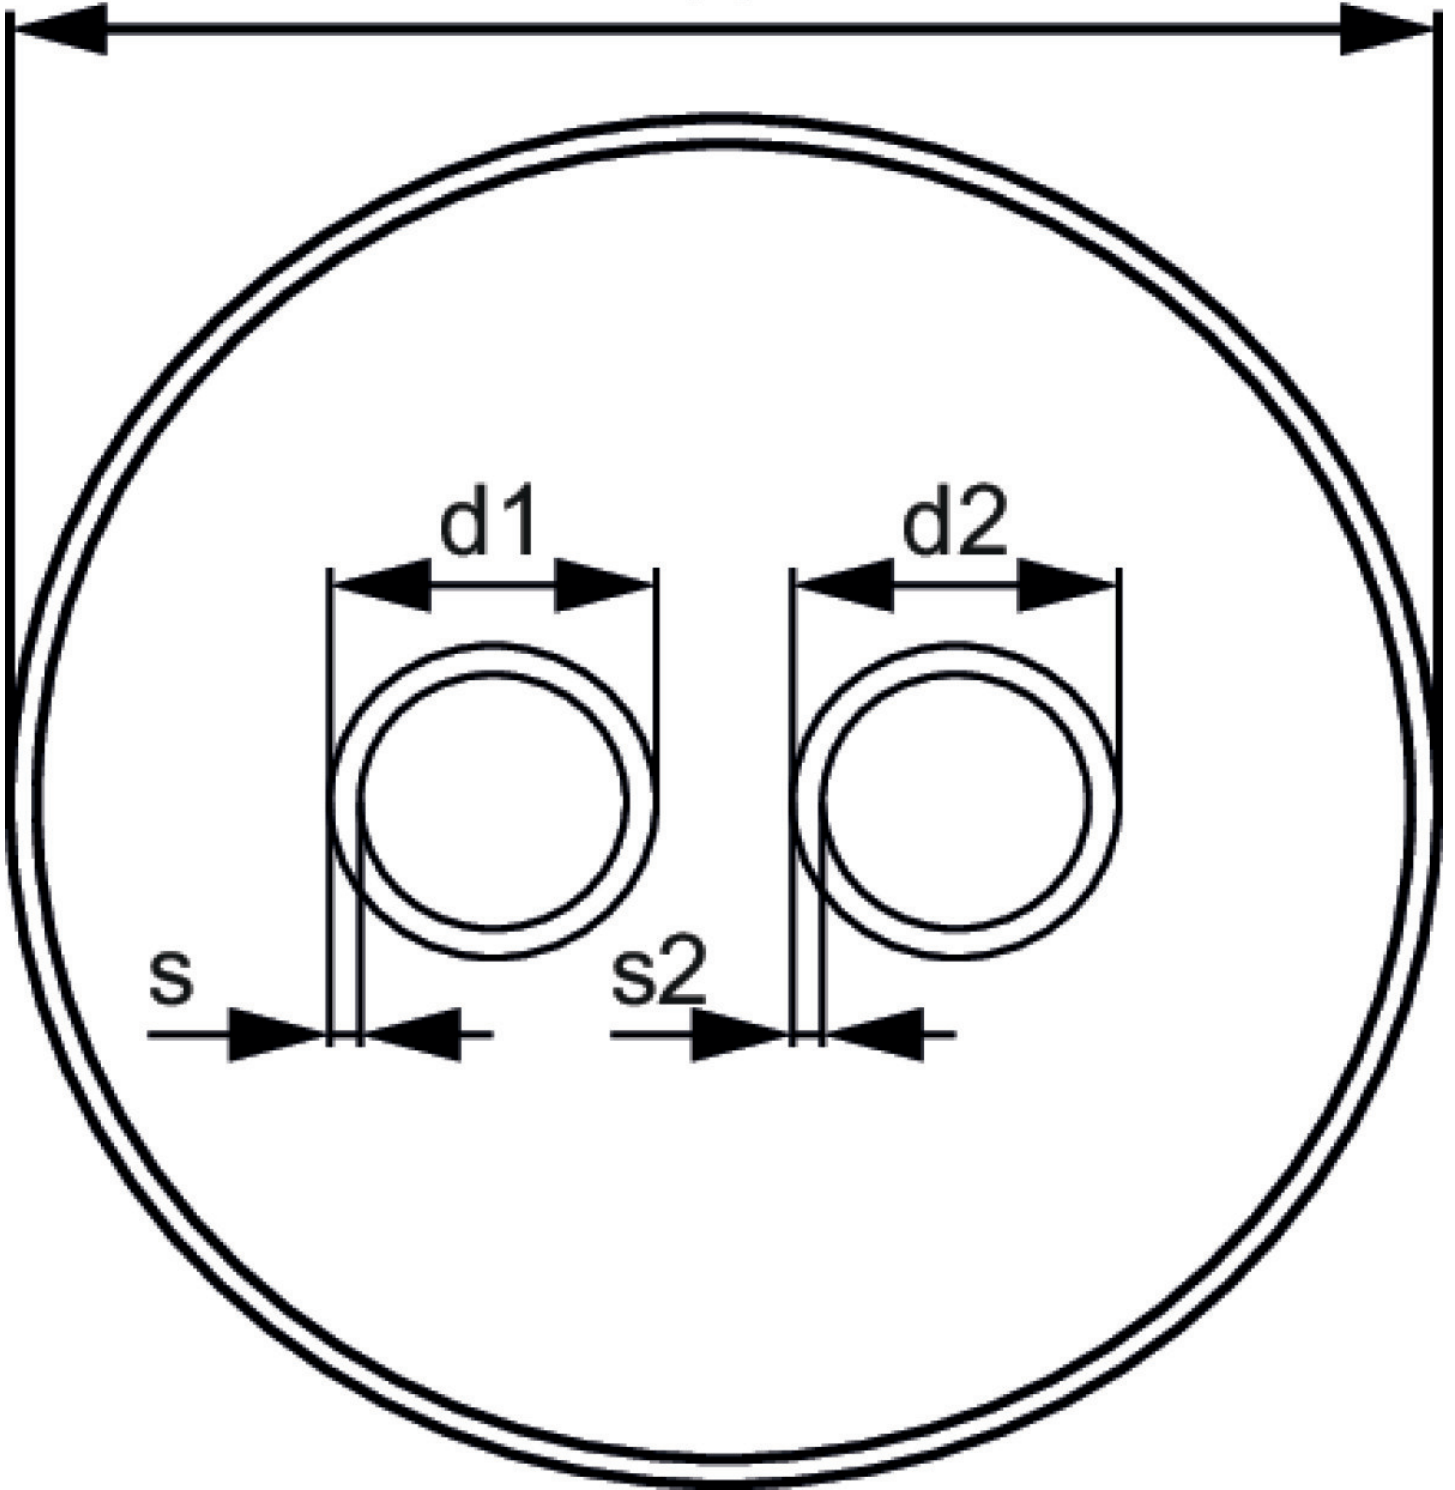

Art. No	label	pipe contents l/m
3040230	40+40x3.7	2x 0,83



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com