


# KELIT PEX

## PEX03-2 KELIT DUO-PEX pipe insulation series 2 40+40x3.7

3040235

### Areas of application

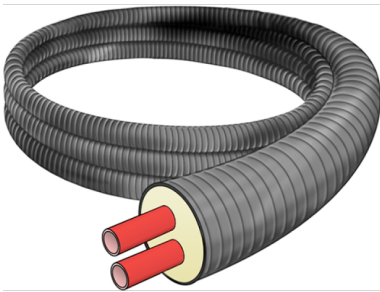

Medium pipe made from cross-linked polyethylene and coloured O<sub>2</sub> diffusion layer, SDR 11. Pipe connection compatible with standard connector

Application area: PN12.5 / 20°C - PN6 / 80°C - t<sub>max</sub> 95°C

Thermal insulation: PUR foam complying with EN 253 / EN 15632, closed-cell, CFC-free

Jacket pipe: corrugated PE-LD pipe, seamlessly extruded, long-term-protected against UV radiation

# Specifications


## Technical properties

pipe weight	3,00 kg/m
pipe contents	2x 0,83 l/m
diameter inner tube	40 mm

## Product information

casing DA	142
VPE1	1,00 LFM
VPE2	229,00 ROL
L	229
weight	2,850 KGM
text	KELIT DUO-PEX pipe insulation series 2
INTRNR	39173900
main material group	KELIT PEX
material group	PEX pipe
code	PEX03-2

da

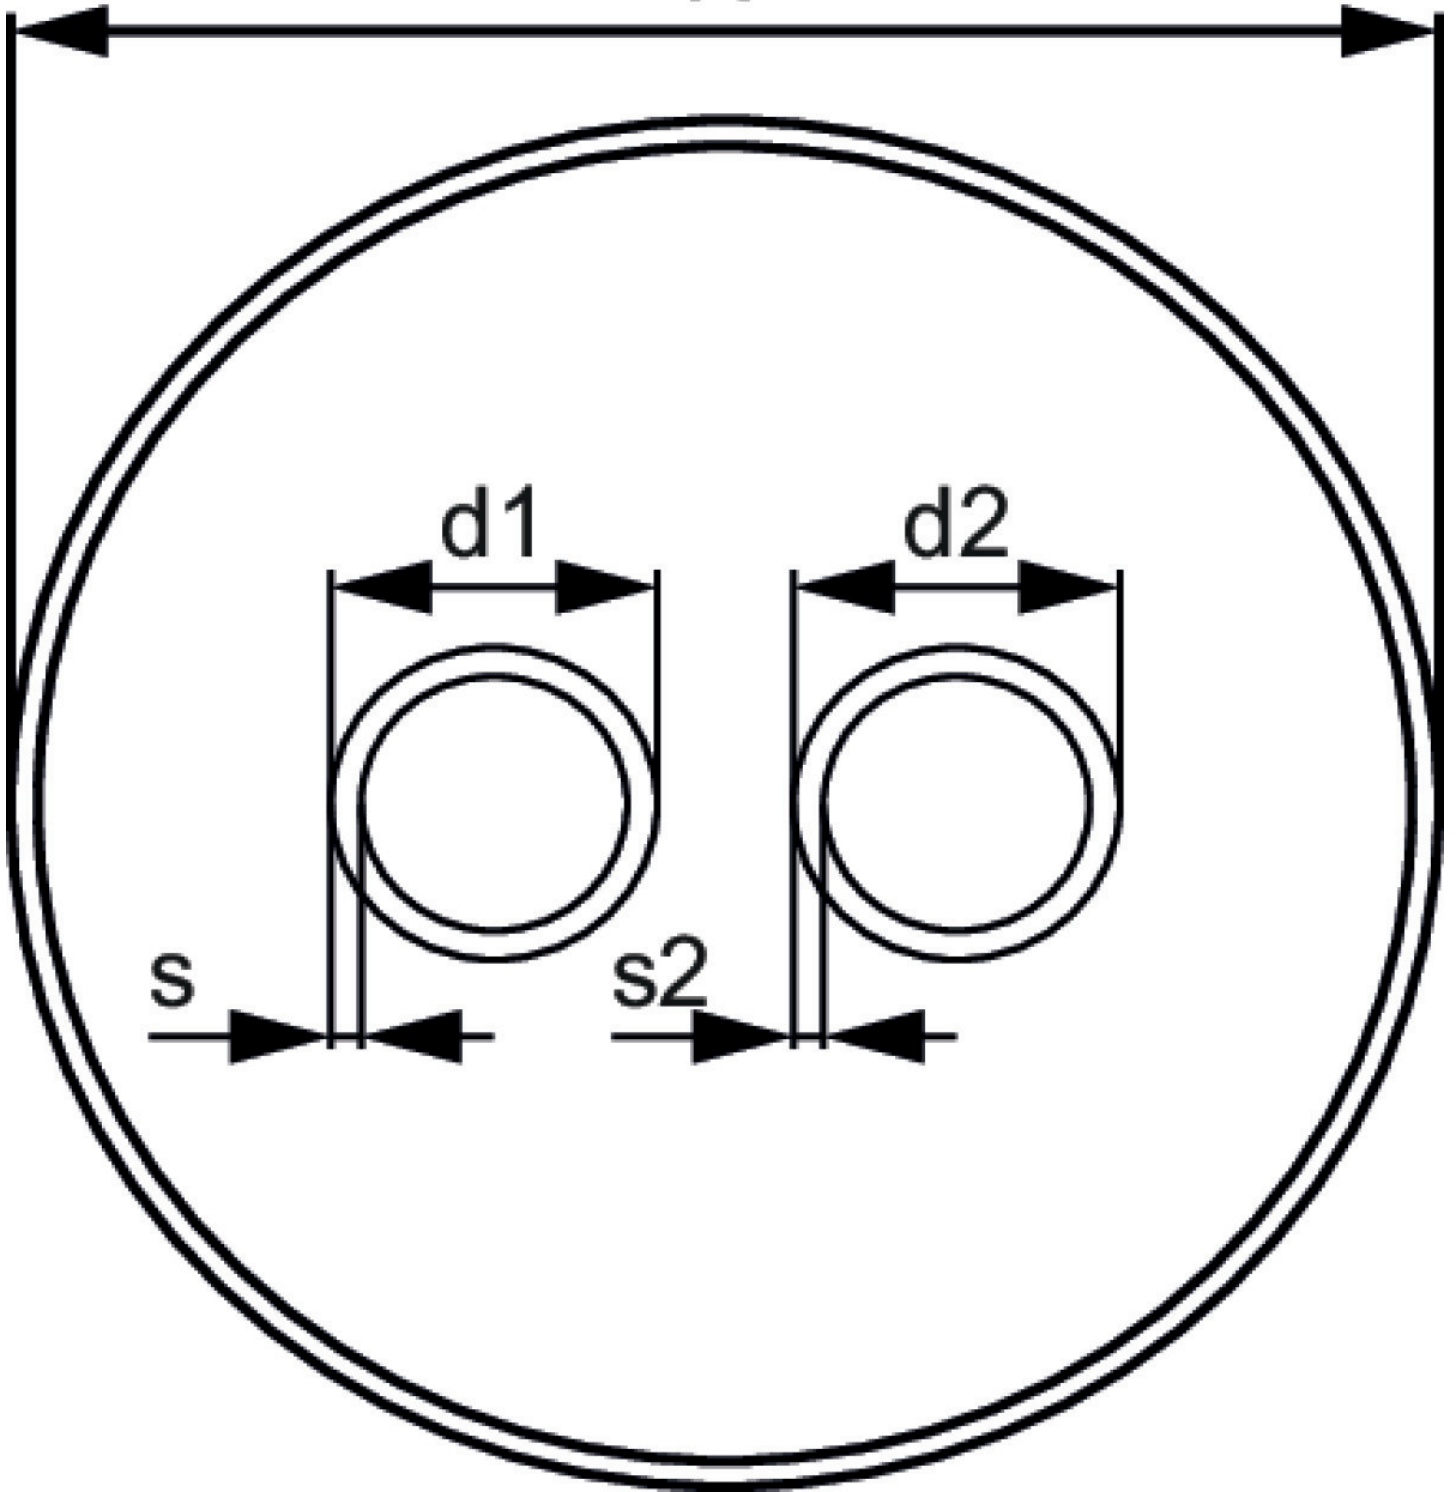

Art. No	label	pipe contents l/m
3040235	40+40x3.7	2x 0,83



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)