


# KELIT PEX

## PEX03-2 KELIT DUO-PEX pipe insulation series 2 63+63x5.8

3040270

### Areas of application

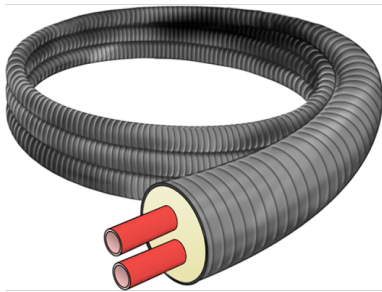

Medium pipe made from cross-linked polyethylene and coloured O<sub>2</sub> diffusion layer, SDR 11. Pipe connection compatible with standard connector

Application area: PN12.5 / 20°C - PN6 / 80°C - t<sub>max</sub> 95°C

Thermal insulation: PUR foam complying with EN 253 / EN 15632, closed-cell, CFC-free

Jacket pipe: corrugated PE-LD pipe, seamlessly extruded, long-term-protected against UV radiation

# Specifications


## Technical properties

<b>pipe weight</b>	6,00 kg/m
<b>pipe contents</b>	2x 2,07 l/m
<b>diameter inner tube</b>	63 mm

## Product information

<b>casing DA</b>	202
<b>VPE1</b>	1,00 LFM
<b>VPE2</b>	80,00 ROL
<b>L</b>	80
<b>weight</b>	5,440 KGM
<b>text</b>	KELIT DUO-PEX pipe insulation series 2
<b>INTRNR</b>	39173900
<b>main material group</b>	KELIT PEX
<b>material group</b>	PEX pipe
<b>code</b>	PEX03-2

da

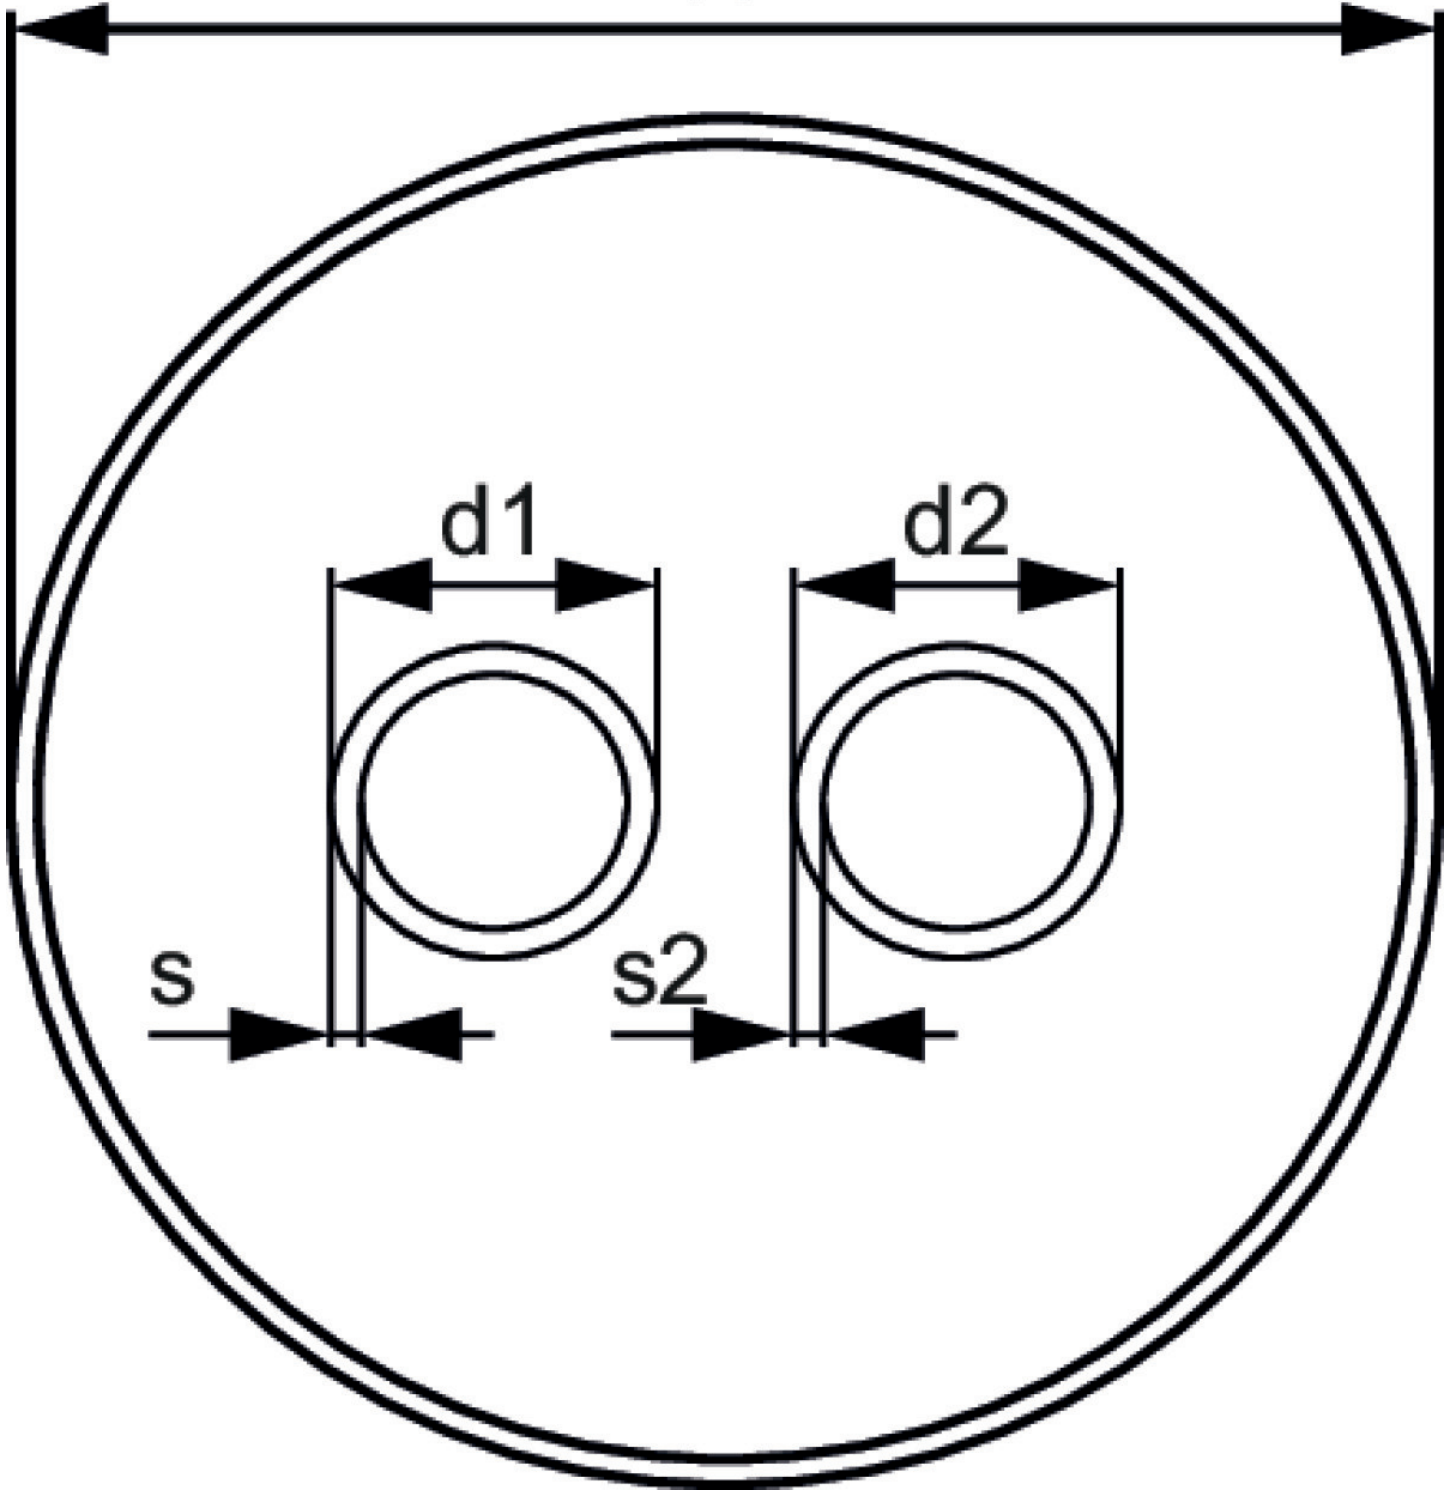

Art. No	label	pipe contents l/m
3040270	63+63x5.8	2x 2,07



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)