

# KELIT PEX

## PEX05 KELIT PEX pipe SANITARY 25x3.5

3041016

### Areas of application



Medium pipe: made from cross-linked polyethylene, SDR 7.4

Area of application: PN16 / 20°C - PN10 / 80°C - tmax 95°C

Thermal insulation: PUR foam complying with EN 15632, flexible, closed-cell, CFC-free

Jacket pipe: corrugated PE-LD pipe, seamlessly extruded, long-term-protected against UV radiation

# Specifications


## Technical properties

<b>pipe weight</b>	1,00 kg/m
<b>pipe contents</b>	0,25 l/m
<b>diameter inner tube</b>	25 mm

## Product information

<b>casing DA</b>	76
<b>VPE1</b>	1,00 LFM
<b>VPE2</b>	807,00 ROL
<b>L</b>	807
<b>weight</b>	1,000 KGM
<b>text</b>	KELIT PEX pipe SANITARY
<b>INTRNR</b>	39173900
<b>main material group</b>	KELIT PEX
<b>material group</b>	PEX sanitary-pipe
<b>code</b>	PEX05

da

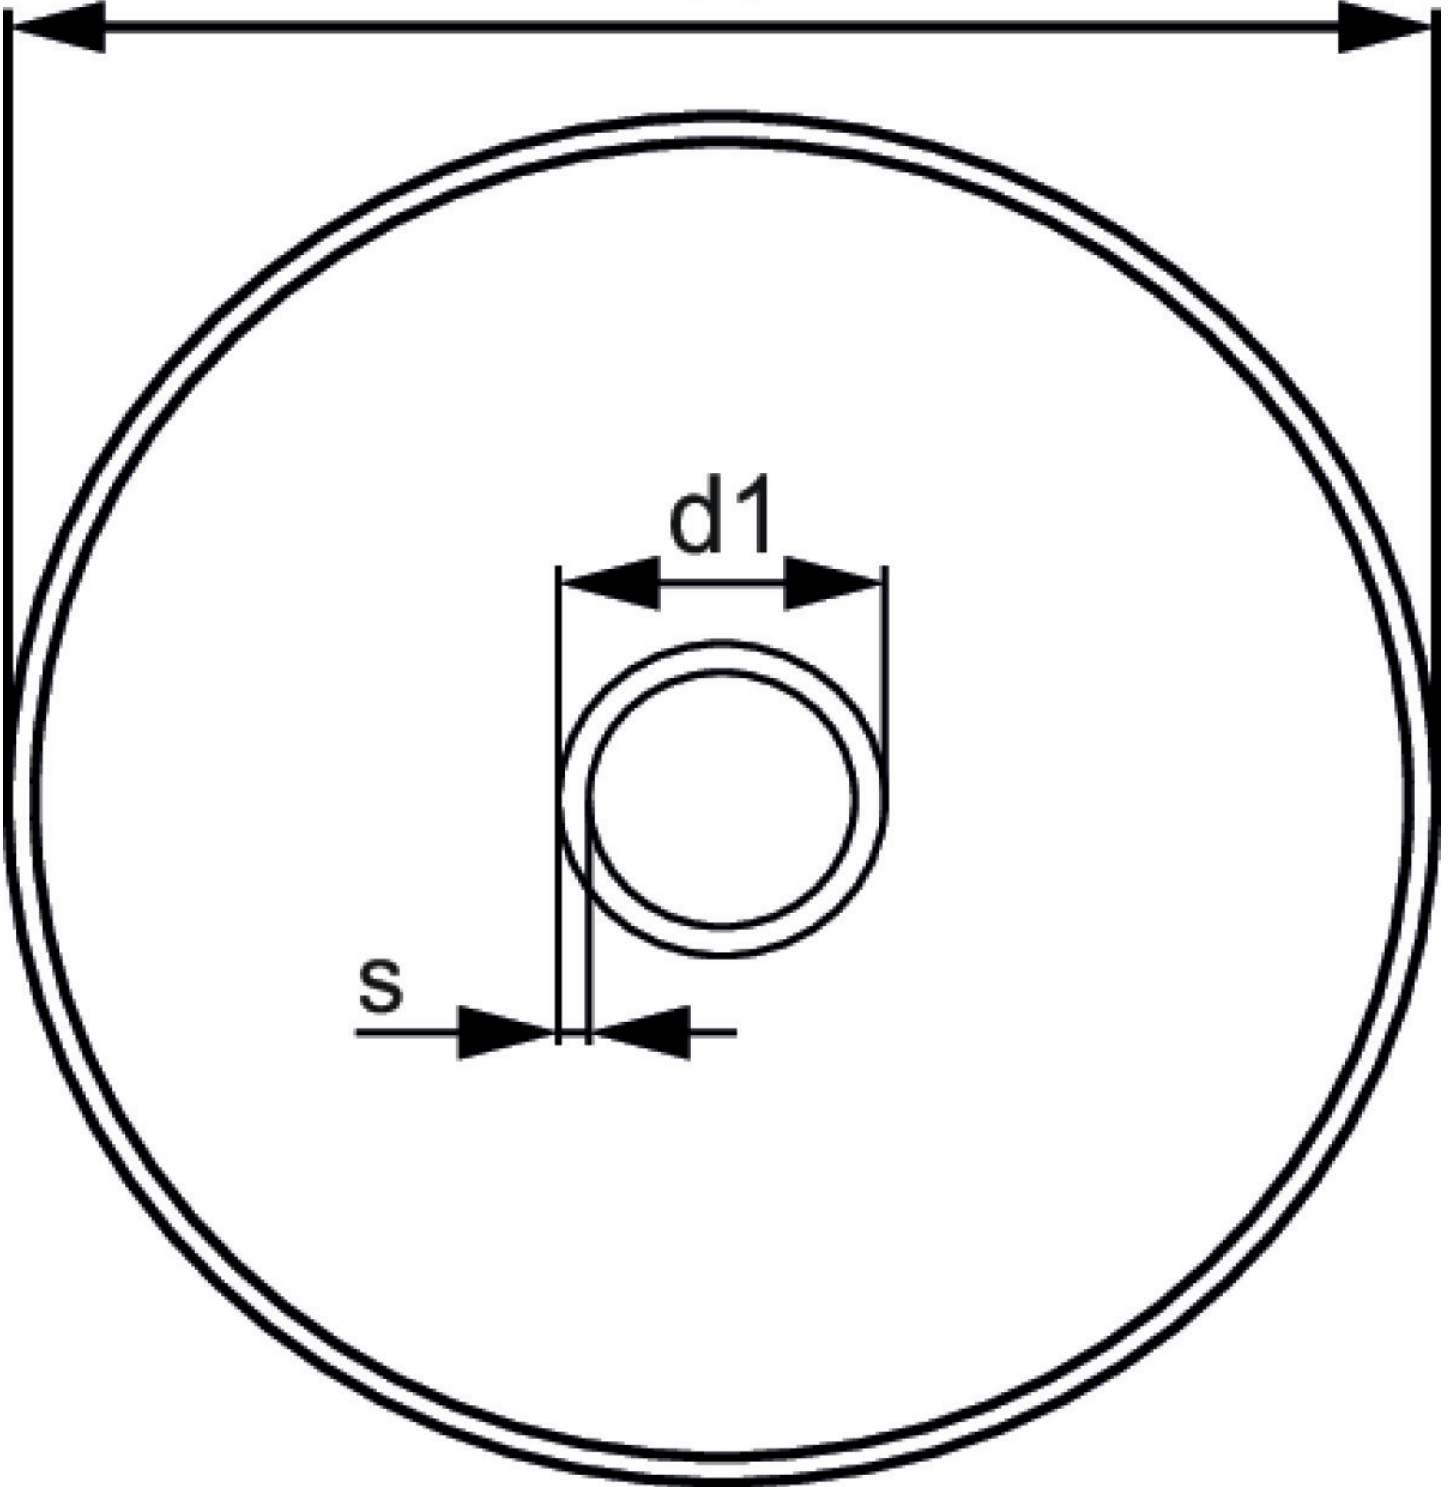

Art. No	label	pipe contents l/m
3041016	25x3.5	0,25



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)