

KELIT PEX

PEX05 KELIT PEX pipe SANITARY 40x5.5

3041026

Areas of application



Medium pipe: made from cross-linked polyethylene, SDR 7.4

Area of application: PN16 / 20°C - PN10 / 80°C - tmax 95°C

Thermal insulation: PUR foam complying with EN 15632, flexible, closed-cell, CFC-free

Jacket pipe: corrugated PE-LD pipe, seamlessly extruded, long-term-protected against UV radiation

Specifications


Technical properties

pipe weight	1,97 kg/m
pipe contents	0,66 l/m
diameter inner tube	40 mm

Product information

casing DA	91
VPE1	1,00 LFM
VPE2	590,00 ROL
L	590
weight	1,560 KGM
text	KELIT PEX pipe SANITARY
INTRNR	39173900
main material group	KELIT PEX
material group	PEX sanitary-pipe
code	PEX05

da

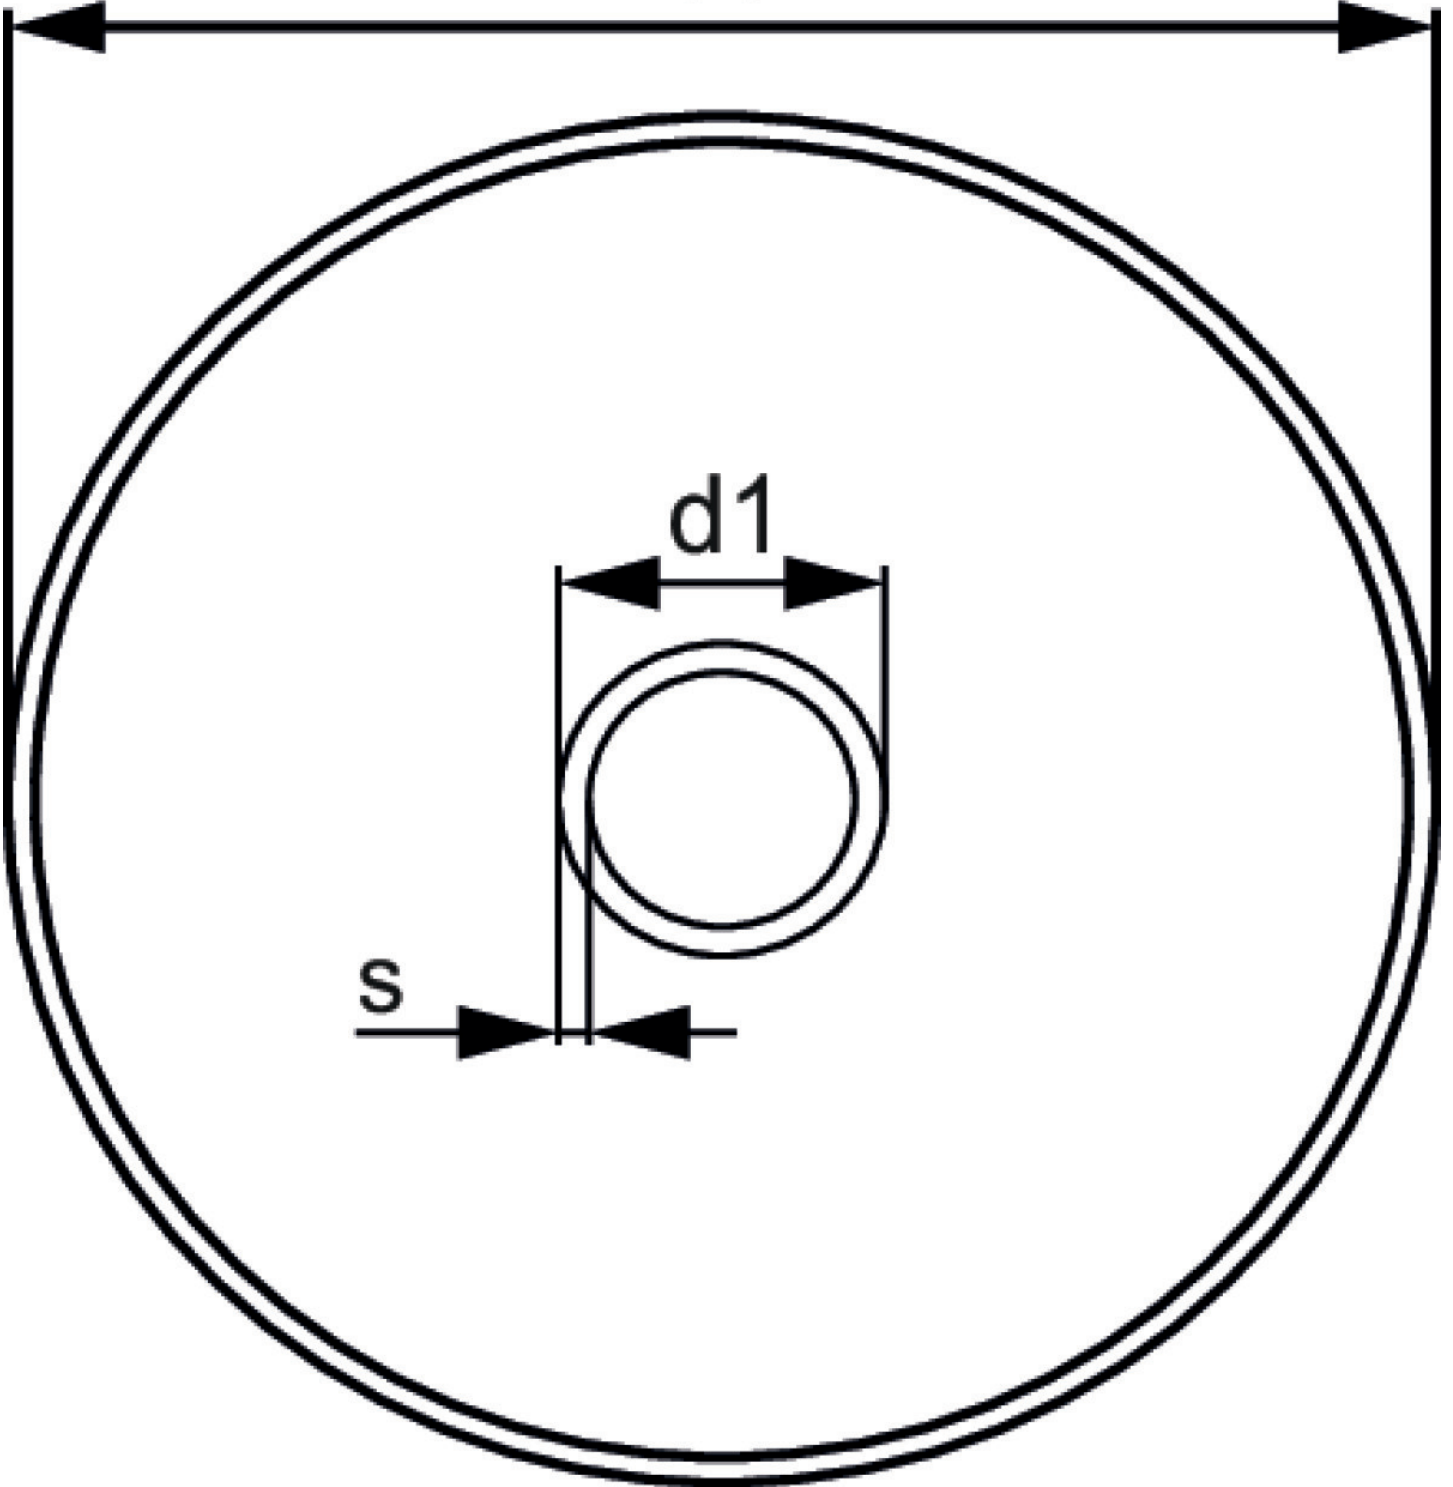

Art. No	label	pipe contents l/m
3041026	40x5.5	0,66



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com