

KELIT PEX

PEX06 KELIT DUO-PEX pipe SANITARY 50x6.9+32x4.4

3041125

Areas of application



Medium pipe: made from cross-linked polyethylene, SDR 7.4

Area of application: PN16 / 20°C - PN10 / 80°C - tmax 95°C

Thermal insulation: PUR foam complying with EN 15632, flexible, closed-cell, CFC-free

Jacket pipe: corrugated PE-LD pipe, seamlessly extruded, long-term-protected against UV radiation

Specifications


Technical properties

| | |
|---------------------|---------------|
| pipe weight | 3,40 kg/m |
| pipe contents | 1,03 0,42 l/m |
| diameter inner tube | 50 mm |

Product information

| | |
|---------------------|-----------------------------|
| casing DA | 126 |
| VPE1 | 1,00 LFM |
| VPE2 | 305,00 ROL |
| L | 305 m |
| weight | 2,920 KGM |
| text | KELIT DUO-PEX pipe SANITARY |
| INTRNR | 39173900 |
| main material group | KELIT PEX |
| material group | PEX sanitary-pipe |
| code | PEX06 |

da

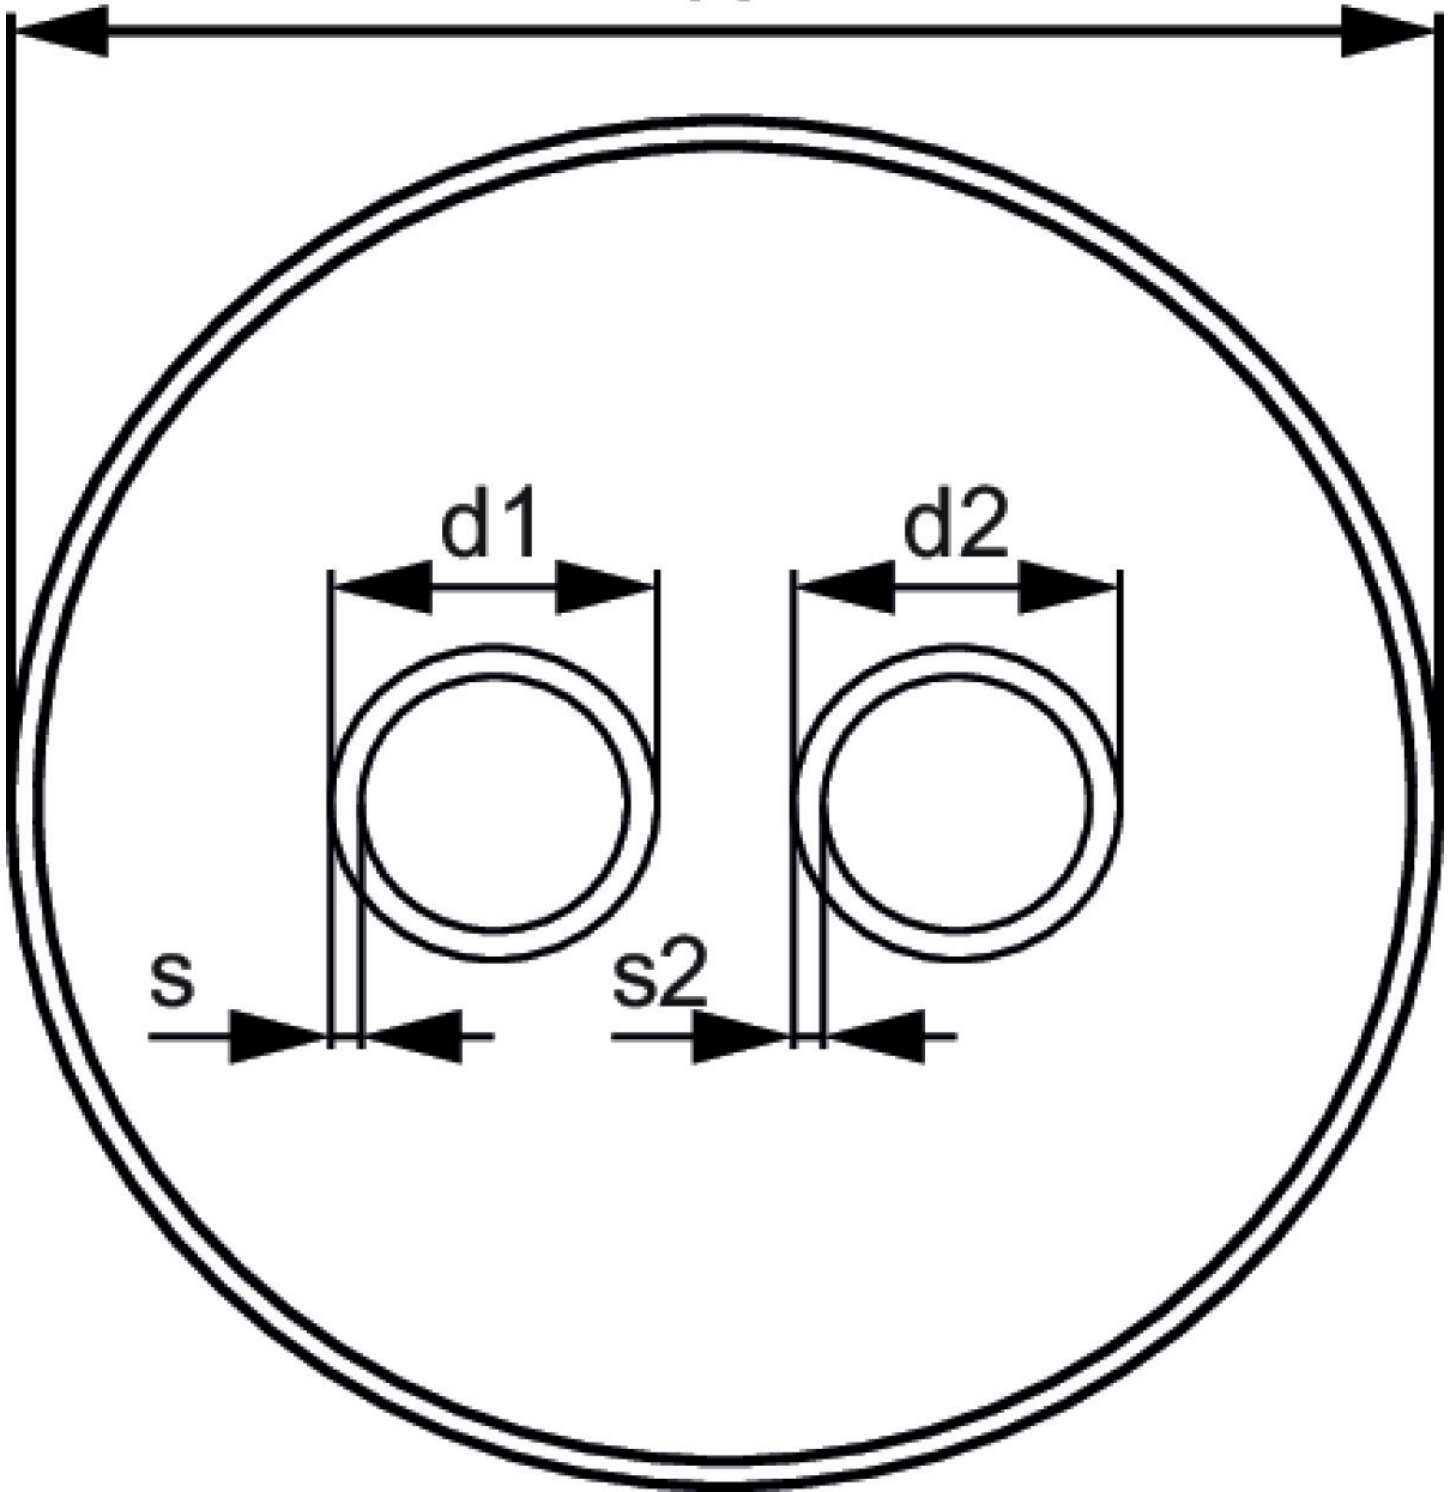

| Art. No | label | pipe contents l/m |
|---------|---------------|-------------------|
| 3041125 | 50x6.9+32x4.4 | 1,03 0,42 |



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com