

# KELOX<sub>FB</sub>

KM590E KELOX FB manifold 6 L: 375mm

7906500

## Areas of application



?Feed and return flow bar with heating circuit outlets 3/4" euro cone with male thread, with bleeding at the highest point and draining, manifold ends closed, connections with pre-formed union nut 1" flat-sealing, manifold ends with 1" male thread, for screwing together individual manifold bars without additional connectors, on the feed line, pre-settable double-spindle valve, top parts to fit KM596 KELOX thermal motor, on the return flow water flow meter (0.5-2.5 l/min), non-porous metallised brass, incl. labelled plates for each heating circuit and sound-insulated metal consoles (1 circuit) without drain outlet, bleeding and metal console

Application area: tmax. 80°C/6 bar

ATTENTION: WITHOUT KM220 Euro thread fitting!

# Specifications

## Article information

<b>extendible</b>	1
-------------------	---

## Product information


<b>VPE1</b>	1,00 KT1
-------------	----------

<b>weight</b>	3,688 KGM
---------------	-----------

<b>text</b>	KELOX FB manifold
-------------	-------------------

<b>INTRNR</b>	84818099
---------------	----------

<b>code</b>	KM590E
-------------	--------

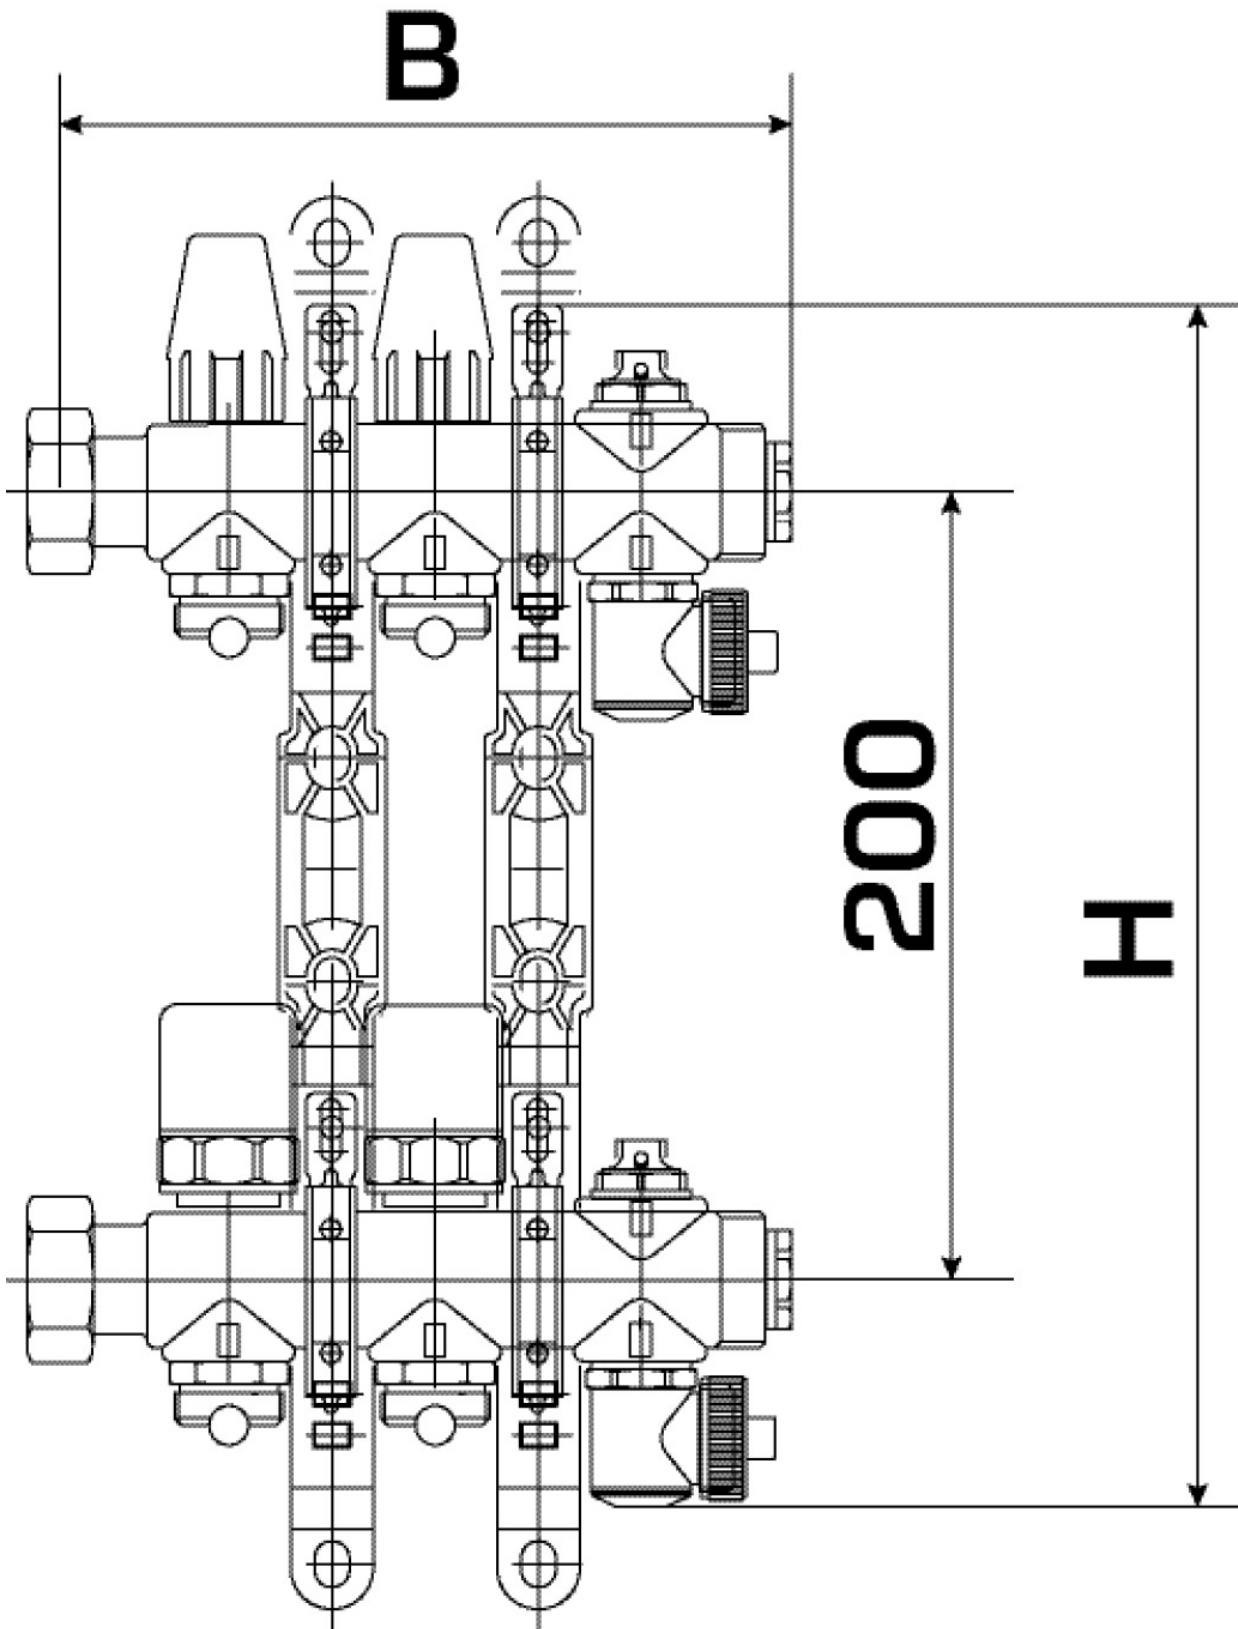

Art. No	label	t mm	t mm	h mm
7906500	6 L: 375mm	80	376	305



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)