


# KELOX<sub>FB</sub>

KMP590E KELOX-PROTEC FB stainless steel push fitting manifold 9 L: 575mm

73171090

## Areas of application

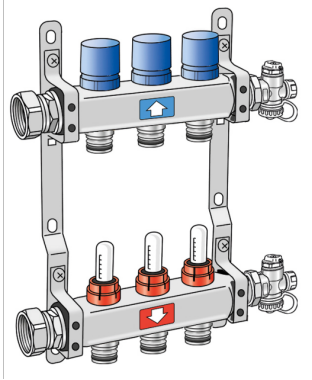

?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnets suitable for KM596 KELOX thermal motor, flow water meter of 0.5-5.0 l/min adjustable, incl. sound-insulated steel consoles

Application area: tmax. 70°C/6 bar

ATTENTION: WITHOUT KMP552 PROTEC quick-push coupling!

# Specifications

## Article information

<b>extendible</b>	1
-------------------	---

## Product information

<b>VPE1</b>	1,00 KT1
-------------	----------


<b>VPE2</b>	63,00 PAL
-------------	-----------

<b>weight</b>	4,936 KGM
---------------	-----------

<b>text</b>	KELOX-PROTEC FB stainless steel push fitting manifold
-------------	---

<b>INTRNR</b>	84818099
---------------	----------

<b>code</b>	KMP590E
-------------	---------

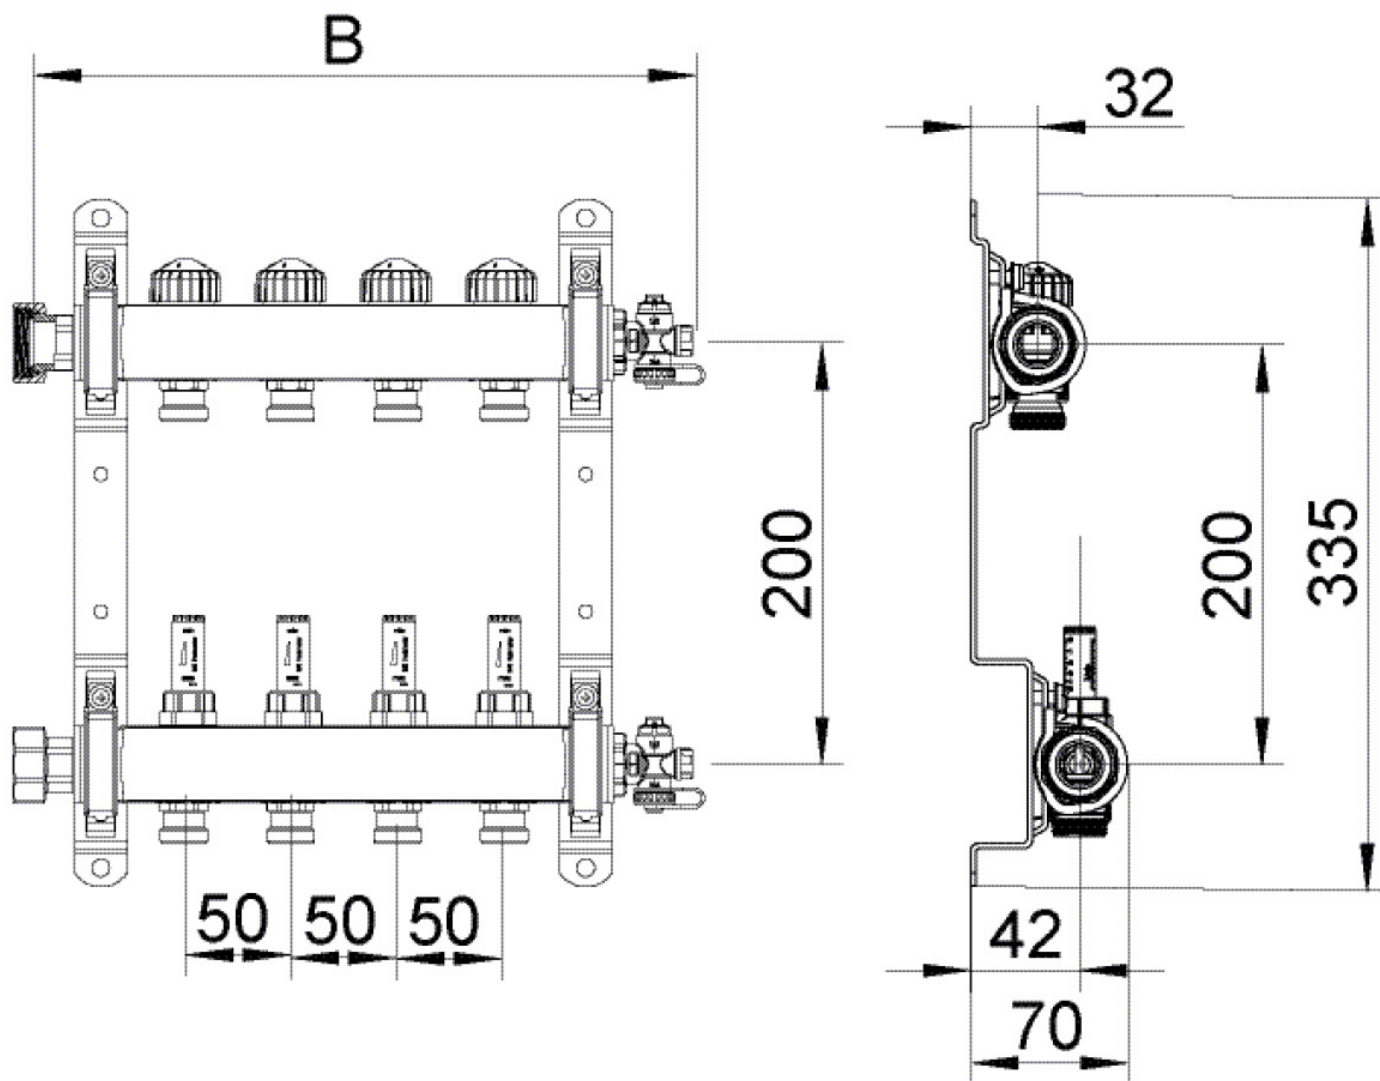

Art. No	label	t mm	t mm	h mm
73171090	9 L: 575mm	80	575	305