


KELOX_{FB}

KU590W ULTRA PE-RT Industrieflächen-Verteiler 6/4"

7966020

Areas of application

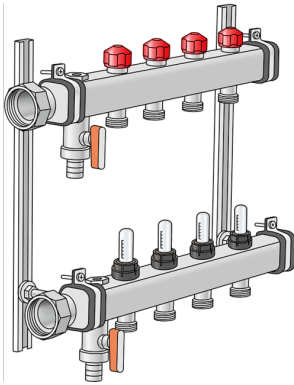

Stainless steel feed and return bars (6/4"), with venting and draining at the manifold end, connections with molded-on union nut 6/4" flat sealing, return water flow meter adjustable from 1-15 l/min, feed with thermostatic valve for setting the water flow, heating circuit outlets with Eurocone 3/4 AG, feed valve tops suitable for KM596 KELOX thermal motor, incl. soundproof steel brackets
Application range: tmax. 80°C/6 bar

ATTENTION WITHOUT KM220 Euro screw fitting!

