

KELOX_{FB}

KMP590E KELOX-PROTEC FB stainless steel push fitting manifold Feed line nipple

731710VL

Areas of application



?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnets suitable for KM596 KELOX thermal motor, flow water meter of 0.5-5.0 l/min adjustable, incl. sound-insulated steel consoles

Application area: tmax. 70°C/6 bar

ATTENTION: WITHOUT KMP552 PROTEC quick-push coupling!

Specifications

Product information

VPE1	1,00 STK
VPE2	10,00 SA1
weight	0,070 KGM
text	KELOX-PROTEC FB stainless steel push fitting manifold
INTRNR	84818099
code	KMP590E




KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

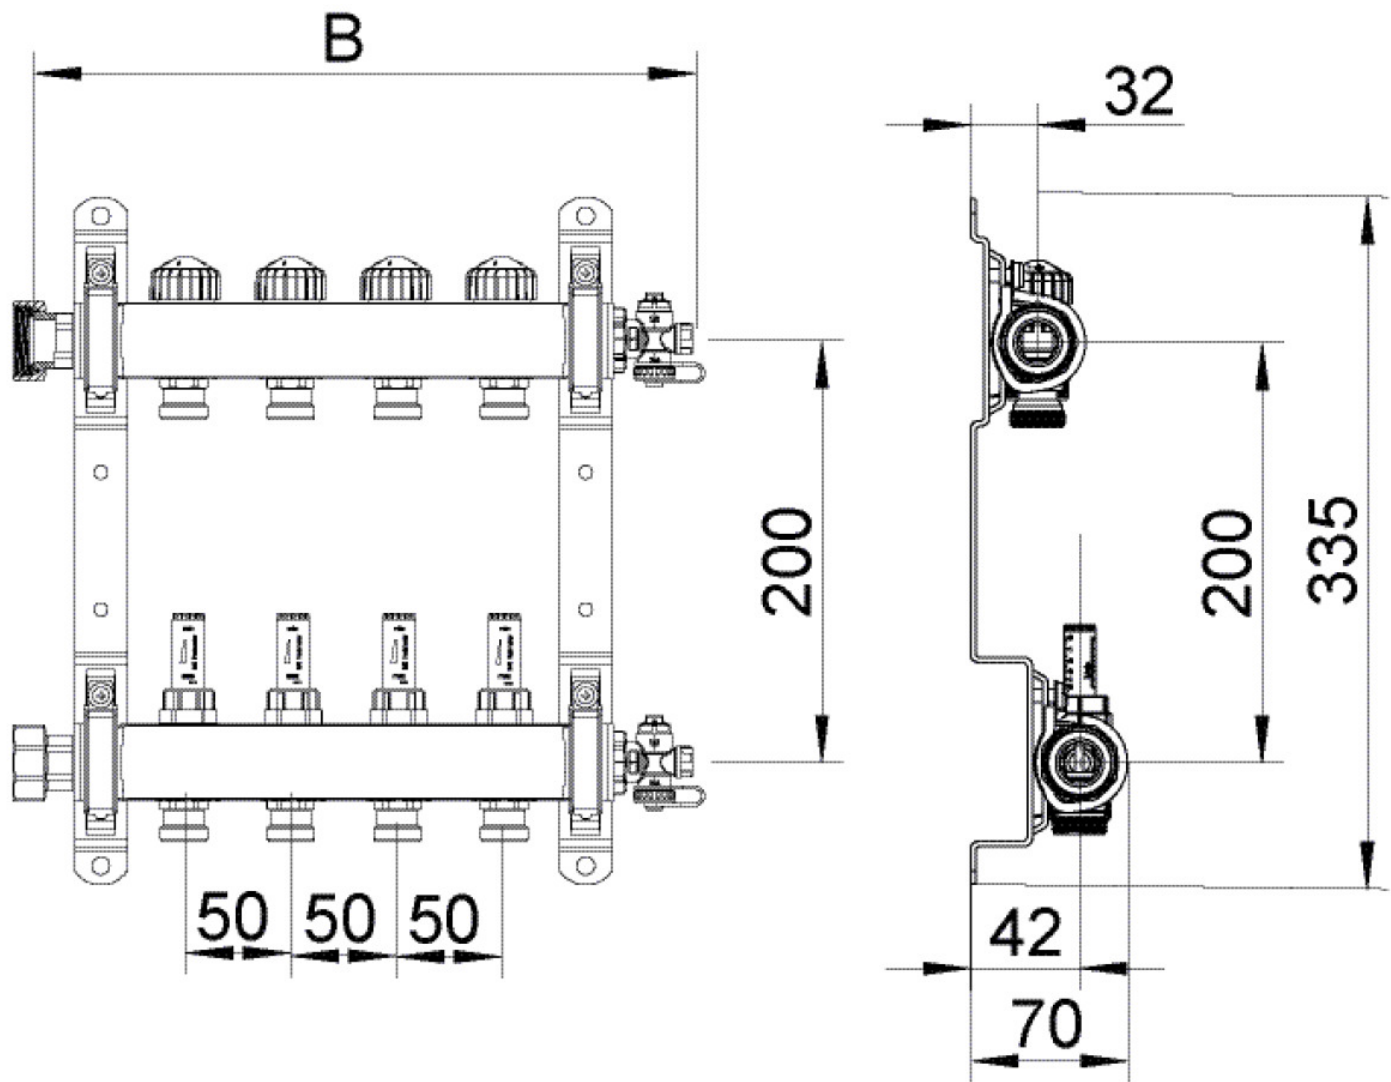

Art. No	label
731710VL	Feed line nipple