


KELOX

KMP432 KELOX-PROTEC radiator tee 20x20/330

73153DD2

Areas of application

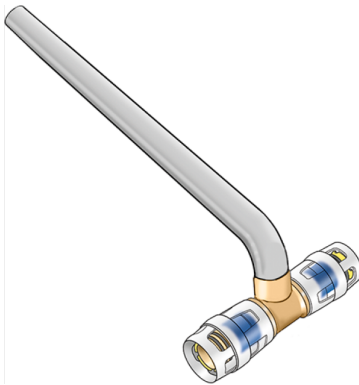

?Radiator connecting pipe made from semi-rigid nickel-plated copper d15, with plug-in adapter tee, made of non-porous metallised brass, incl. push-on sleeve made of transparent polyamide, O-rings, withdrawal barriers and a protector ring as an insertion locking device

ATTENTION: Follow the installation instructions of the screw fitting manufacturers and if necessary use push-on sleeve made of transparent polyamide for CU connections!

Approvals:



Specifications

Article information


port 1	Plug-in
port 2	Plug-in
port 3	Miscellaneous
execution	Tee piece

Technical properties

maximum working pressure at 20 ° C	10 bar
------------------------------------	--------

Product information

VPE1	1,00 SA1
VPE2	16,00 KT1
weight	0,110 KGM
text	KELOX-PROTEC radiator tee
INTRNR	74122000
main material group	KELOX
material group	KELOX-PROtec pushfittings
code	KMP432

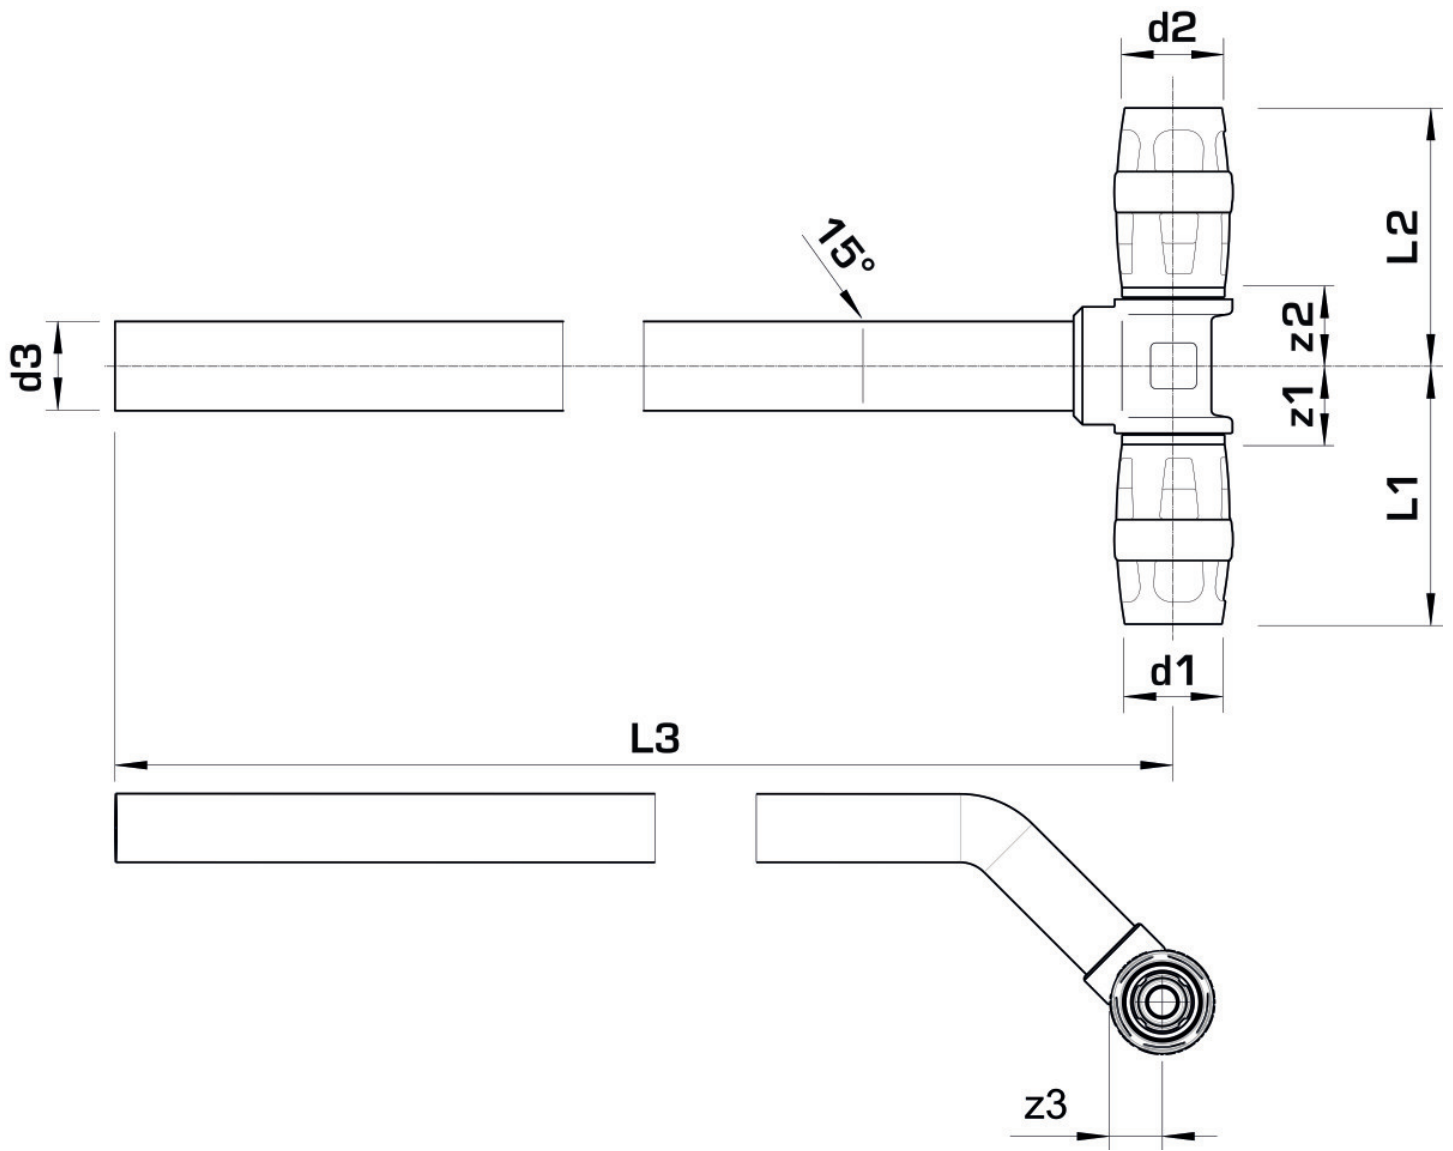

Art. No	label	d1 mm	d2 mm	d3 mm	L1 mm	L2 mm	L3 mm	z1 mm	z2 mm
73153DD2	20x20/330	20	20	15	46,5	46,5	330	13,5	13,5