


STEELOX

SMX100 STEELOX multilayer composite pipe 20x2.25

57001D00

Areas of application

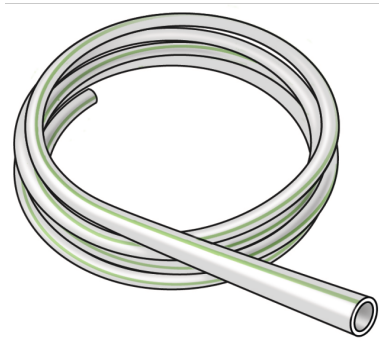

STEELOX pipe conforming to ÖNORM B 5175, oxygen- and steam diffusion-tight multi-layer composite pipe made of stainless steel/PE-RT

Classification of operating conditions as per ÖNORM B 5175 - Class 2:

70°C/10 bar, max. operating temperature up to 80°C - accident temperature 100°C (max. 100h)

Colour: silver with green longitudinal stripes

Supplied in coils

Approvals:



Specifications

Article information

color	Silver with green longitudinal stripes
flexible	Yes
trade length	100 m
isolation	No

Technical properties

maximum working pressure at 20 ° C	10 bar
pipe weight	0,15 kg/m
pipe contents	0,189 l/m
lambda pipe	0,45 W/(m.K)
wall rawness	0,01 mm
expansion coefficient	0,045 mm/(m.K)

Product information

VPE1	100,00 ROL
VPE2	1300,00 PAL
L	100 m
weight	0,157 KGM
text	STEELOX multilayer composite pipe
INTRNR	39173900
code	SMX100



Art. No	label	d1 mm	pipe contents l/m	s mm
57001D00	20x2.25	20	0,189	2,25



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com