


# STEEL FIX C-STAHL

CF150 STEELFIX carbon steel pipe female/male  
galv. 35x1.5

54031F00

## Areas of application

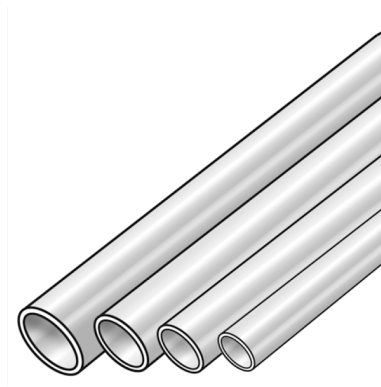

Thin-walled, longitudinally welded stainless steel pipes according to EN 10305-3 with particularly low carbon content and with the inside and outside coated with a thermally applied Sendzimir-zinc layer and the outside additionally protected by a passivating/chromium layer

Application area: Purple protective caps

Rod length: 6m

Application areas:

Closed wet sprinkler systems:

d15 - 108 mm - 35°C to 70°C/16bar

Dry compressed air systems (in conjunction with press fittings ONLY):

d15 - 54 mm - max. 16 bar

d76 - 108 mm - max. 10 bar



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

## Technical properties

pipe weight 1,24 kg/m

pipe contents 0,804 l/m

## Product information

VPE1 222,00 BND

L 6 m

weight 1,240 KGM

text STEELFIX carbon steel pipe female/male galv.

INTRNR 73065080

main material group STEELFIX

material group C-STAHl pipes

code CF150



Art. No	label	d	d1 mm	pipe contents l/m	s mm
54031F00	35x1.5	32	35	0,804	1,5



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)