


STEEL FIX EDELSTAHL

NP440 STEELFIX stainless steel press-fit-tee
22/22/22

53630DDD

Areas of application

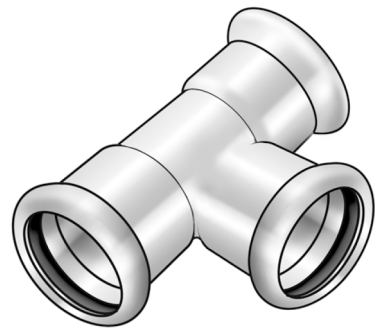

Press-tee equal or reduced made of stainless steel 1.4404, incl. EPDM sealing elements, d15-54

"leak before pressed"

Press contour: M

Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

Specifications

Article information

| | |
|---------------|------------|
| port 1 | Pressmuffe |
| port 2 | Pressmuffe |
| port 3 | Pressmuffe |
| execution | T-Stück |
| press contour | M |

Technical properties

| | |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

Product information

| | |
|----------------|--|
| VPE1 | 10,00 SA1 |
| VPE2 | 40,00 KT1 |
| VPE3 | 1000,00 DDP |
| weight | 0,108 KGM |
| text | STEELFIX stainless steel press-fit-tee |
| INTRNR | 73072980 |
| material group | EDELSTAHL pressfittings |
| code | NP440 |



| Art. No | label | d1 mm | d2 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm |
|----------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 53630DDI | 22/22/22 | 22 | 22 | 22 | 39,5 | 43,5 | 39,5 | 18,5 | 22,5 | 18,5 |