


# STEEL FIX EDELSTAHL

NP440 STEELFIX stainless steel press-fit-tee  
108/28/108

53630LEL

## Areas of application

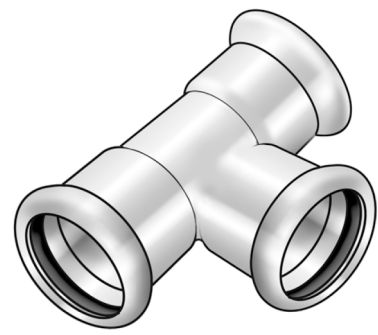

Press-tee equal or reduced made of stainless steel 1.4404, incl. EPDM sealing elements, d15-54

"leak before pressed"

Press contour: M

## Approvals:



# Specifications

## Article information

|               |            |
|---------------|------------|
| port 1        | Pressmuffe |
| port 2        | Pressmuffe |
| port 3        | Pressmuffe |
| execution     | T-Stück    |
| press contour | M          |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                |  |
|----------------|--|
| VPE1           | 1,00 SA1                               |
| VPE2           | 4,00 KT1                               |
| weight         | 1,865 KGM                              |
| text           | STEELFIX stainless steel press-fit-tee |
| INTRNR         | 73072980                               |
| material group | EDELSTAHL pressfittings                |
| code           | NP440                                  |



| Art. No  | label     | d1 mm | d2 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm |
|----------|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 53630LEL | 108/28/10 | 108   | 28    | 108   | 156   | 88    | 156   | 79    | 65    | 79    |