


# KETRIX

## TRI35 KETRIX reducer-tee 40/20/40

55114GDG

### Areas of application

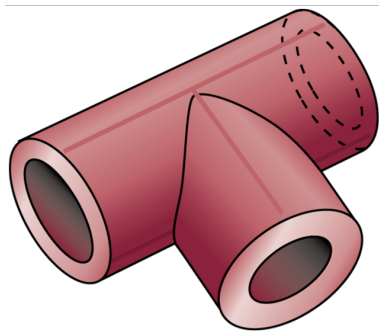

KETRIX polyfusion weld fitting for connecting POB pipes to fittings made of the same material without narrowing the cross section

# Specifications

## Article information


|           |                        |
|-----------|------------------------|
| port 1    | Plastic welding socket |
| port 2    | Plastic welding socket |
| port 3    | Plastic welding socket |
| execution | T-piece                |
| angle     | 90 °                   |

## Technical properties

|                                    |        |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 16 bar |
|------------------------------------|--------|

## Product information

|                     |                         |
|---------------------|-------------------------|
| VPE1                | 5,00 SA1                |
| VPE2                | 25,00 KT1               |
| VPE3                | 150,00 KT2              |
| VPE4                | 2400,00 PAL             |
| weight              | 0,098 KGM               |
| text                | KETRIX reducer-tee      |
| INTRNR              | 39174000                |
| main material group | KETRIX                  |
| material group      | KETRIX plastic fittings |
| code                | TRI35                   |

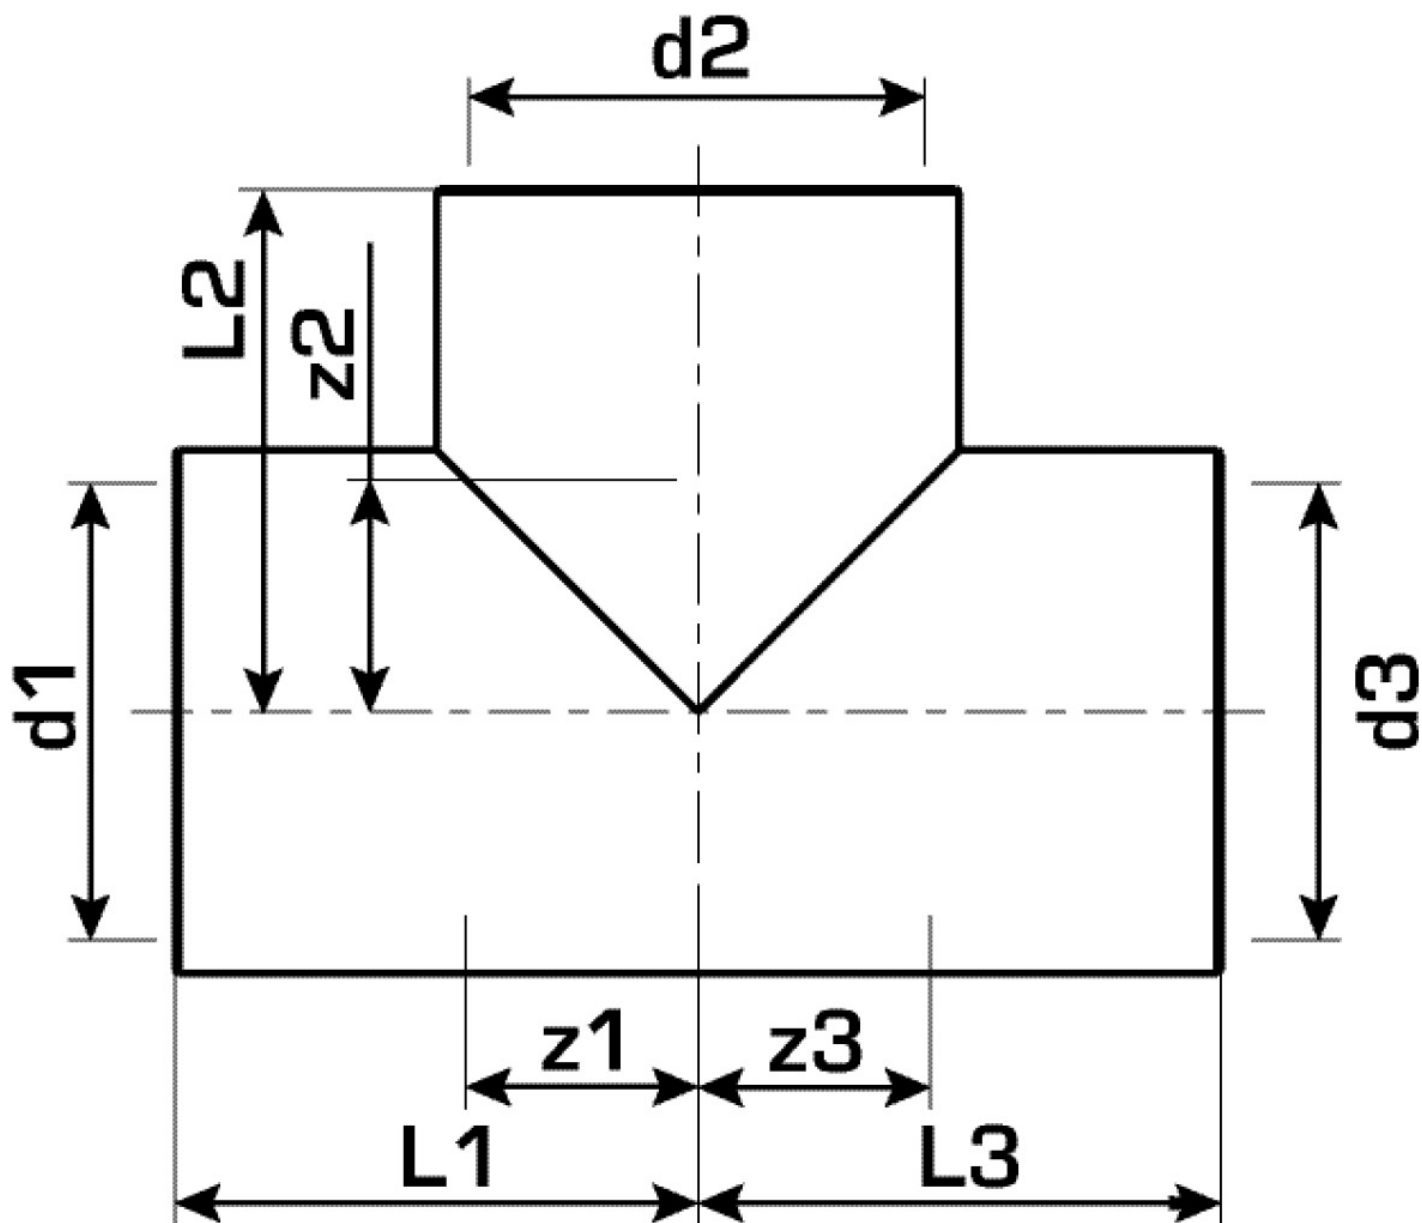

| Art. No | label    | d1 mm | d2 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm |
|---------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 55114GD | 40/20/40 | 40    | 20    | 40    | 47    | 40    | 47    | 21    | 25    | 21    |