


# KELOX<sub>FB</sub>

KM590E KELOX FB manifold 3 L: 225mm

7903500

## Areas of application



?Feed and return flow bar with heating circuit outlets 3/4" euro cone with male thread, with bleeding at the highest point and draining, manifold ends closed, connections with pre-formed union nut 1" flat-sealing, manifold ends with 1" male thread, for screwing together individual manifold bars without additional connectors, on the feed line, pre-settable double-spindle valve, top parts to fit KM596 KELOX thermal motor, on the return flow water flow meter (0.5-2.5 l/min), non-porous metallised brass, incl. labelled plates for each heating circuit and sound-insulated metal consoles (1 circuit) without drain outlet, bleeding and metal console

Application area: tmax. 80°C/6 bar

ATTENTION: WITHOUT KM220 Euro thread fitting!

# Specifications

## Article information

|                   |   |
|-------------------|---|
| <b>extendible</b> | 1 |
|-------------------|---|

## Product information


|             |          |
|-------------|----------|
| <b>VPE1</b> | 1,00 KT1 |
|-------------|----------|

|               |           |
|---------------|-----------|
| <b>weight</b> | 2,312 KGM |
|---------------|-----------|

|             |                   |
|-------------|-------------------|
| <b>text</b> | KELOX FB manifold |
|-------------|-------------------|

|               |          |
|---------------|----------|
| <b>INTRNR</b> | 84818099 |
|---------------|----------|

|             |        |
|-------------|--------|
| <b>code</b> | KM590E |
|-------------|--------|

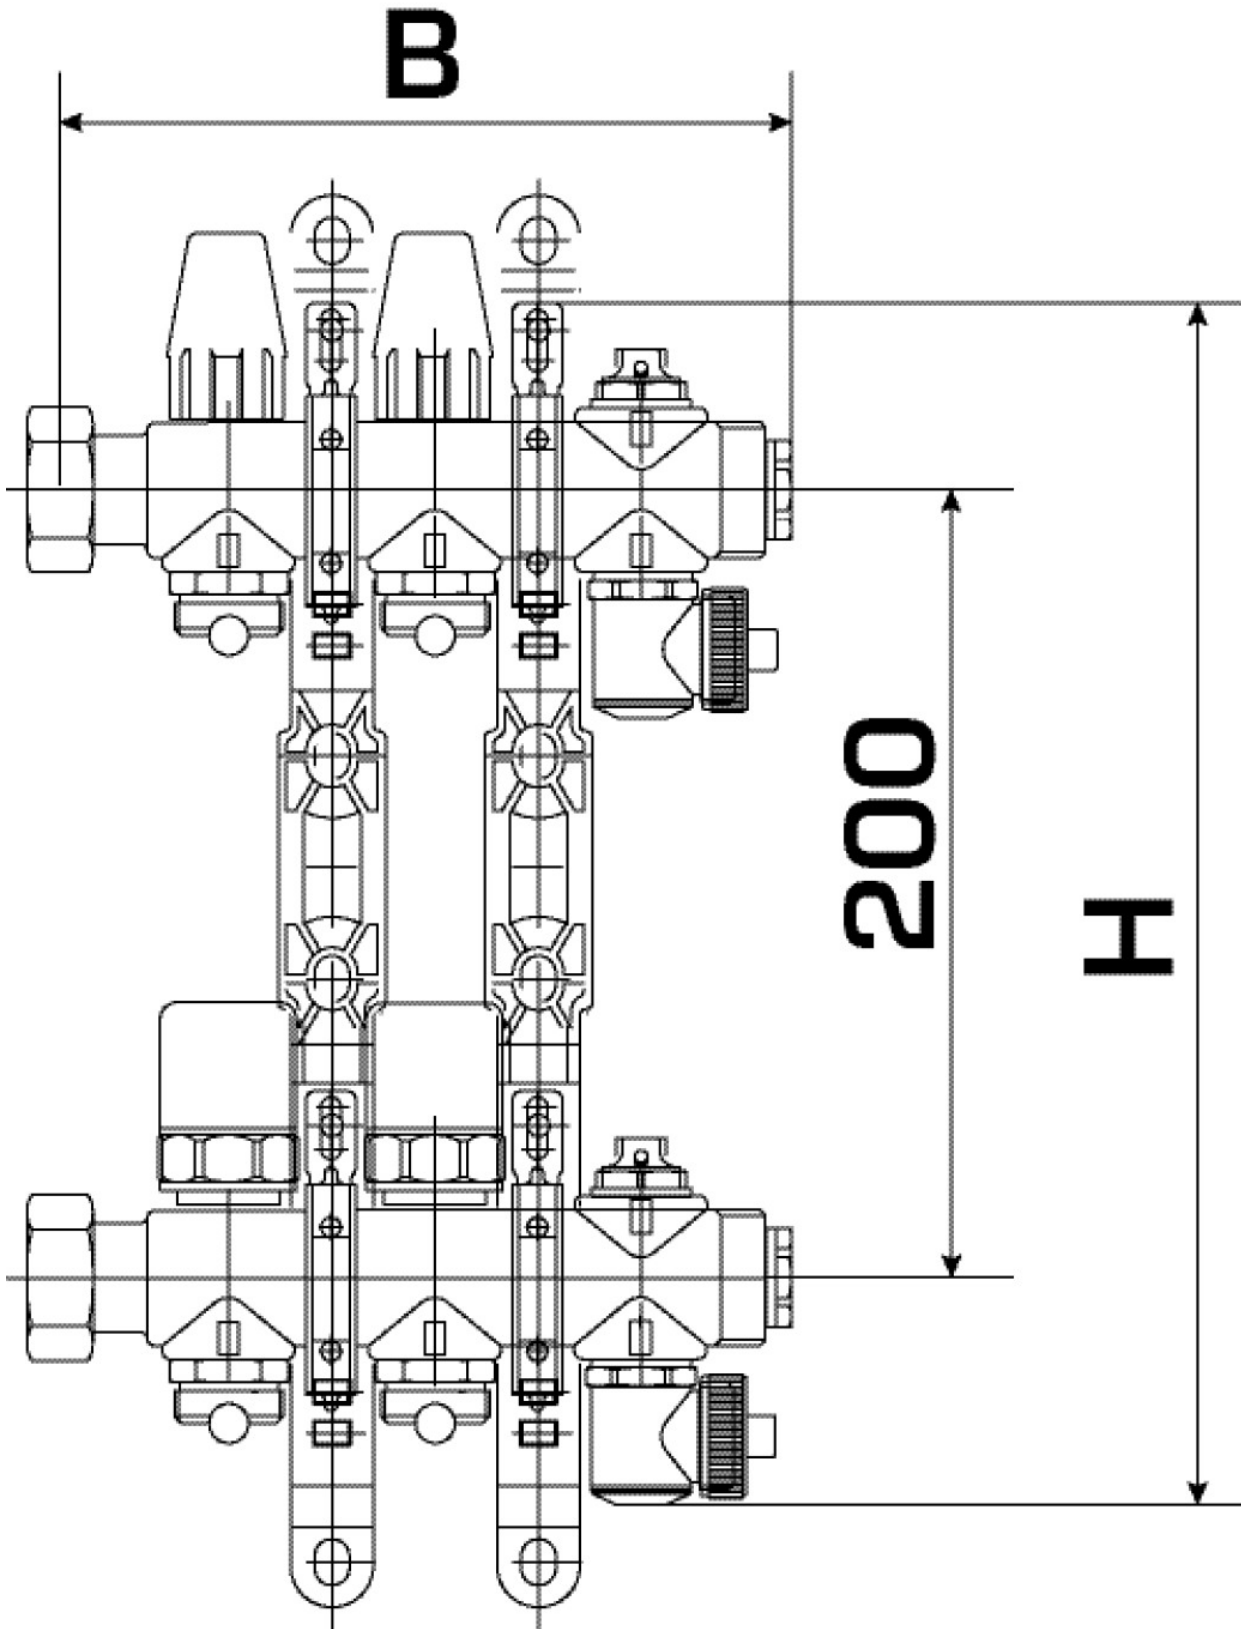

| Art. No | label      | t mm | t mm | h mm |
|---------|------------|------|------|------|
| 7903500 | 3 L: 225mm | 80   | 226  | 305  |



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)