


KELOX_{FB}

KM636K KELOX FB adhesive Velcro foil 6mm

6060510

Areas of application

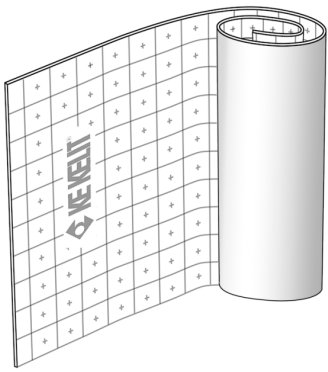

Extruded PE foam, closed-cell 100% HCFC- and HFC-free self-adhesive over the full surface area with laminated velours fabric for fixing KELOX-ULTRAX FB Velcro tubes and ULTRA PE-RT Velcro tubes without additional fastening.

With thin-layer heated screeds, you must only ever use the KELOX-ULTRAX FB Velcro tube!

Thickness: 6mm

Max. load-bearing capacity: 5 kN/m²

Footfall sound improvement factor approx. 13 dB

Thermal conductivity: 0.045 W/mK

Water vapour diffusion resistance: approx. 15,000 My

Supplied in coils: 20x1m

With thin-layer heated screeds, you must only ever use the KELOX-ULTRAX FB pipe!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

ATTENTION: Protect from direct sunlight, do not store outdoors!

Max. storage temperature 40°C!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Technical properties

suitable for pipe diameter 16 – 16 mm

Product information

VPE1 20,00 KT1

weight 0,040 KGM

text KELOX FB adhesive Velcro foil

INTRNR 39211390

code KM636K

Art. No	label
---------	-------

6060510	6mm
---------	-----