


KELOX_{FB}

KMP590Z KELOX-PROTEC FB stainless steel push fitting manifold, 10bar 12 L: 725mm

73173120

Areas of application

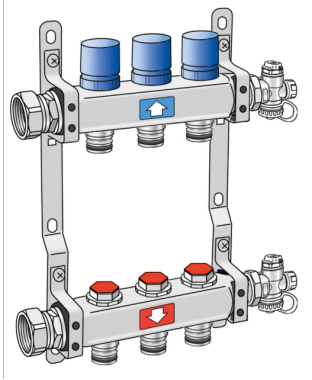

?Stainless steel flow and return flow bar with pluggable heating circuit outlets, with bleeding and emptying at the manifold end, connections with screwed-in 1" flat-sealing cap nut. Return flow valve bonnets suitable for KM596 KELOX thermal motor, flow shut-off valve, incl. sound-insulated steel consoles

Application area: tmax. 70°C/10 bar

ATTENTION: WITHOUT KMP552 PROTEC quick-push coupling!

Specifications

Article information

extendible	1
-------------------	---

Product information

VPE1	1,00 KT1
-------------	----------


VPE2	49,00 PAL
-------------	-----------

weight	6,120 KGM
---------------	-----------

text	KELOX-PROTEC FB stainless steel push fitting manifold, 10bar
-------------	--------------------------------------------------------------

INTRNR	84818099
---------------	----------

code	KMP590Z
-------------	---------

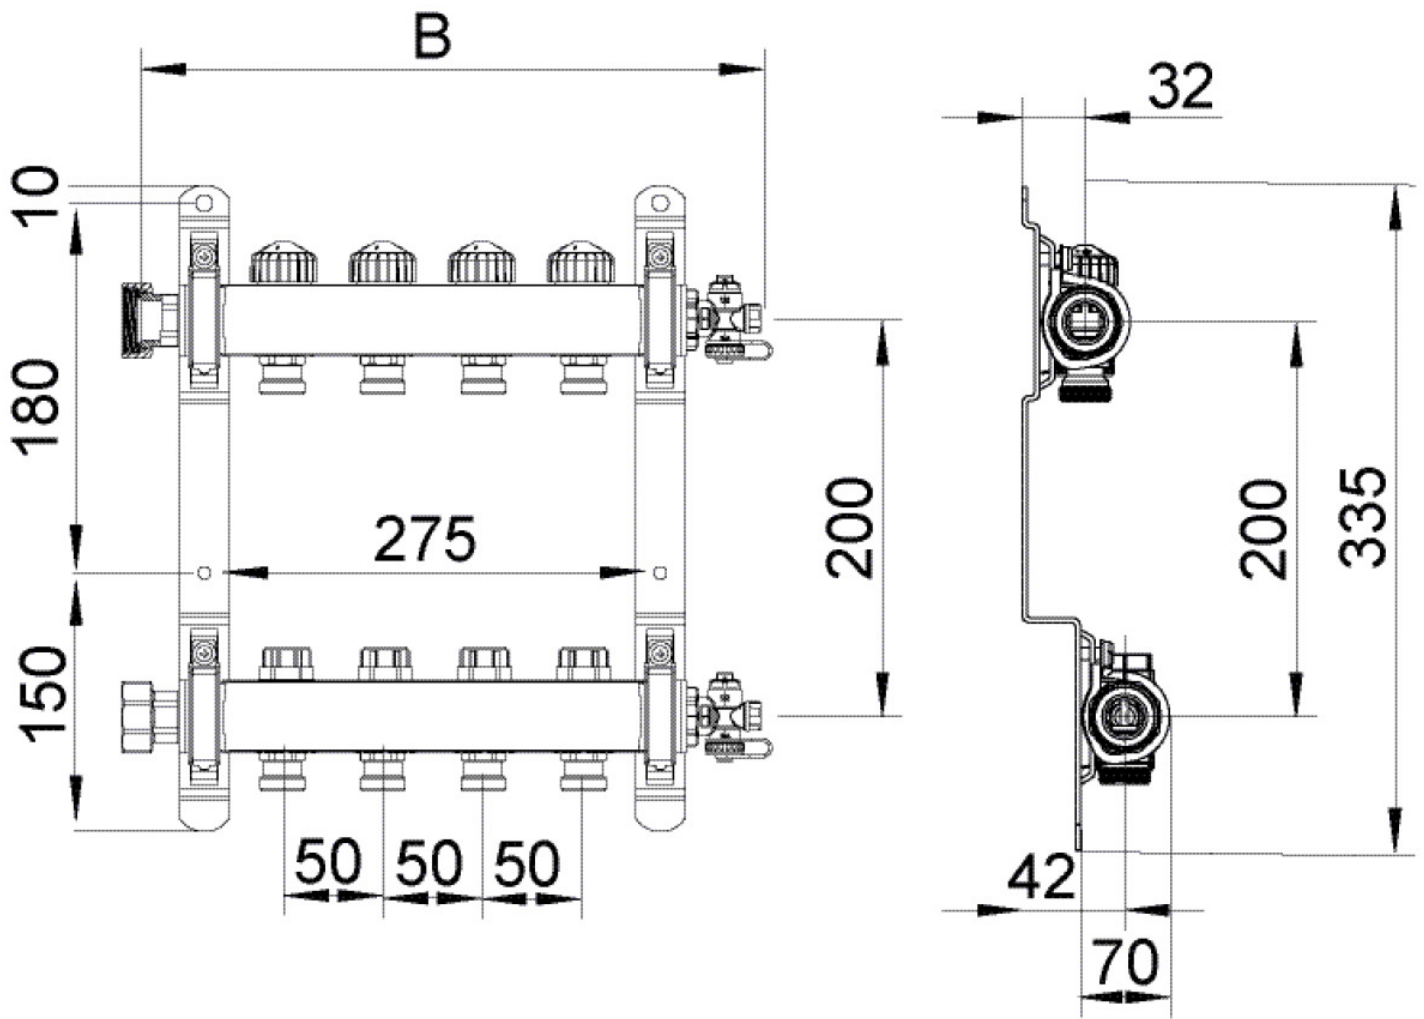

Art. No	label	t mm	t mm	h mm
73173120	12 L: 725mm	80	725	305