


# KELOX<sub>FB</sub>

KM695B KELOX 230V wireless receiver  
290x52x75mm RAL7035

5881365

## Areas of application

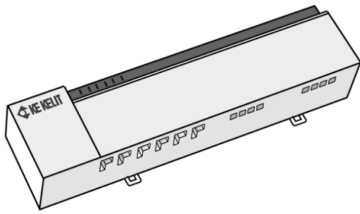

For connecting a maximum of 8 room thermostats, possible to connect up to 12 (230 V) thermal motors, potential-free contact for a changeover signal, as well as pump logic for switching a 230 V/200 W circulation pump, up to 7 KM695B or KM695S can be connected via wireless and/or syBUS.

Integration into a network by means of an RJ45 Ethernet port is possible, operation by means of a Web interface or smartphone app (a network connection is necessary) or via a KM694K room unit. Integration by means of an XML interface into a centralised instrumentation and control system; maximum distance from wireless room thermostat 3 walls and 1 storey ceiling

Connection voltage: 230V AC 50 Hz

Wireless frequency: 868 MHz

Size: 290x52x75mm

Colour: light grey (RAL 7035)

ATTENTION: Take into account space requirement in manifold cabinet!

Only in conjunction with KM694 or KM694K wireless room thermostats!

Only in conjunction with KM596 KELOX 230V thermal motor!



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

| Product information |                              |
|---------------------|------------------------------|
| VPE1                | 1,00 KT1                     |
| VPE2                | 10,00 KT2                    |
| weight              | 0,830 KGM                    |
| text                | KELOX 230V wireless receiver |
| INTRNR              | 90321020                     |
| code                | KM695B                       |

| Art. No | label               |
|---------|---------------------|
| 5881365 | 290x52x75mm RAL7035 |