


KELOX_{FB}

KMP590M KELOX-PROTEC FB push fitting manifold 6 L: 375mm

73174060

Areas of application

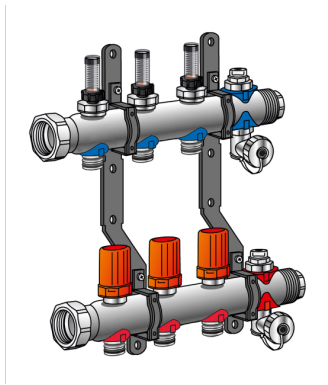

?Feed and return flow bar with pluggable heating circuit outlets, with bleeding at the highest point and draining, manifold ends closed, connections with pre-formed union nut 1" flat-sealing, manifold ends with 1" male thread, for screwing together individual manifold bars without additional connectors, on the feed line, pre-settable double-spindle valve, top parts to fit KM596 KELOX thermal motor, on the return flow water flow meter (0.5-2.5 l/min), non-porous metallised brass, incl. labelled plates for each heating circuit and sound-insulated metal consoles (1 circuit) without drain outlet, bleeding and metal console

Application area: tmax. 80°C/6 bar

ATTENTION: WITHOUT KMP552 PROTEC quick-push coupling!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Article information

extendible	1
-------------------	---

Product information


VPE1	1,00 KT1
-------------	----------

weight	3,688 KGM
---------------	-----------

text	KELOX-PROTEC FB push fitting manifold
-------------	---------------------------------------

INTRNR	84818099
---------------	----------

code	KMP590M
-------------	---------

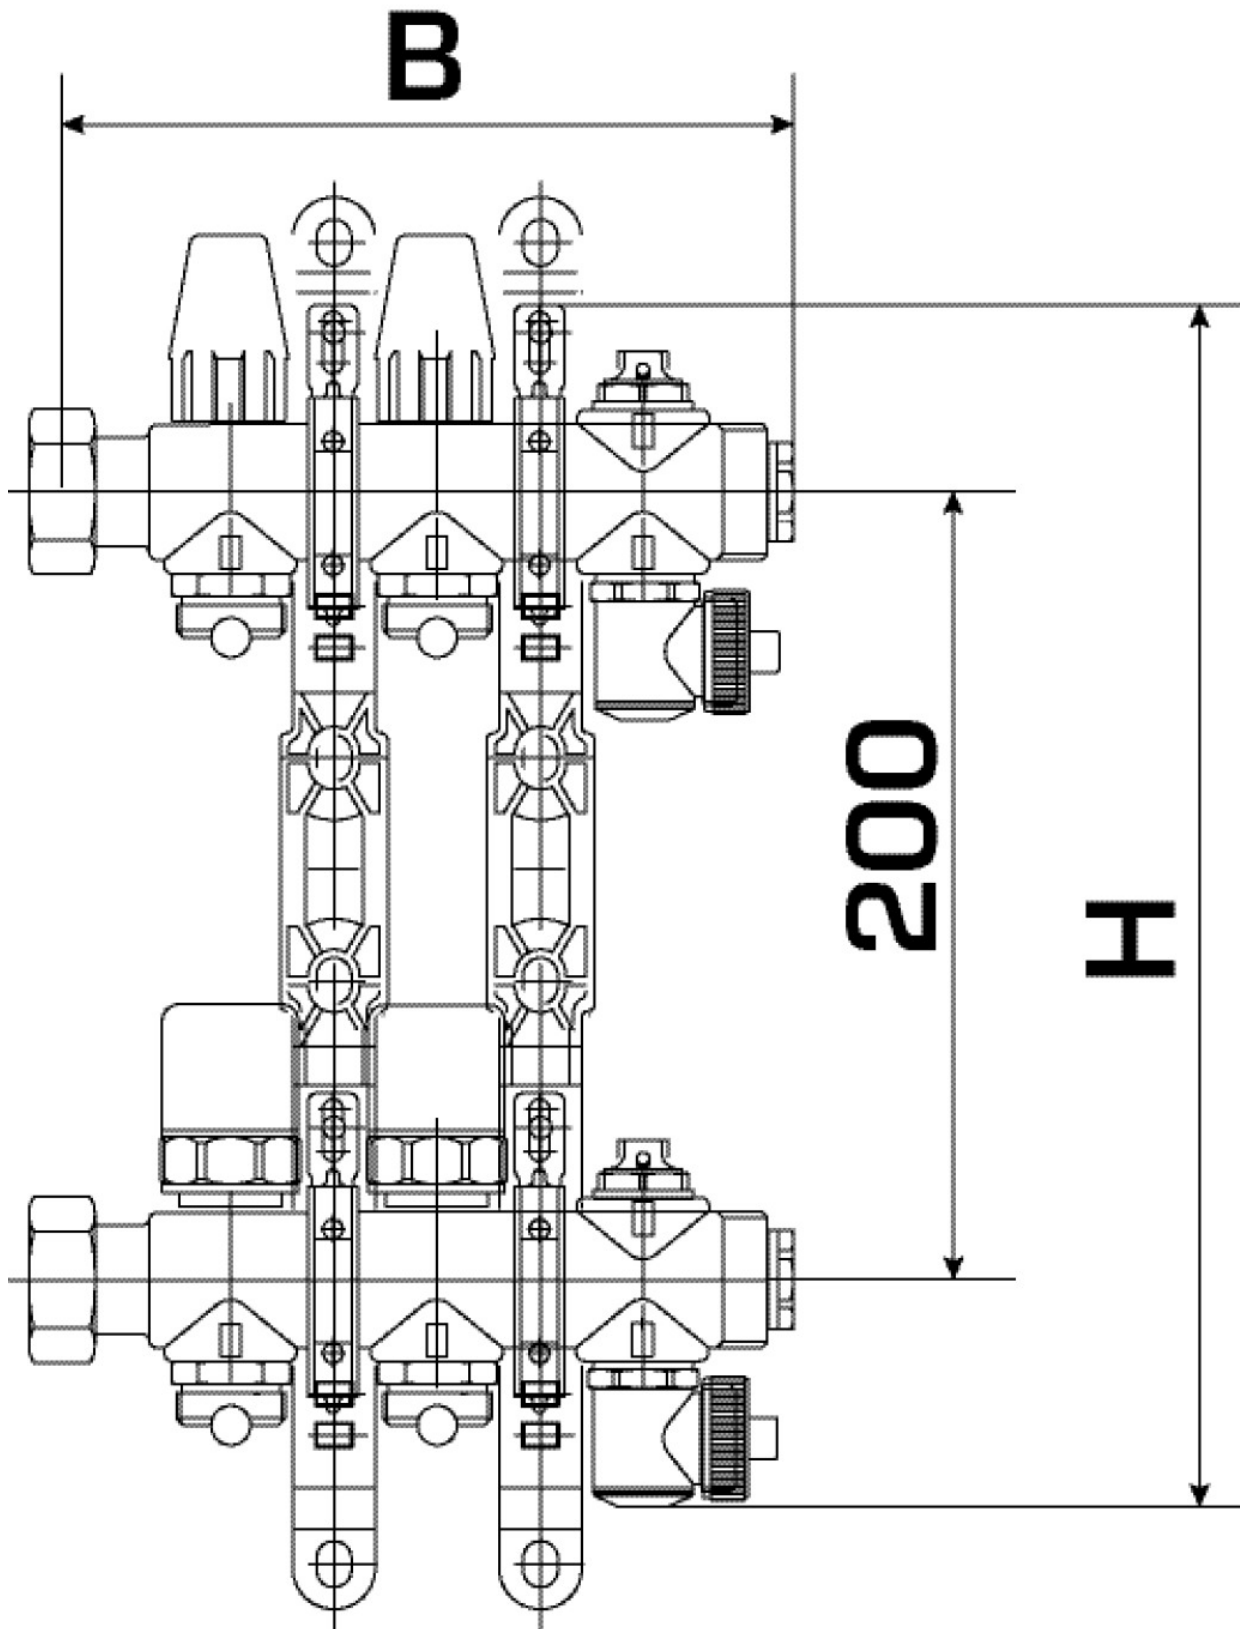

Art. No	label	t mm	t mm	h mm
73174060	6 L: 375mm	80	376	305



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com