


TRI1008 KETRIX-CX pipe - PN16 75x10.3

3019370

Areas of application

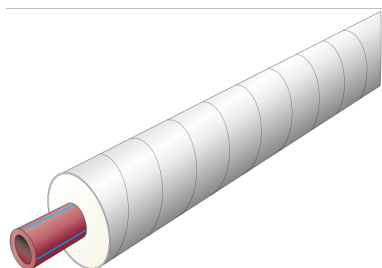

Pre-insulated industrial pipe system based on ÖNORM EN ISO 15874

Medium pipe: d20-110 = TRI08, adhesion-pretreated

Application area: 20°C/16 bar - from -30°C to +40°C/10 bar

Insulation: PUR rigid foam

Jacket pipe: 0.6 mm galvanised folded spiral sheet metal

Length: 6m

Specifications

Product information	
casing DA	160
VPE1	6,00 STG
L	6 m
weight	6,090 KGM
text	KETRIX-CX pipe - PN16
INTRNR	39172290
main material group	KETRIX CX/PE
material group	KETRIX CX/PE pipes and fittings
code	TRI1008

Art. No	label
3019370	75x10.3

