


KETRON

KET165 KETRON wall-mounted washbasin tap,
surface-mounted communication box 200mm
commbox

21801650

Areas of application

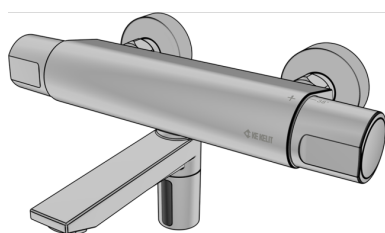

Contactless, electronically controlled surface-mounted wall-mounted washbasin tap, high pressure with infrared sensor, hygiene flushing programme and thermostatic mixer. With temperature barrier max. 43°C, can be converted to max. 38°C. Thermal flushing can be carried out by unlocking the thermostat. Surface chrome-plated, operating pressure: 0.3 - 10 bar - max. 80°C. Inside micrometer 150mm, 3/4" connection with flat seal, with S connections G1/2" male thread to G3/4" male thread. Battery operated. With KET950 communication box for app compatibility, demand-driven hygiene flushing, protocol function for recording usage and hygiene flushing, simplified configuration. The length of the projection is indicated.

Specifications

Product information	
VPE1	1,00 KT1
weight	4,300 KGM
text	KETRON wall-mounted washbasin tap, surface-mounted communication box
INTRNR	84818011
code	KET165

Art. No	label
21801650	200mm commbox

