


NF2000 STEELFIX-PE stainless steel pipe 1.4401 42x1.5

3000375

Areas of application

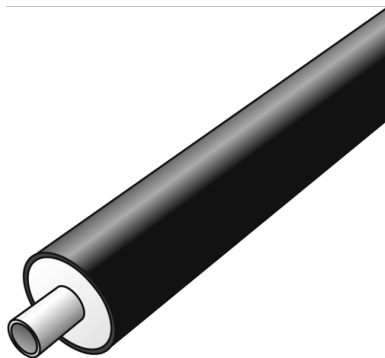

Pre-insulated stainless steel piping system

Medium pipe: Thin-walled, longitudinally welded stainless steel pipes 1.4401 according to EN 10312 and EN 10217-7 outside and inside bare metallic

Application area: Drinking water installations, service water and rain water, compressed air

Operating temperature: - 35°C to 120°C/16 bar - tmax 150°C - short-term

Insulation: PUR hard foam, jacket pipe: PE-HD

Length: 6m

Approvals:



Specifications

Article information

port 1 Pipe end

Technical properties

pipe weight 3,71 kg/m

pipe contents 1,195 l/m

PN PN 16

Product information

casing DA 110

VPE1 6,00 STG

L 6 m

weight 3,040 KGM


text STEELFIX-PE stainless steel pipe 1.4401

INTRNR 73064080

main material group STEELFIX CX/PE

material group STEELFIX CX/PE stainless steel pipes and fittings

code NF2000

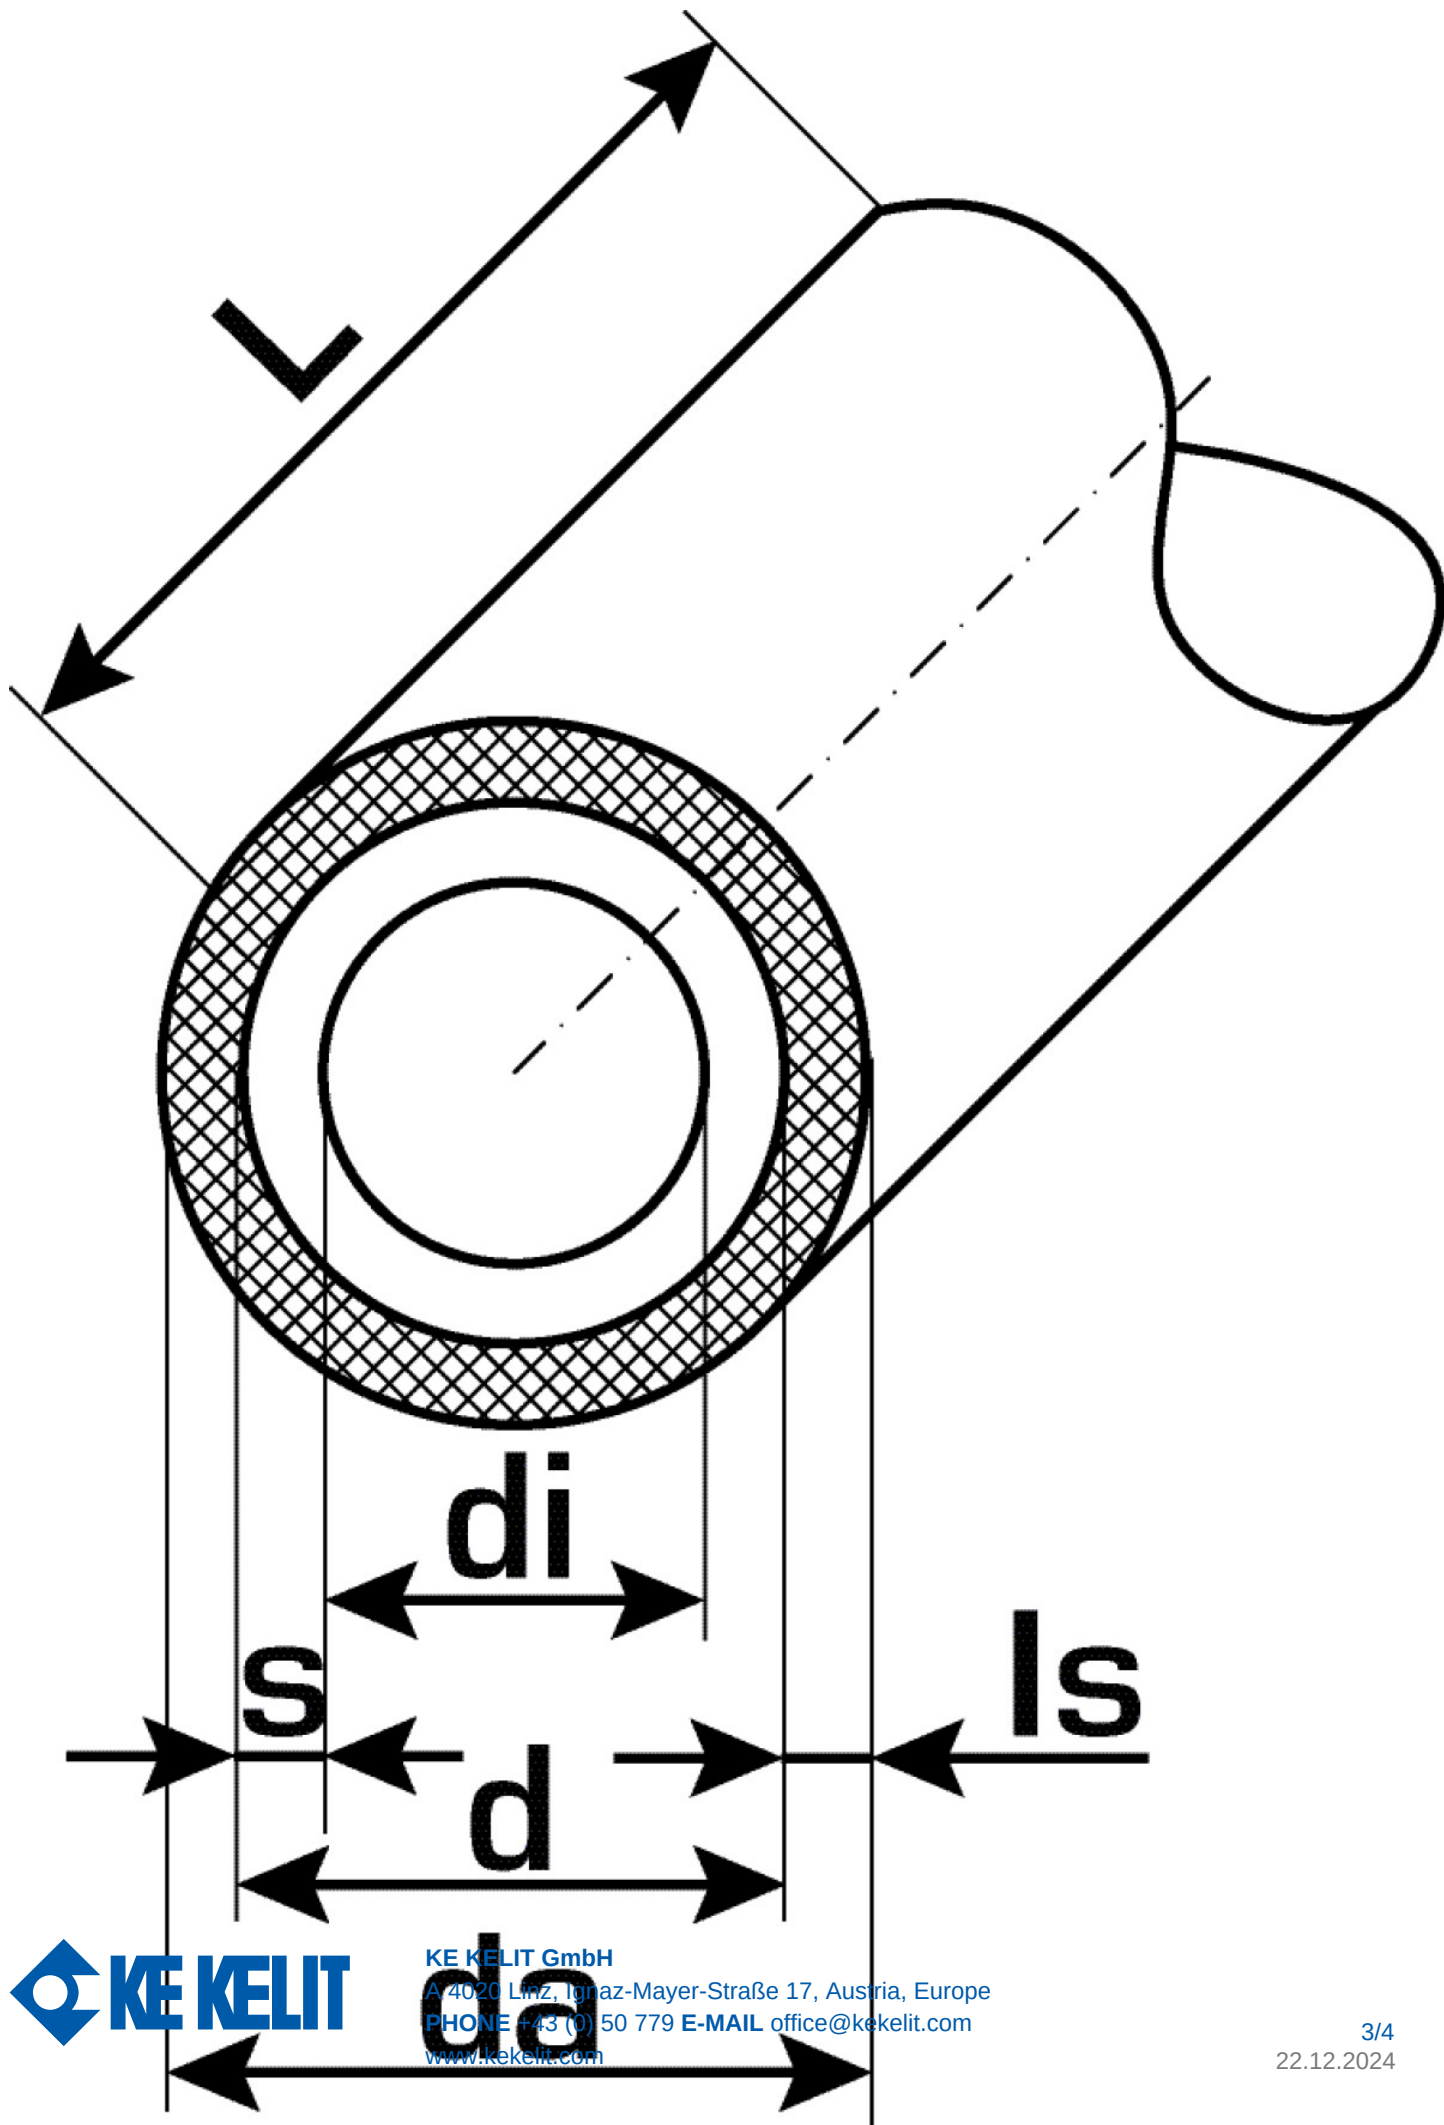

Art. No	label	d	d1 mm	pipe contents l/m	s mm
3000375	42x1.5	39	42	1,195	1,5