


# KELEN

## KE36-LX4 KELEN PP-RCT LX-SENSO tee reduced in the flow 20/25/20

2580141

### Areas of application

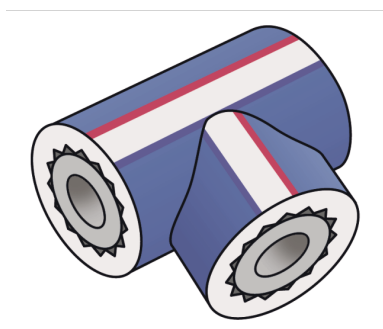

KELEN PP-RCT SENSO Polyfusion welding fitting for connecting pipes with fittings made of the same material (no reduction of internal diameter) and a factory-installed 4mm soft-foam insulation, can be located electronically, outer layer consisting of woven tape fabric and viscoplastic polymer alloy

## Approvals:



# Specifications

## Article information


port 1	Kunststoffschweißmuffe
port 2	Kunststoffschweißmuffe
port 3	Kunststoffschweißmuffe
execution	T-Stück
angle	90 °

## Technical properties

maximum working pressure at 20 ° C	20 bar
isolation thickness	4 mm

## Product information

VPE1	10,00 SA1
VPE2	50,00 KT1
VPE3	300,00 KT2
VPE4	4800,00 PAL
weight	0,057 KGM
text	KELEN PP-RCT LX-SENSO tee reduced in the flow
INTRNR	39174000
main material group	KELEN
material group	KELEN-LX fittings
code	KE36-LX4

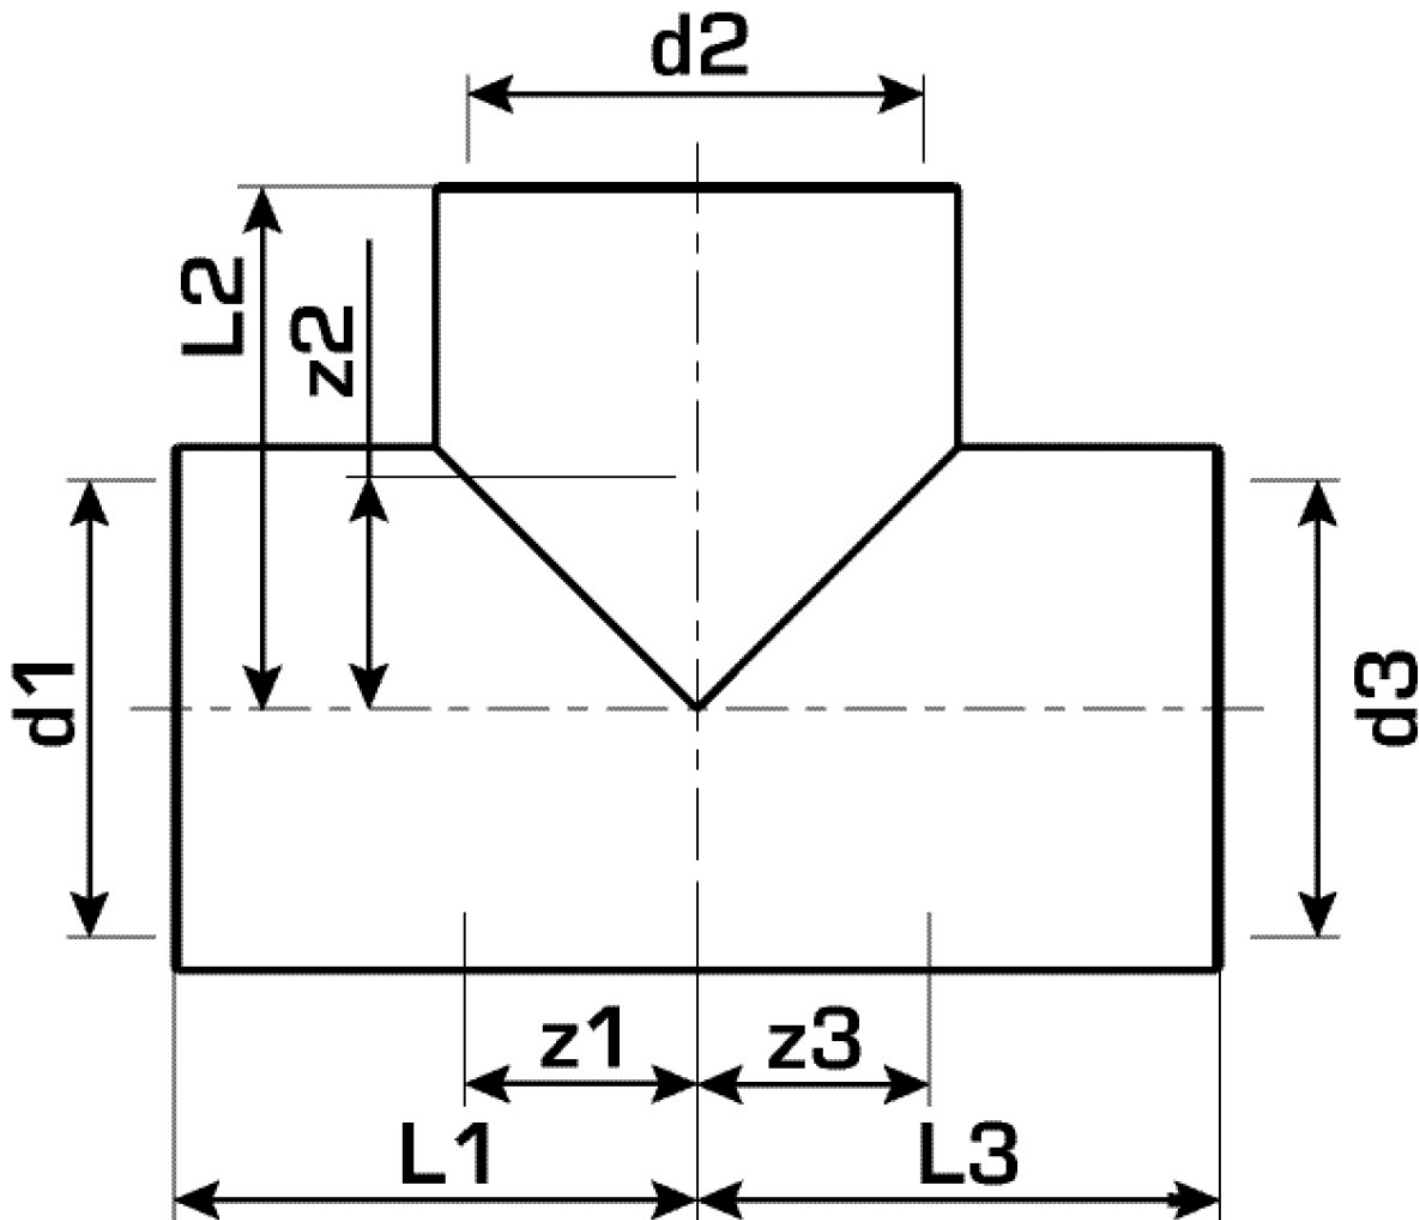

Art. No	label	d1 mm	d2 mm	d3 mm	L1 mm	L2 mm	L3 mm	z1 mm	z2 mm	z3 mm
2580141	20/25/20	25	20	20	34	34	34	14	18	18