


STEELOX

SMX110 STEELOX multilayer composite pipe 25x2.5 / 5m

57005E00

Areas of application

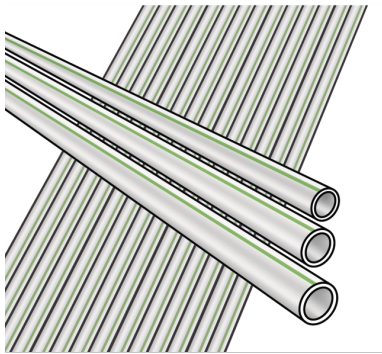

STEELOX pipe conforming to ÖNORM B 5175, oxygen- and steam diffusion-tight multi-layer composite pipe made of stainless steel/PE-RT

Classification of operating conditions as per ÖNORM B 5175 - Class 2:

70°C/10 bar, max. operating temperature up to 80°C - accident temperature 100°C (max. 100h)

Colour: silver with green longitudinal stripes

Rod length: 5m

Approvals:



Specifications

Article information

| | |
|--------------|--|
| color | Silver with green longitudinal stripes |
| flexible | Yes |
| trade length | 5 m |
| isolation | No |

Technical properties

| | |
|------------------------------------|----------------|
| maximum working pressure at 20 ° C | 10 bar |
| pipe weight | 0,22 kg/m |
| pipe contents | 0,314 l/m |
| lambda pipe | 0,45 W/(m.K) |
| wall rawness | 0,01 mm |
| expansion coefficient | 0,045 mm/(m.K) |

Product information

| | |
|--------|-----------------------------------|
| VPE1 | 50,00 BND |
| VPE2 | 1650,00 HOB |
| L | 5 m |
| weight | 0,251 KGM |
| text | STEELOX multilayer composite pipe |
| INTRNR | 39173900 |
| code | SMX110 |



| Art. No | label | d1 mm | pipe contents l/m | s mm |
|----------|-------------|-------|-------------------|------|
| 57005E00 | 25x2.5 / 5m | 25 | 0,314 | 2,5 |



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com