


KETRIX

TRI36 KETRIX tee reduced in the flow 32/32/20

55118FFD

Areas of application

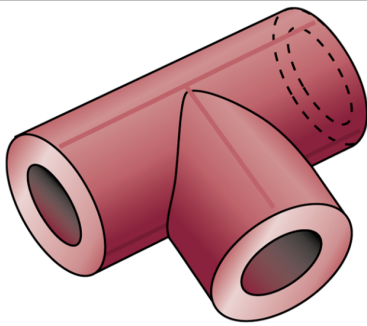

KETRIX polyfusion weld fitting for connecting POB pipes to fittings made of the same material without narrowing the cross section

Specifications

Technical properties

maximum working pressure at 20 ° C	16 bar
---	--------

Product information

VPE1	5,00 SA1
VPE2	30,00 KT1
VPE3	180,00 KT2
VPE4	2880,00 PAL
weight	0,099 KGM
text	KETRIX tee reduced in the flow
INTRNR	39174000
main material group	KETRIX
material group	KETRIX plastic fittings
code	TRI36



Art. No	label
55118FFD	32/32/20