


# CLIMATE FIX

KC150B16 CLIMATEFIX near surface - thermal activated concrete - 150 150/16

6352150

## Areas of application

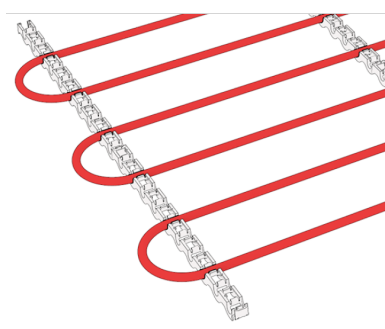

?Near-surface cooling and heating ceiling module for installation on the ceiling formwork. Composed of a prefabricated pipe register (PVC-free), pipe spacing 150mm, made of ULTRA PE-RT pipe type 2 conforming to ÖNORM EN ISO 22391, with an oxygen-tight EVOH barrier protected with PE-RT coating in accordance with DIN 4726, pre-installed on the KC610B clamping rail. The fire behaviour of in-situ concrete ceilings with integrated, near-surface arranged pipe registers has been proven in a fire test acc. to EN 1363-1/EN 1365-2 to comply with fire-resistance class REI 90

Module size freely selectable up to max. 6m<sup>2</sup> with a max. side length of 6m

Pipe spacing: 150mm

Pipeline length: approx. 7m/m<sup>2</sup>



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

Application area - pipe: tmax 70°C/6 bar

The modules are manufactured for the respective project - NO return possible!



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe


**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

## Product information

VPE1	1,00 M2
weight	1,078 KGM
text	CLIMATEFIX near surface - thermal activated concrete - 150
INTRNR	73142090
main material group	CLIMATEFIX
material group	CLIMATEFIX module
code	KC150B16

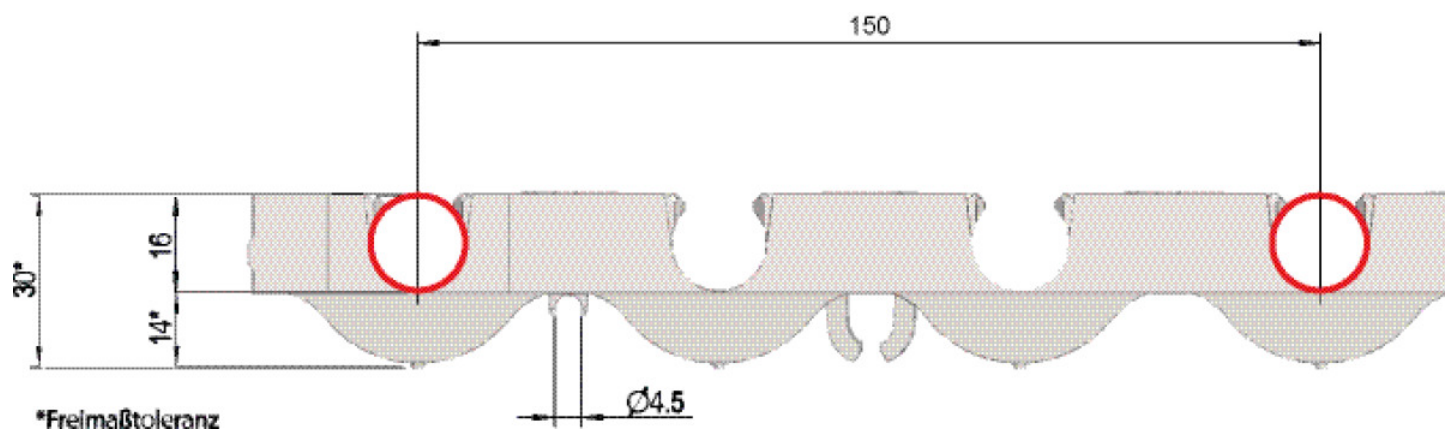

Art. No	label
6352150	150/16