


# CLIMATE FIX

KC590 CLIMATEFIX manifold 5/4" 6 L:500mm

7961250

## Areas of application

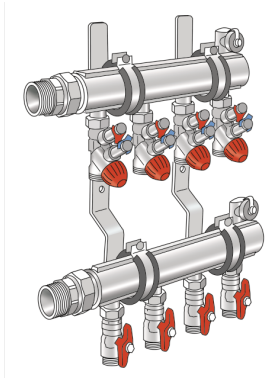

?Flow and return flow bars (5/4") with cooling and heating circuit outlets 3/4" Eurocone male, connection options through turnable valves at the connection points, with a bleeding and/or flushing connection at the highest point, connections with a pre-formed cap nut 6/4" flat-sealing and reduction nipple 5/4" male, manifold ends closed. At the flow compact valve, control valve, regulator valve, shut-off valve and measuring valve 3/4" Euro-cone male, precise regulation with adjusting tools of 0.5 - 9.0 l/min pre-settable, which unites the functions zone valve and line regulator valve. Flow and differential pressure measuring can be logged using a monitoring computer, top parts fit KM596 KELOX thermal motor, at the return flow ball valve 3/4" Euro-cone male, non-porous metallised brass, incl. sound-proofed steel consoles to fasten the manifold bars.

Application area: tmax. 80°C/6 bar



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

ATTENTION: WITHOUT KM220 Euro thread fitting!



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe


**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

## Product information

<b>VPE1</b>	1,00 KT1
<b>weight</b>	12,200 KGM
<b>text</b>	CLIMATEFIX manifold 5/4"
<b>INTRNR</b>	84818039
<b>main material group</b>	CLIMATEFIX
<b>material group</b>	CLIMATEFIX fittings
<b>code</b>	KC590

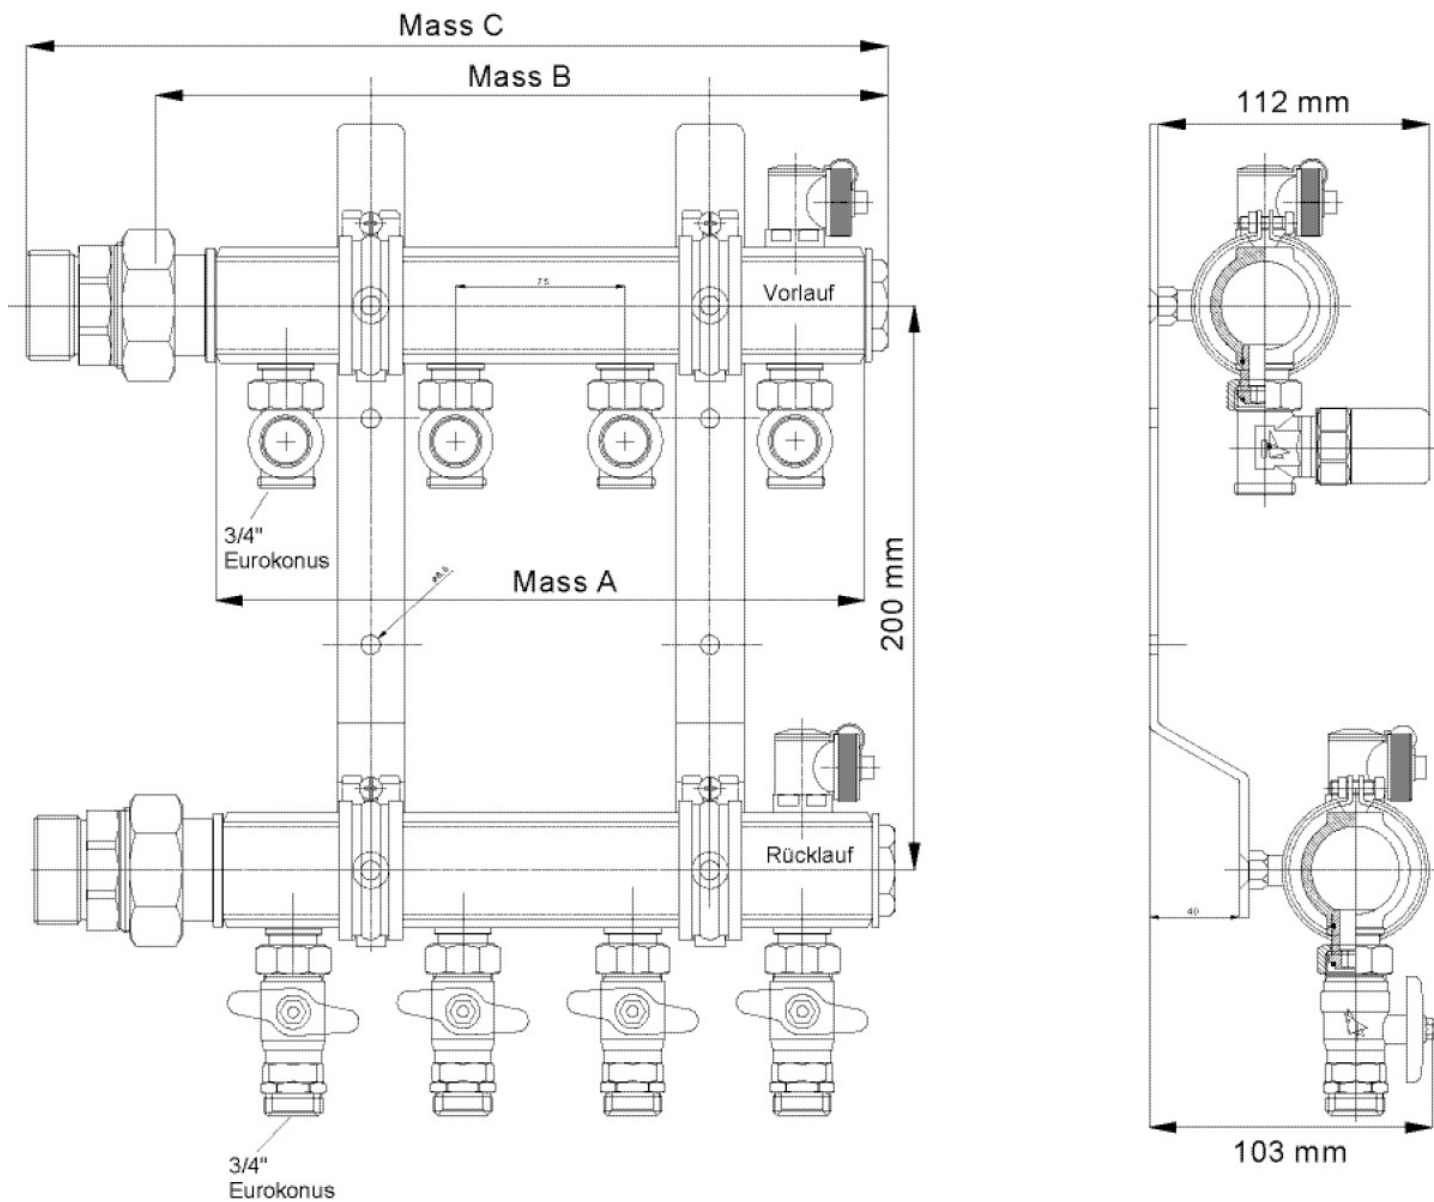

Art. No	label
7961250	6 L:500mm



**KE KELIT GmbH**  
 A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe  
**PHONE** +43 (0) 50 779 **E-MAIL** office@kekelit.com  
[www.kekelit.com](http://www.kekelit.com)