


KM100 ?KELOX multilayer pipe 20x2.25/50

75212050

Areas of application

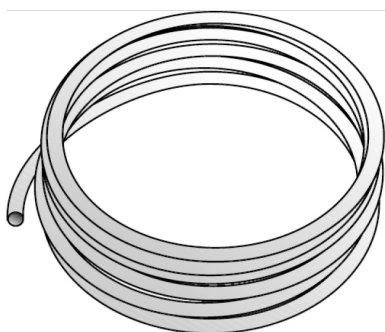

?KELOX multilayer pipe conforming to ÖNORM EN ISO 21003, oxygen-and water vapour diffusion-tight 5-layer PE-RT/Al/PE-RT composite pipe

Operating conditions classified acc. to ÖNORM EN ISO 21003

Sanitary application - Class 2: 70°C - tmax 80°C/10 bar

Radiator connection - Class 5: 80°C - tmax 90°C/10 bar

Colour: white/transparent

Supplied in coils

Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL office@kekelit.com

www.kekelit.com

Specifications

Article information

color weiß

flexible 1

Technical properties

maximum working pressure at 20 ° C 10 bar

pipe weight 0,15 kg/m

pipe contents 0,189 l/m

lambda pipe 0,45 W/(m.K)

wall rawness 0,007 mm

expansion coefficient 0,025 mm/(m.K)

Product information

VPE1 50,00 ROL

VPE2 250,00 KT1

VPE3 1000,00 PAL

L 50 m

weight 0,157 KGM

text ?KELOX multilayer pipe

INTRNR 39173900

main material group KELOX

material group KELOX pipes

code KM100



| Art. No | label | d1 mm | pipe contents l/m | s mm |
|----------|------------|-------|-------------------|------|
| 75212050 | 20x2.25/50 | 20 | 0,189 | 2,25 |



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com