


KELOX_{FB}

KM694K KELOX wireless room thermostat, digital
86x86x26,5mm

5881330

Areas of application

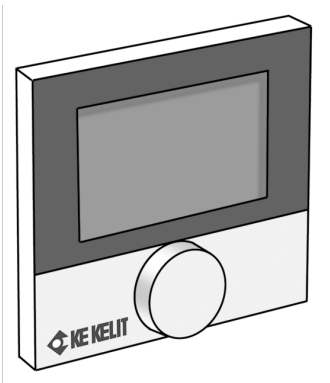

Surface-mount digital wireless room thermostat with backlit display as a signal transmitter to the KM695B bus wireless receiver and, in addition, to control 24V thermal motors; can also be used for programming the KM695B receiver; KM699 floor sensor can be connected

Hysteresis: +/- 0.3 K

Contact: 1 NCC

Setting range: 5°C - 30°C

Protection type/class: IP 20

Wireless frequency: 868 MHz

Power supply: 2xAAA Batteries (included)



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Size: 86x86x26.5mm

Colour: white (RAL 9003)

ATTENTION: Can only be operated in conjunction with the KM695B or KM695S!



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

| Product information | |
|---------------------|---|
| VPE1 | 1,00 KT1 |
| VPE2 | 50,00 KT2 |
| weight | 0,110 KGM |
| text | KELOX wireless room thermostat, digital |
| INTRNR | 90321020 |
| code | KM694K |

| Art. No | label |
|---------|--------------|
| 5881330 | 86x86x26,5mm |