


# KELOX<sub>FB</sub>

KM636T KELOX FB hybrid Velcro staple roll,  
Supersilent 30/2 hybrid roll 6.5KN/m<sup>2</sup>

6060520

## Areas of application

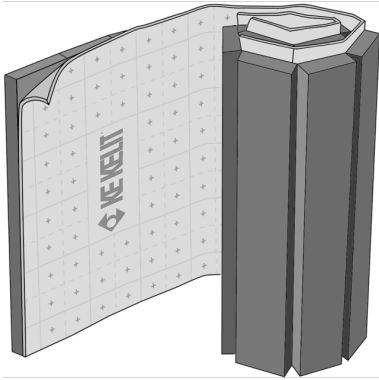

expanded polystyrene rigid foam board for stapling or adhesion, on approved insulation layers installed on site

Top 6mm PE foam film with Velcro non-woven lining for Velcro fastening of KELOX-ULTRAX FB Velcro tubes and ULTRA PE-RT Velcro tubes

or for stapling KELOX-ULTRAX FB, ULTRA PE-RT pipes using KM611 staples, with infrared reflectors, HFC- and CFC-free, incl. adhesive overlap edge.

"Super Silent" version

Thickness: 30mm (24mm EPS-T plus +6 mm PE foam film)

Load-bearing capacity: max. 6.5KN/m<sup>2</sup>



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 E-MAIL [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

Dynamic rigidity Lambda value thermal conductivity: 0.033W/mK.

Impact sound improvement measure: 33 dB

Water vapour diffusion equivalent air layer thickness -sd-value: approx.35m

Compressibility: 2mm

Supplied in coils: 12x1m

ATTENTION: Protect from direct sunlight, do not store outdoors!



**KE KELIT GmbH**

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

**PHONE** +43 (0) 50 779 **E-MAIL** [office@kekelit.com](mailto:office@kekelit.com)

[www.kekelit.com](http://www.kekelit.com)

# Specifications

Product information	
VPE1	12,00 SA1
VPE2	84,00 PAL
weight	3,650 KGM
text	KELOX FB hybrid Velcro staple roll, Supersilent
INTRNR	39211100
code	KM636T

Art. No	label
6060520	30/2 hybrid roll 6.5KN/m <sup>2</sup>