


# KELOX<sub>FB</sub>

KMU590E ?KELOX-ULTRAX FB manifold 8 RL  
replacement bar L: 525mm

790260008

## Areas of application

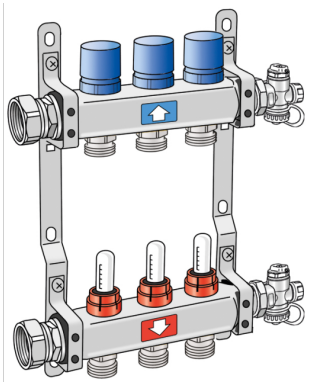


?Stainless steel flow and return flow bar with heating circuit outlets 3/4" Eurocone male, with bleeding and emptying at the manifold end, connections with screwed-in cap nut 1" flat-sealing. Return flow valve bonnets suitable for KM596 KELOX thermal motor, flow water meter of 0.5-5.0 l/min adjustable, incl. sound-insulated steel consoles  
Application area: tmax. 70°C/6 bar

ATTENTION: WITHOUT KM220 Euro thread fitting!

# Specifications

## Product information

<b>VPE1</b>	1,00 KT1
<b>weight</b>	2,260 KGM
<b>text</b>	?KELOX-ULTRAX FB manifold
<b>INTRNR</b>	84818099
<b>code</b>	KMU590E

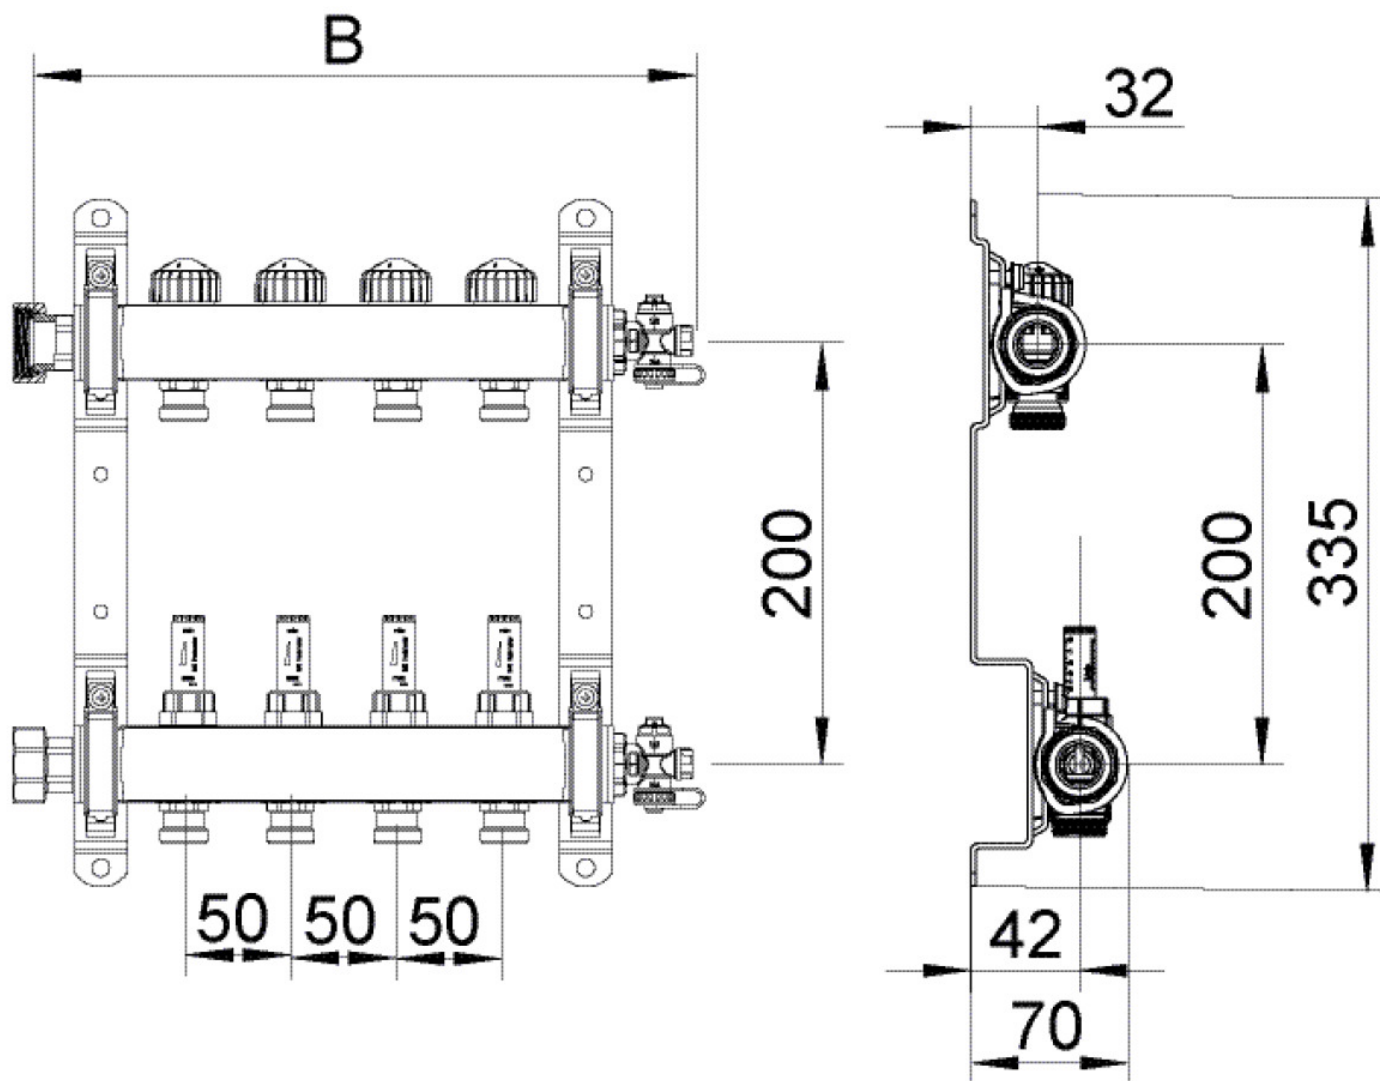

Art. No

label

790260008

8 RL replacement bar L: 525mm