


KELOX

KMU100 KELOX-ULTRAX multilayer pipe 12x1.5

7021207

Areas of application

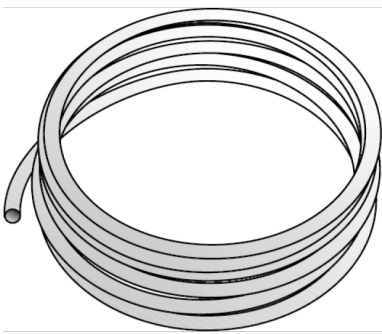

?KELOX-ULTRAX multilayer pipe for CLIMATEFIX based on ÖNORM EN ISO 21003, an oxygen- and water vapour diffusion-tight 5-layer PE-RT/Al/PE-RT composite pipe

Application range: 60°C - tmax 70°C/10 bar

Colour: white/transparent

Supplied in coils

ATTENTION - This is NOT a drinking water and radiator connection pipe!

Approvals:



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com

Specifications

Article information

color	White
flexible	1
isolation	0

Technical properties

maximum working pressure at 20 ° C	10 bar
pipe weight	0,09 kg/m
pipe contents	0,064 l/m
lambda pipe	0,45 W/(m.K)
wall rawness	0,007 mm
expansion coefficient	0,025 mm/(m.K)

Product information

VPE1	700,00 ROL
L	700 m
weight	0,060 KGM
text	KELOX-ULTRAX multilayer pipe
INTRNR	39173900
main material group	KELOX
material group	KELOX-ULTRAX pipes
code	KMU100



Art. No	label	d1 mm	pipe contents l/m	s mm
7021207	12x1.5	12	0,064	1,5



KE KELIT GmbH

A 4020 Linz, Ignaz-Mayer-Straße 17, Austria, Europe

PHONE +43 (0) 50 779 **E-MAIL** office@kekelit.com

www.kekelit.com