


# TRI2008 KETRIX PE pipe - PN16 90x12.3

3019180

## Areas of application

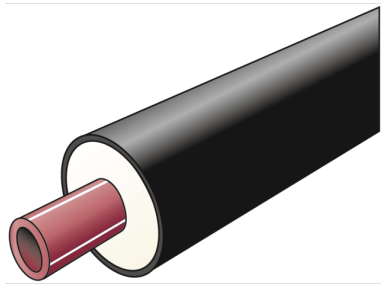

Pre-insulated industrial piping system based on ÖNORM EN ISO 15874

Medium pipe: d20-125 = TRI08, adhesion-pretreated

Application area: 20°C/16 bar - from -30°C to +40°C/10 bar

Insulation: PUR rigid foam

Jacket pipe: PE-HD

Length: 6m

# Specifications

| Product information        |                                 |
|----------------------------|---------------------------------|
| <b>casing DA</b>           | 200                             |
| <b>VPE1</b>                | 6,00 STG                        |
| <b>L</b>                   | 6 m                             |
| <b>weight</b>              | 6,790 KGM                       |
| <b>text</b>                | KETRIX PE pipe - PN16           |
| <b>INTRNR</b>              | 39172290                        |
| <b>main material group</b> | KETRIX CX/PE                    |
| <b>material group</b>      | KETRIX CX/PE pipes and fittings |
| <b>code</b>                | TRI2008                         |

| Art. No | label   |
|---------|---------|
| 3019180 | 90x12.3 |