


KELEN

KE36-LX4 KELEN PP-RCT LX-SENSO tee reduced in the flow 32/25/20

2580441

Areas of application



KELEN PP-RCT SENSO Polyfusion welding fitting for connecting pipes with fittings made of the same material (no reduction of internal diameter) and a factory-installed 4mm soft-foam insulation, can be located electronically, outer layer consisting of woven tape fabric and viscoplastic polymer alloy

Approvals:



Specifications

Article information


| | |
|-----------|------------------------|
| port 1 | Kunststoffschweißmuffe |
| port 2 | Kunststoffschweißmuffe |
| port 3 | Kunststoffschweißmuffe |
| execution | T-Stück |
| angle | 90 ° |

Technical properties

| | |
|------------------------------------|--------|
| maximum working pressure at 20 ° C | 20 bar |
| isolation thickness | 4 mm |

Product information

| | |
|---------------------|---|
| VPE1 | 5 SA1 |
| VPE2 | 25 KT1 |
| VPE3 | 150 KT2 |
| VPE4 | 2400 PAL |
| weight | 0,11 KGM |
| text | KELEN PP-RCT LX-SENSO tee reduced in the flow |
| INTRNR | 39174000 |
| main material group | KELEN |
| material group | KELEN-LX fittings |
| code | KE36-LX4 |

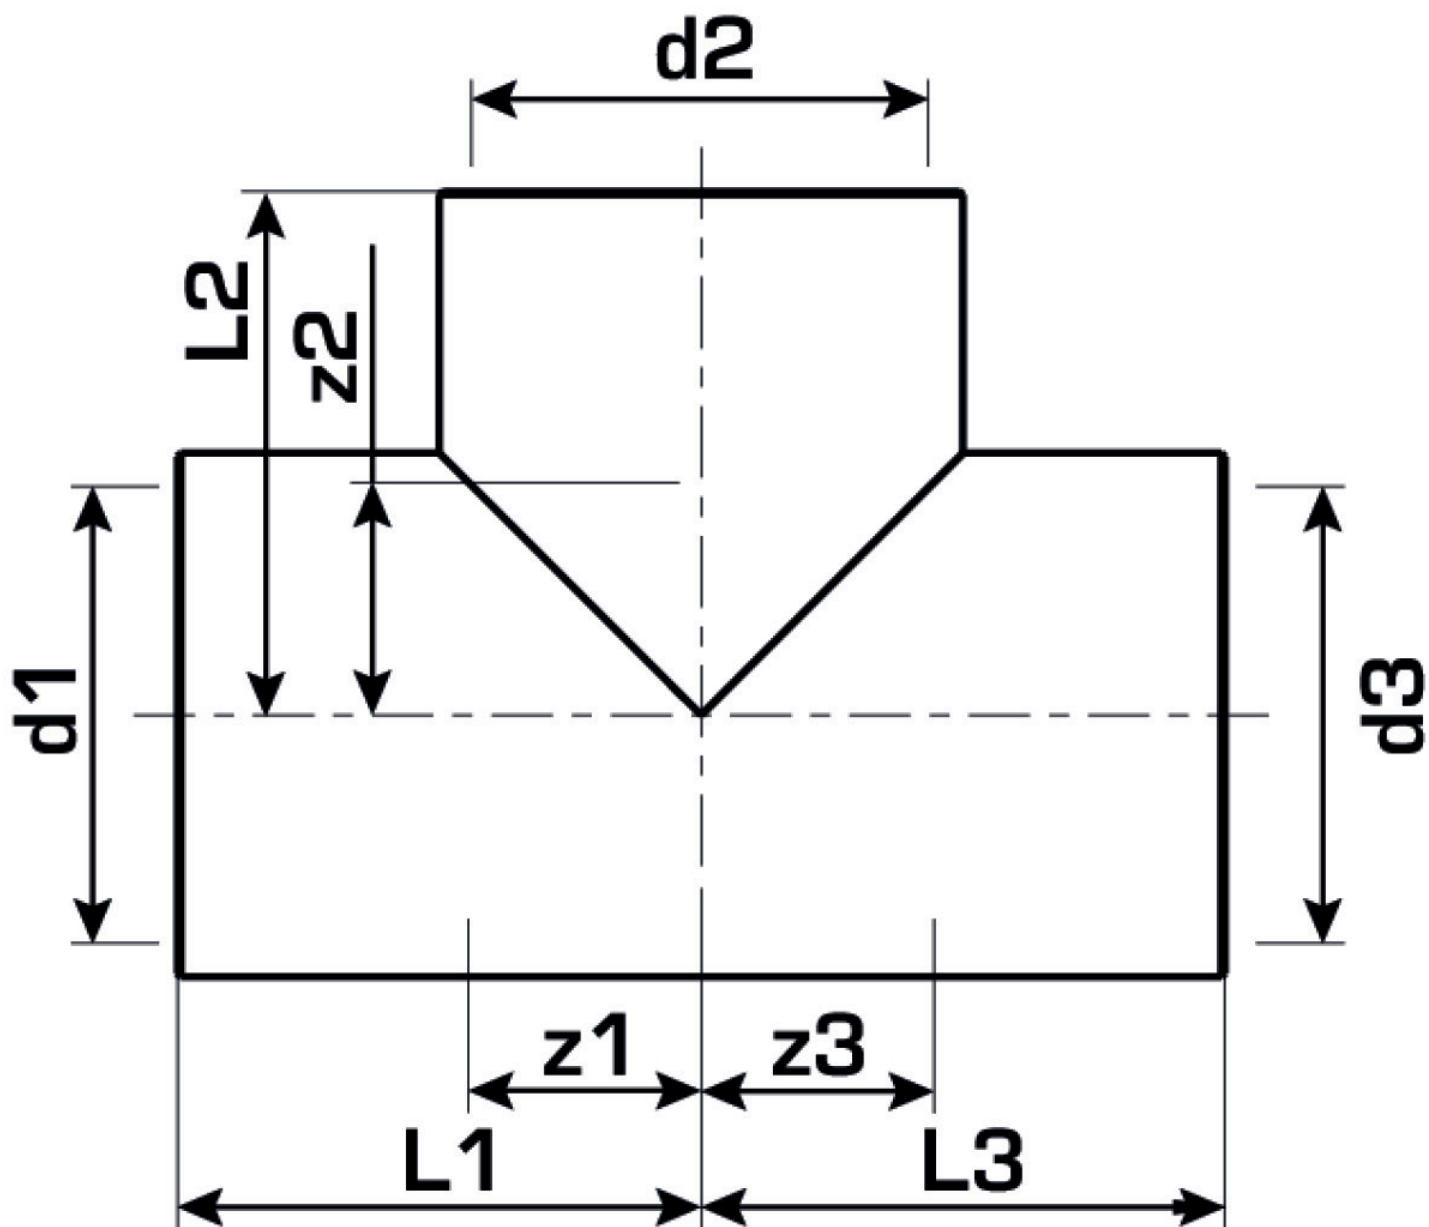

| Art. No | label | d1 mm | d2 mm | d3 mm | L1 mm | L2 mm | L3 mm | z1 mm | z2 mm | z3 mm |
|---------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 2580441 | 32/25/20 | 32 | 25 | 20 | 44 | 38 | 42 | 17 | 17 | 24 |