


KELOX

KMU450 KELOX-ULTRAX adaptor male 20x1"

71202D05

Areas of application

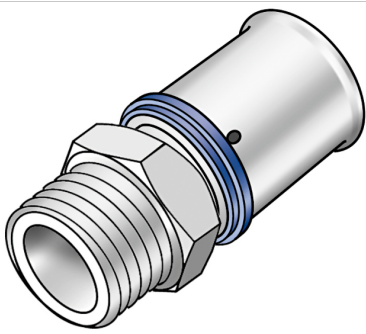

Press adaptor with male thread for sealing, made of non-porous metallized brass, incl. support sleeves with O-rings and steel or stainless steel press-fit sleeves, "leak before pressed"

Approvals:



Specifications

Article information


| | |
|---------------|----------------------------|
| port 1 | Pressing socket |
| port 2 | Male thread, conical (NPT) |
| execution | 1-part |
| design | Straight |
| press contour | U |

Technical properties

| | |
|------------------------------------|----|
| maximum working pressure at 20 ° C | 10 |
|------------------------------------|----|

Product information

| | |
|---------------------|-----------------------------|
| VPE1 | 10 SA1 |
| VPE2 | 100 KT1 |
| weight | 0,122 KGM |
| text | KELOX-ULTRAX adaptor male |
| INTRNR | 74122000 |
| main material group | KELOX |
| material group | KELOX-ULTRAX metal fittings |
| code | KMU450 |

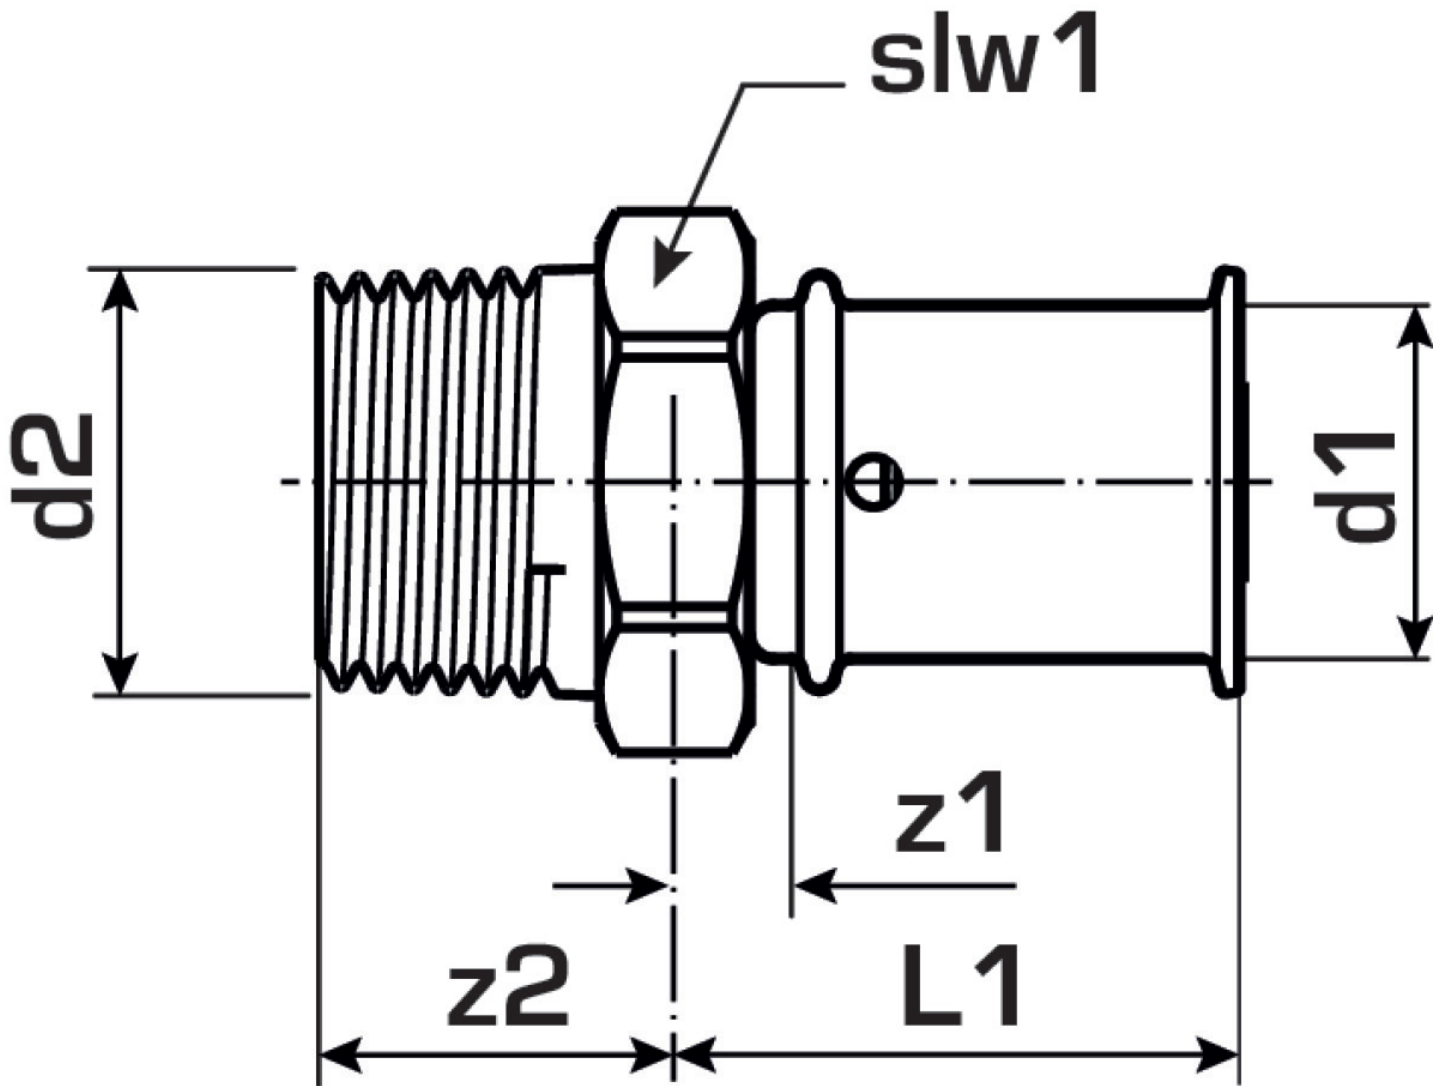

| Art. No | label | d2 | d1 mm | L1 | z1 mm | z2 mm | slw1 |
|----------|-------|---------|-------|----|-------|-------|------|
| 71202D05 | 20x1" | 1" (25) | 20 | 39 | 5 | 25 | 38 |